ViewSonic VX2718-2KPC-mhd


Key **Features**

- 165Hz refresh rate delivers fluid, tear-free visuals
- Rapid 1ms (MPRT) response time for crisp movements
- QHD 1440p resolution
- AMD FreeSync™ Premium prevents screen tearing
- 1500R curved screen for a perfect balance of immersion and comfort



Product **Description**

With an immersive curved screen and 165Hz refresh rate, the ViewSonic VX2718-2KPC-MHD provides a stunning viewing experience. The monitor has been designed with a 1500R curved and borderless panel for an immersive experience. A high 165Hz refresh rate delivers smooth animations with minimal input lag while AMD FreeSync™ Premium prevents screen tearing and stuttering for a fluid gaming experience. With 1ms MPRT response time, the monitor delivers unprecedented screen quality and speed. VX2718-2KPC-MHD is also equipped with ViewSonic's exclusive ViewMode™ presets, which offer optimized screen performance for different home entertainment applications, such as watching movies, editing, or playing video games. In addition, a DisplayPort and two HDMI inputs offer flexible connectivity for both general use and entertainment.

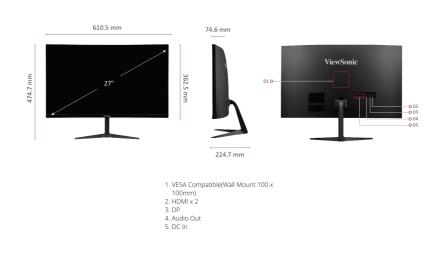

Visit Us www.viewsonic.com

VI	Titips://www.viewsori	ic.com/giobai/products/snee	W VAZI 10-ZNF C-WII ID
DISPLAY		ERGONOMICS	
Display Size (in.):	27	Tilt (Forward/Back):	-5° / 20°
Viewable Area (in.):	27	WEIGHT (IMPERIAL)	
Panel Type:	VA Technology	Net (lbs):	8.6
Resolution:	2560 x 1440	Net Without Stand (lbs):	7.3
Resolution Type:	QHD (Quad HD)	Gross (lbs):	12.1
Static Contrast Ratio:	4,000:1 (typ)	WEIGHT (METRIC)	
Dynamic Contrast Ratio:	80M:1	Net (kg):	3.9
Light Source:	LED	Net Without Stand (kg):	3.3
Brightness:	250 cd/m² (typ)	Gross (kg):	5.5
Colors:	16.7M	DIMENSIONS (IMPERIAL) (W	/XHXD)
Color Space Support:	8 bit (6 bit + FRC)	Packaging (in.):	27 x 17.4 x 6.1
Aspect Ratio:	16:9	Physical (in.):	24 x 18.7 x 8.8
Response Time (MPRT):	1ms	Physical Without Stand (in.):	24 x 14.3 x 2.9
,		DIMENSIONS (METRIC) (WX	HXD)
Viewing Angles:	178° horizontal, 178° vertical	Packaging (mm):	687 x 443 x 156
Backlight Life (Hours):	30000 Hrs (Min)	Physical (mm):	611 x 475 x 225
Curvature:	1500R	Physical Without Stand (mm):	611 x 363 x 75
Refresh Rate (Hz):	165	GENERAL	
Adaptive Sync:	FreeSync		cTUVus, FCC-B, ICES003, CEC,
Blue Light Filter:	Yes	Regulations:	NOM, Mexico Energy, CE, CE EMC, CB, RoHS, ErP, REACH, WEEE,
Flicker-Free:	Yes	. togulations.	EAC, UkrSEPRO, UKCA, BSMI,
Color Gamut:	NTSC: 72% size (Typ) sRGB: 102% size (Typ)		RCM, KC, e-Standby VX2718-2KPC-MHD x1, 3-pin Plug (IEC C13 / CEE22) x1, DisplayPort
Pixel Size:	0.233 mm (H) x 0.233 mm (V)	PACKAGE CONTENTS:	Cable (v1.2; Male-Male) x1, AC/DC
Surface Treatment:	Anti-Glare, Hard Coating (3H)		Adapter x1, Quick Start Guide x1
COMPATIBILITY		Recycle/Disposal:	Please dispose of in accordance with local, state or federal laws.
PC Resolution (max):	2560x1440	Warranty:	*Warranty offered may differ from
Mac® Resolution (max):	2560x1440	warranty.	market to market
PC Operating System:	Windows 11 certified; macOS tested		
Mac® Resolution (min):	2560x1440		
CONNECTOR			
3.5mm Audio Out:	1		
HDMI 2.0:	2		
DisplayPort:	1		
Power in:	DC Socket (Center Positive)		
AUDIO			
Internal Speakers:	2Watts x2		
POWER			
Eco Mode (Conserve):	22W		
Eco Mode (optimized):	26W		
Consumption (typical):	31W		
Consumption (max):	35W		
Voltage:	AC 100-240V		
Stand-by:	0.5W		
Power Supply:	External Power Adaptor		
	External Fower Adaptor		
ADDITIONAL HARDWARE	1		
Kensington Lock Slot: CONTROLS			
Physical Controls:	Key 1 (power), Key 2, Key 3, Key 4, Key 5 (favorite)		
On Screen Display:	Input Select, Audio Adjust, ViewMode, Color Adjust, Manual		
ODEDATING CONTINUES	Image Adjust, Setup Menu		
OPERATING CONDITIONS	20°E to 104°E (0°C to 10°C)		
Temperature:	32°F to 104°F (0°C to 40°C)		
Humidity (non-condensing):	20% to 90%		
WALL MOUNT	75 76		
VESA Compatible:	75 x 75 mm		
INPUT SIGNAL Frequency Horizontal:	HDMI (v2.0): 30 ~ 222KHz,		
Frequency Vertical:	DisplayPort (v1.2): 30 ~ 243KHz HDMI (v2.0): 48 ~ 144Hz, DisplayPort		
VIDEO INDUT	(v1.2): 48 ~ 165Hz		

Copyright © ViewSonic Corporation 2000-2022. All rights reserved.

TMDS - HDMI (v2.0), PCI-E -DisplayPort (v1.2)

Frequency Vertical: **VIDEO INPUT**

Digital Sync: