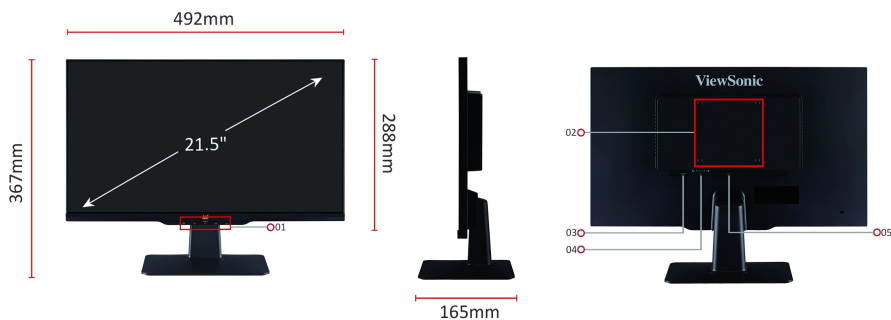**ViewSonic**®

LCD DISPLAY
# VA2201-H

## Key **Features**

- SuperClear® VA panel technology
- Eye-care technology for comfortable viewing
- Eco-mode for low energy consumption
- ViewMode color rendering options
- HDMI and VGA Input for connectivity

## Product **Description**

The ViewSonic VA2201-H is a 22" Full HD monitor with HDMI and VGA input for business or home usage. Delivering a stunning image quality with low power consumption, this monitor provides six ViewMode presets that deliver optimized screen performance in different applications. Even if used for games, users can move without screen tearing. Besides, the Eye-Care technology helps to eliminate eyestrain from extended viewing periods. With VESA-compatible mount support, this monitor is easy to setup on the wall.

492mm
367mm
21.5"
288mm
165mm
02
03
04
05
01

1. Menu Control Panel
2. VESA Compatible(Wall Mount 100 x 100mm)
3. HDMI
4. VGA
5. DC in

**Visit Us**    www.viewsonic.com

## DISPLAY

| | |
|---|---|
| Display Size (in.): | 22 |
| Viewable Area (in.): | 21.5 |
| Panel Type: | VA Technology |
| Resolution: | 1920 x 1080 |
| Resolution Type: | FHD |
| Static Contrast Ratio: | 3,000:1 (typ) |
| Dynamic Contrast Ratio: | 50M:1 |
| Light Source: | LED |
| Brightness: | 250 cd/m² (typ) |
| Colors: | 16.7M |
| Color Space Support: | 8 bit true |
| Aspect Ratio: | 16:9 |
| Response Time (Typical GTG): | 4ms |
| Viewing Angles: | 178º horizontal, 178º vertical |
| Backlight Life (Hours): | 30000 Hrs (Min) |
| Curvature: | Flat |
| Refresh Rate (Hz): | 75 |
| Blue Light Filter: | Yes |
| Flicker-Free: | Yes |
| Color Gamut: | NTSC: 72% size (Typ) sRGB: 100% size (Typ) |
| Pixel Size: | 0.249 mm (H) x 0.241 mm (V) |
| Surface Treatment: | Anti-Glare, Hard Coating (3H) |

## COMPATIBILITY

| | |
|---|---|
| PC Resolution (max): | 1920x1080 |
| Mac® Resolution (max): | 1920x1080 |
| PC Operating System: | Windows 10 certified; macOS tested |
| Mac® Resolution (min): | 1920x1080 |

## CONNECTOR

| | |
|---|---|
| VGA: | 1 |
| HDMI 1.4: | 1 |
| Power in: | DC Socket (Center Positive) |

## POWER

| | |
|---|---|
| Eco Mode (Conserve): | 15W |
| Eco Mode (optimized): | 18W |
| Consumption (typical): | 22W |
| Consumption (max): | 24W |
| Voltage: | AC 100-240V |
| Stand-by: | 0.5W |
| Power Supply: | External Power Adaptor |

## ADDITIONAL HARDWARE

| | |
|---|---|
| Kensington Lock Slot: | 1 |

## CONTROLS

| | |
|---|---|
| Physical Controls: | Key 1 (favorite), Key 2, Key 3 (power), Key 4, Key 5 |
| On Screen Display: | Input Select, ViewMode, Color Adjust, Manual Image Adjust, Setup Menu |

## OPERATING CONDITIONS

| | |
|---|---|
| Temperature: | 32°F to 104°F (0°C to 40°C) |
| Humidity (non-condensing): | 20% to 90% |

## WALL MOUNT

| | |
|---|---|
| VESA Compatible: | 100 x 100 mm |

## INPUT SIGNAL

| | |
|---|---|
| Frequency Horizontal: | 24 ~ 86KHz |
| Frequency Vertical: | 48 ~ 75Hz |

## VIDEO INPUT

| | |
|---|---|
| Digital Sync: | TMDS - HDMI (v1.4) |
| Analog Sync: | Separate - RGB Analog |

## ERGONOMICS

| | |
|---|---|
| Tilt (Forward/Back): | -3º / 20º |

## WEIGHT (IMPERIAL)

| | |
|---|---|
| Net (lbs): | 5.3 |
| Net Without Stand (lbs): | 4.9 |
| Gross (lbs): | 7.7 |

## WEIGHT (METRIC)

| | |
|---|---|
| Net (kg): | 2.4 |
| Net Without Stand (kg): | 2.2 |
| Gross (kg): | 3.5 |

## DIMENSIONS (IMPERIAL) (WXHXD)

| | |
|---|---|
| Packaging (in.): | 21.9 x 13.8 x 4.7 |
| Physical (in.): | 19.4 x 14.4 x 6.5 |
| Physical Without Stand (in.): | 19.4 x 11.3 x 1.6 |

## DIMENSIONS (METRIC) (WXHXD)

| | |
|---|---|
| Packaging (mm): | 555 x 350 x 120 |
| Physical (mm): | 492 x 367 x 165 |
| Physical Without Stand (mm): | 492 x 288 x 40 |

## GENERAL

| | |
|---|---|
| Regulations: | CE, CE EMC, CB, RoHS, ErP, REACH, WEEE, EAC, UkrSEPRO, UKCA |
| PACKAGE CONTENTS: | VA2201-H x1, HDMI Cable (v1.4; Male-Male) x1, AC/DC Adapter x1, Quick Start Guide x1 |
| Recycle/Disposal: | Please dispose of in accordance with local, state or federal laws. |
| Warranty: | *Warranty offered may differ from market to market |