

ViewSonic® LCD DISPLAY

VG2409-MHU


Key Features

- SuperClear® IPS panel
- HDMI, VGA, and USB-C 3.2 inputs for simple connectivity and 65W power delivery
- Super narrow bezel with dual 2W speakers
- Ergonomic tilt, swivel, pivot and height adjustment capabilities
- 75Hz Refresh rate delivers fluid visuals



Product Description

The ViewSonic VG2409-MHU is a 24" Full HD monitor featuring HDMI, VGA and USB-C inputs for business and home use. Simplify your work with just one cable that provides audio and video, 65W power transfer. The variable refresh rate, eye-care technology, and various ViewMode presets cater for optimal screen performance and comfortable viewing without tearing or stuttering. Expand your workspace and experience truly seamless, ergonomic multitasking on just one screen with a VESA-compatible mount at low energy consumption.

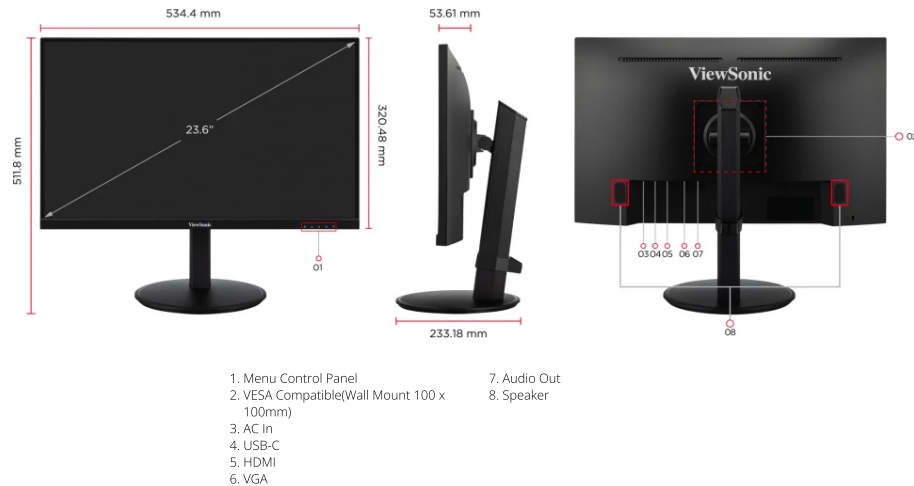

Visit Us www.viewsonic.com

DISPLAY

Display Size (in.):	24
Viewable Area (in.):	23.6
Panel Type:	IPS Technology
Resolution:	1920 x 1080
Resolution Type:	FHD (Full HD)
Static Contrast Ratio:	1,000:1 (typ)
Dynamic Contrast Ratio:	50M:1
Light Source:	LED
Brightness:	250 cd/m ² (typ)
Colors:	16.7M
Color Space Support:	8 bit (6 bit + FRC)
Aspect Ratio:	16:9
Response Time (Typical GTG):	5ms
Response Time (GTG w/OD):	5ms
Viewing Angles:	178° horizontal, 178° vertical
Backlight Life (Hours):	30000 Hrs (Min)
Curvature:	Flat
Refresh Rate (Hz):	75
Variable Refresh Rate Technology:	Yes
Blue Light Filter:	Yes
Flicker-Free:	Yes
Color Gamut:	NTSC: 72% size (Typ) sRGB: 104% size (Typ)
Pixel Size:	0.272 mm (H) x 0.272 mm (V)
Surface Treatment:	Anti-Glare, Hard Coating (3H)

COMPATIBILITY

PC Resolution (max):	1920x1080
Mac® Resolution (max):	1920x1080
PC Operating System:	Windows 10/11 certified; macOS tested
Mac® Resolution (min):	1920x1080

CONNECTOR

VGA:	1
USB 3.2 Type C DisplayPort Alt mode only :	1 (65W power charger)
3.5mm Audio Out:	1
HDMI 1.4:	1
Power in:	DC Socket (Center Positive)

AUDIO

Internal Speakers:	2Watts x2
--------------------	-----------

POWER

Eco Mode (Conserve):	10W
Eco Mode (optimized):	12W
Consumption (typical):	18W
Consumption (max):	19W
Voltage:	AC 100-240V
Stand-by:	0.5W
Power Supply:	External Power Adaptor

ADDITIONAL HARDWARE

Kensington Lock Slot:	1
Cable Organization:	Yes

CONTROLS

Physical Controls:	Key 1 (favorite), Key 2, Key 3, Key 4, Key 5 (power)
On Screen Display:	Input Select, Audio Adjust, ViewMode, Color Adjust, Manual Image Adjust, Setup Menu

OPERATING CONDITIONS

Temperature:	32°F to 104°F (0°C to 40°C)
Humidity (non-condensing):	20% to 90%

WALL MOUNT

VESA Compatible:	100 x 100 mm
------------------	--------------

INPUT SIGNAL

Frequency Horizontal:	24 ~ 86KHz
Frequency Vertical:	48 ~ 75Hz

VIDEO INPUT

Digital Sync:	TMDS - HDMI (v1.4), Micro-Packet - Type C
Analog Sync:	Separate - RGB Analog

ERGONOMICS

Height Adjust (mm):	130
Swivel:	360°
Tilt (Forward/Back):	-3.5° / 28°
Pivot (Right/Left):	90° / 90°

WEIGHT (IMPERIAL)

Net (lbs):	10.4
Net Without Stand (lbs):	5.9
Gross (lbs):	14.7

WEIGHT (METRIC)

Net (kg):	4.7
Net Without Stand (kg):	2.7
Gross (kg):	6.7

DIMENSIONS (IMPERIAL) (WXHxD)

Packaging (in.):	24.5 x 20.5 x 5.7
Physical (in.):	21 x 15.03~20.15 x 9.2
Physical Without Stand (in.):	21 x 12.6 x 2.1

DIMENSIONS (METRIC) (WXHxD)

Packaging (mm):	622 x 520 x 144
Physical (mm):	534 x 381.8~511.8 x 233
Physical Without Stand (mm):	534 x 321 x 54

GENERAL

Regulations:	RoHS, WEEE
PACKAGE CONTENTS:	VG2409-MHU x1, 3-pin Mickey Mouse Plug (IEC C5) x1, HDMI Cable (v1.4; Male-Male) x1, USB Type-C Cable (Male-Male) x1, AC/DC Adapter x1, Quick Start Guide x1
Recycle/Disposal:	Please dispose of in accordance with local, state or federal laws.
Warranty:	*Warranty offered may differ from market to market