

# MICRON MB2

## INLINE QUICK-CHANGE FILTRATION SYSTEM

### General Information

The MB2 is a point-of-use inline water filtration system designed for convenience and versatility. It transforms your standard faucet into a source of clean, refreshing water, delivering high-flow filtration without the need for a separate tap. Perfect for both residential and commercial use, the MB2 maintains a sleek, modern look while ensuring exceptional water quality.

Equipped with a 5 micron Sediment Filter, the MB2 captures fine particles such as dirt, sand, and rust, keeping your water clear and free from impurities. Its Granular Activated Carbon Filter effectively reduces chlorine, volatile organic compounds (VOCs), and other harmful chemicals, improving both taste and safety.

Designed for effortless maintenance, the MB2 features a quick-change system, allowing for seamless cartridge replacements with minimal hassle. Whether for homes, restaurants, offices, or other commercial settings, the MB2 is the ultimate solution for efficient, reliable, and convenient water filtration.

**Designed for mains water.**



### Features and Benefits

- Point of use Inline Water Filtration System designed for convenient and versatility
- Features dual filtration with a 5 micron PP sediment filter and a Granular Activated Carbon Filter
- Removes sediment, chlorine, volatile organic compounds (VOCs), unpleasant tastes and odours
- Quick-change filter replacement
- Slimline design and high flow rate capacity of 2-12L allows for versatility for both residential and commercial uses

#### Cartridge Replacement and Timeframe Suggestions


MB-05 5 micron PP Sediment Filter cartridge to be replaced every 3 - 6 months.

MB-33 Granular Activated Carbon Filter cartridge to be replaced every 6 - 12 months.



# MICRON MB2

## INLINE QUICK-CHANGE FILTRATION SYSTEM

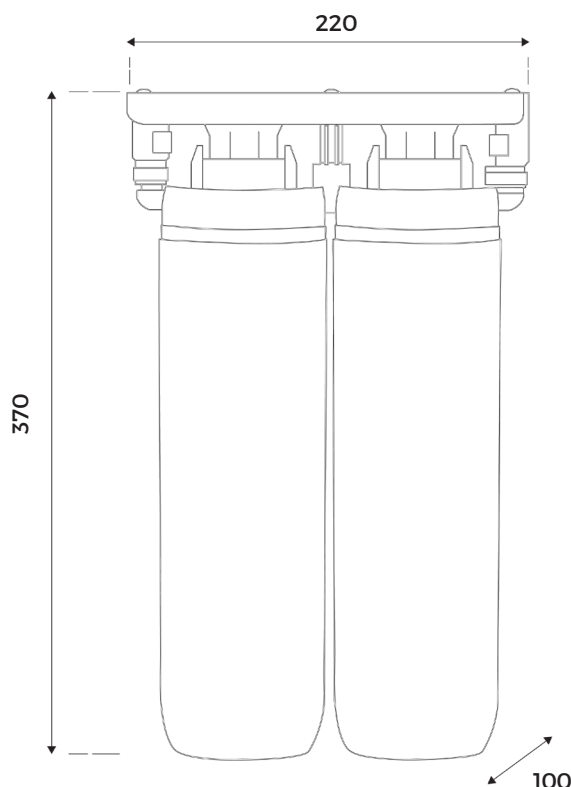

Measurements in millimetres

### MB2 Specifications

Model	MB2
Product Description	Twin Inline Water Filter 1st stage: 5 micron PP Sediment Filter (Model: MB-05) 2nd stage: Granular Activated Carbon Filter (Model: MB-33)
Filtration Capacity	Removes dirt, sand, silt, rust and fine particles to nominal size Reduces chlorine, VOCs, chemicals, odour and unpleasant taste
Flow Rate	2 - 12L/min
Micron Rating	5 micron*
Min/Max Pressure	100 - 550 kPa
Min/Max Temperature	4 - 42°C (must not freeze / cold water only)
Connection	Standard size: 3/8" BSP (10mm)
Mounting Options	Vertical Only
Cartridge Size	2.5" x 10" Quick-Change
Compatible Filter Cartridges	MB Quick-Change Filter Series
Dimensions	370 mm (H) x 220 mm (L) x 100 mm (W)
Certification	WaterMark
Warranty	3 Years <sup>^</sup>

<sup>^</sup> 3 year warranty covering parts only, excluding cartridges. Use only genuine Micron Water Filters cartridges. Filter replacement timeframes are guidelines only and may vary with water quality and usage.

\* Micron rating is nominal.