



958 Turbo / T3 Touareg Intercooler Relocation Bracket Install

The first step is top open the bonnet and remove the four screws securing the top of the grille using a Torx bit.



Then gently ease the grill forwards so you can look down and see the plastic clips that run along the bottom of the grille so you can see how they attach; I recommend spraying some silicone down onto the clips to assit in prising them out.







This photo shows the ends of the clips protruding through the bumper cover. To release them you need to insert a wedge tool under the grille into a tiny slot under each clip, ideally if you had enough of the wedge tools you could put one in each and the grille would pull out forwards in one go, but practically I don't so start at one end and pull the end of the grille whilst working your way along one clip at a time until it comes away.









Now remove the four more torx screws along the edge of the bumper cover.



Next you need to remove the front sound insulation from under the car. This is held in place by 10 T30 torx screws/ 10mm bolts.









Now remove the screws along the bottom of the bumper cover, 3 larger ones across the center and 3 smaller ones at each side.









-Next remove the factory bracket cut bracket that was mounted there previously with a cutoff wheel or saw. install new bracket with provided hardware.


(Some models have bolts here already)








Loosen the upper mounting bolts to the intercooler and then remove the bolts one by one and remove the metal support washers behind the hardware. This will allow for the intercooler to swing forward.

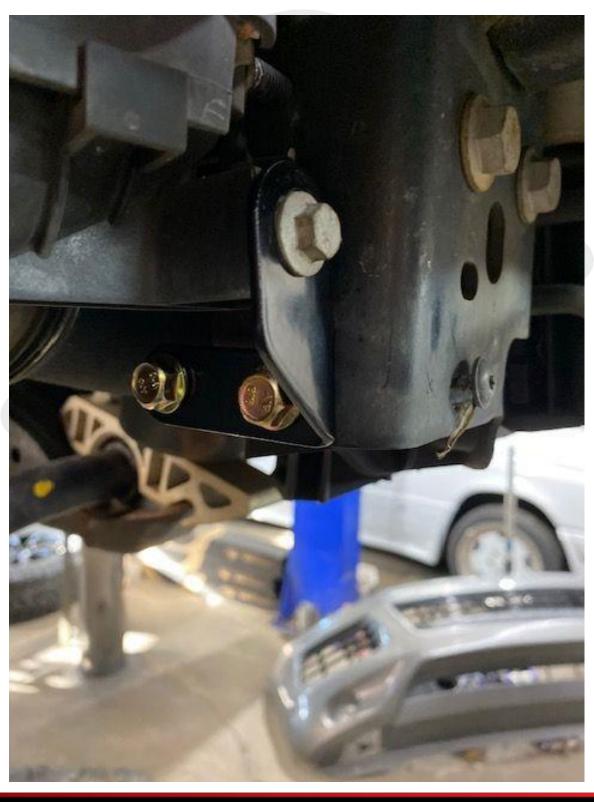



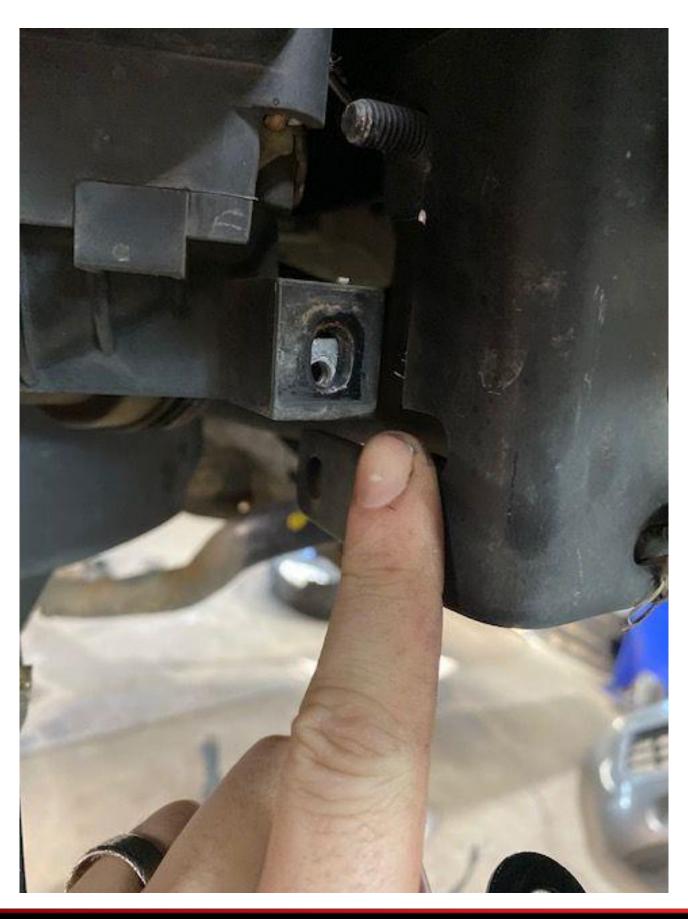









- -Once brackets are installed using a razor blade cut the flimsy part on the front side of the intercooler shroud off. This will be enough to clear the front bumper.
- -Reinstall front bumper

IF YOU HAVE ANY QUESTIONS, COMMENTS, OR CONCERNS RELATED TO YOUR PRODUCT
PLEASE CONTACT US!