Vector Frame Lightbox Square 04

Vector Frame fabric light boxes feature durable 100mm aluminum extrusion frames, push-fit back-lit fabric graphics and LED top and bottom lighting. Single and double-sided graphic options are available. LED lights come adhered to the frame, making set-up as simple as assembling the frame, applying the push-fit graphics and plugging in the electrical cord!
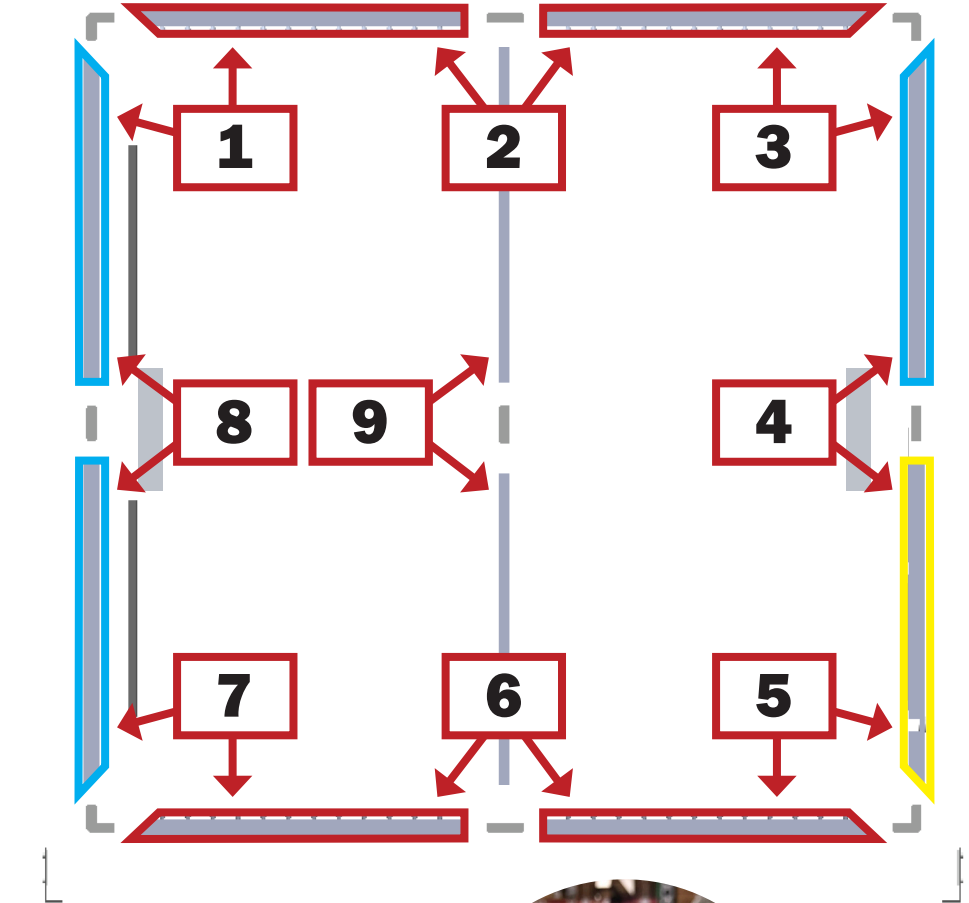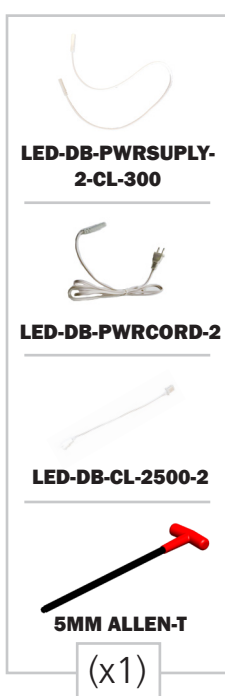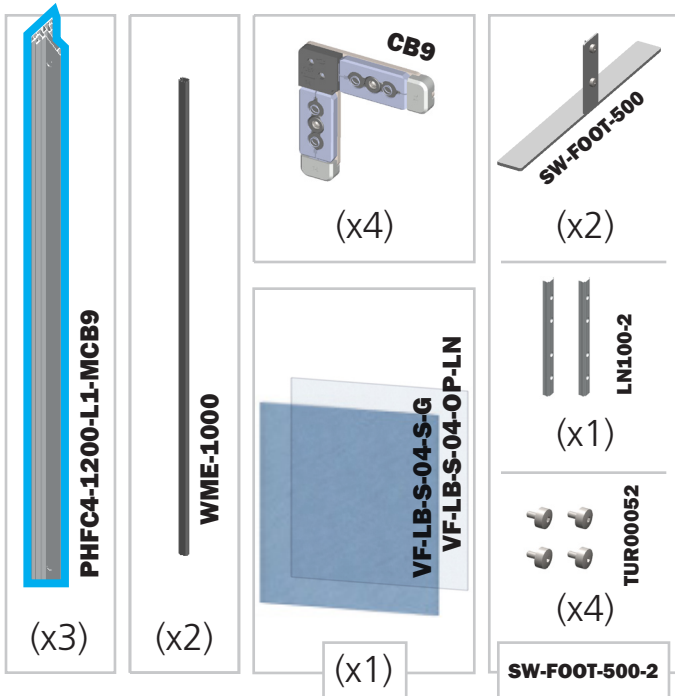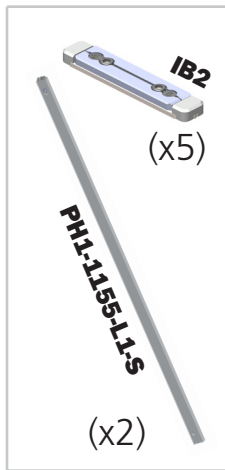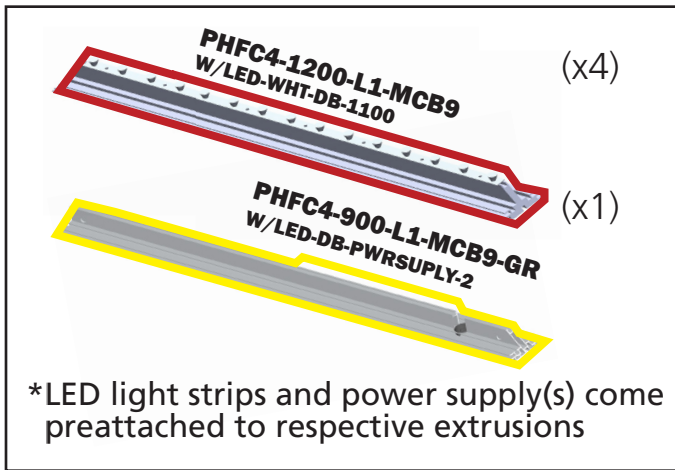

features and benefits:

- 100mm (4") silver extrusion frame
- LED lighting top & bottom
- Single or double-sided push-fit fabric graphics
- Easy assembly

- Comes packaged with one wheeled molded case for transport and storage
- Lifetime hardware warranty against manufacturer defects
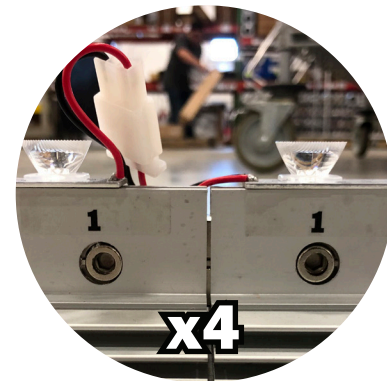
dimensions:

Hardware	Graphic
Assembled unit: 95.35"w x 94.74"h x 19.7"d 2422mm(w) x 2407mm(h) x 500mm(d) Approximate weight with case: 89 lbs / 41 kgs	Refer to related graphic template for more information. Visit: https://www.tradeshowplus.com

Shipping	additional information:
Packing case(s): 1 OCH Shipping dimensions: 50"l x 29"h x 12"d 1270mm(l) x 737mm(h) x 305mm(d) Approximate total shipping weight (includes cases & graphics): 74 lbs / 42 kgs	Graphic material: Backlit Intensity push-fit fabric graphic When included in a larger kit, a different packaging solution will be listed to accommodate all contents of the kit. Individual packaging no longer provided.

This product may include the following materials for recycle:
aluminum, select wood, fabric, cardboard, paper, steel, and plastics.

1 person assembly recommended:

*Not to scale

PHFC4-1200-L1-MCB9
W/LED-WHT-DB-1100 (x4)

PHFC4-900-L1-MCB9-GR
W/LED-DB-PWRSUPLY-2 (x1)

*LED light strips and power supply(s) come preattached to respective extrusions

IB2 (x5)

PH1-1155-L1-S (x2)

PHFC4-1200-L1-MCB9 (x3)

WME-1000 (x2)

CB9 (x4)

SW-FOOT-500 (x2)

VF-LB-S-04-S-G
VF-LB-S-04-OP-LN (x1)

LN100-2 (x1)

TUR00052 (x4)

SW-FOOT-500-2

LED-DB-PWRSUPLY-2-CL-300

LED-DB-PWRCORD-2

LED-DB-CL-2500-2

5MM ALLEN-T (x1)

AF16-300-SIDE (x2)

Back View

x4

*Not reflective of final connection

CB9

AF16

CB9

IB2

CB9

IB2

IB2

IB2

AF16

AF16

IB2

IB2

CB9

CB9
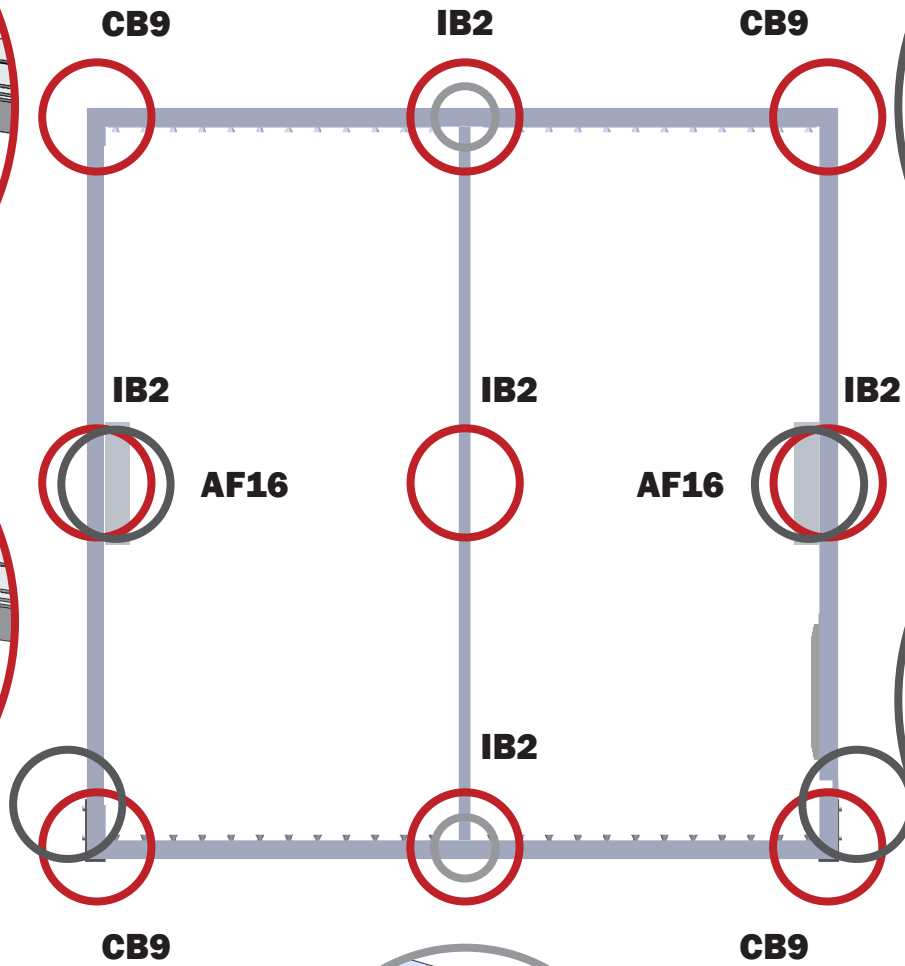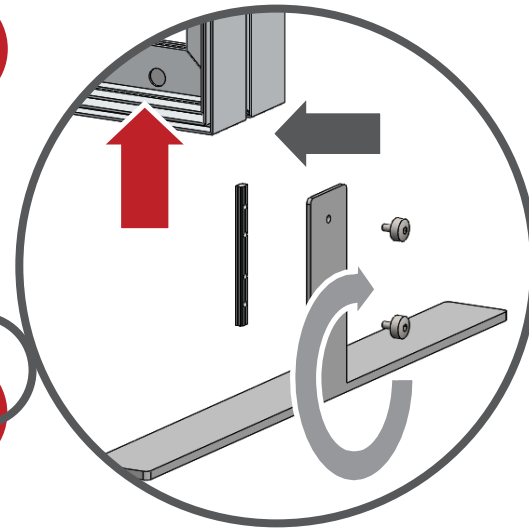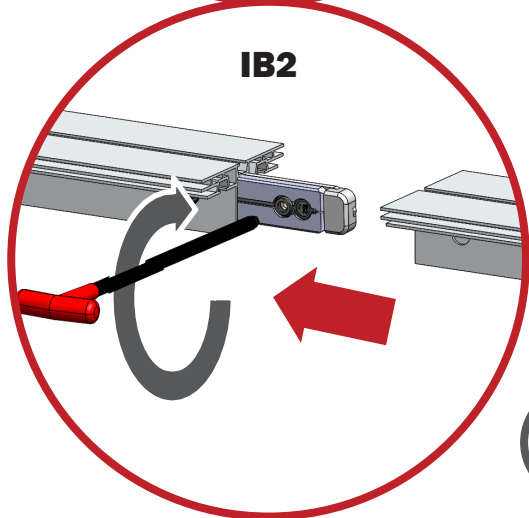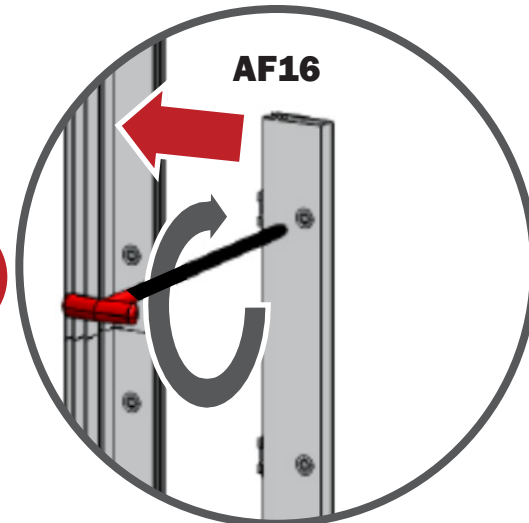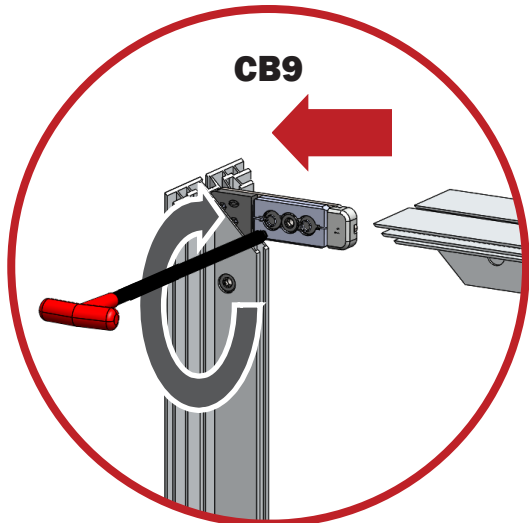
*CB9 & IB2 connection
are consistent

LED-DB-CL-
2500-2

x4

*Not reflective of
final connection
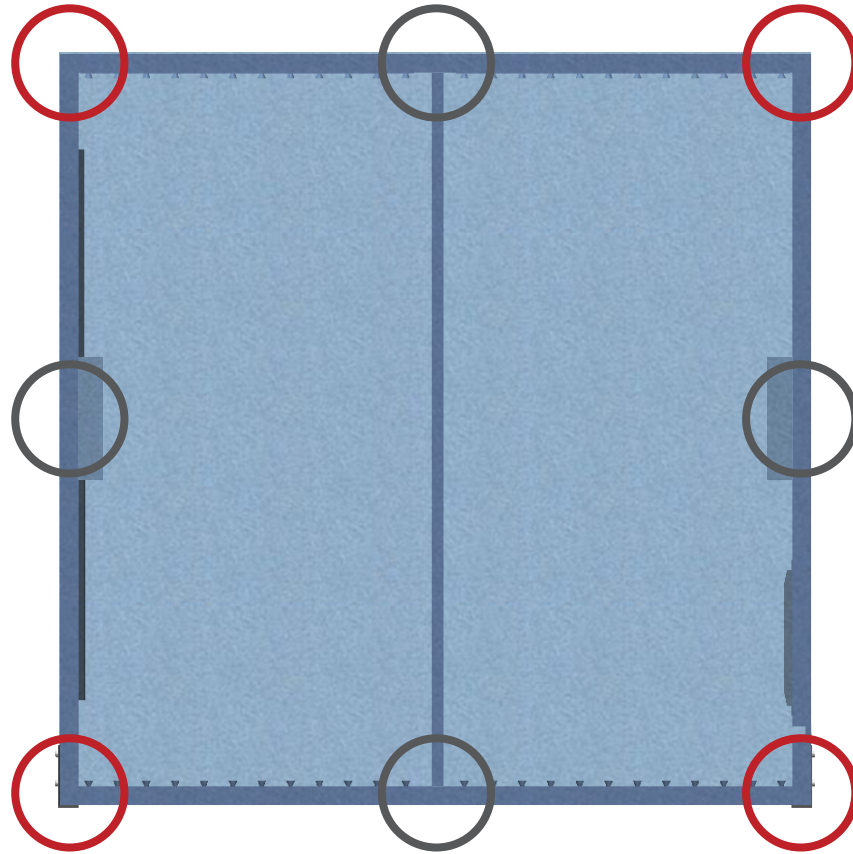
LED-DB-PWRSUPLY-
2-CL-300

x4
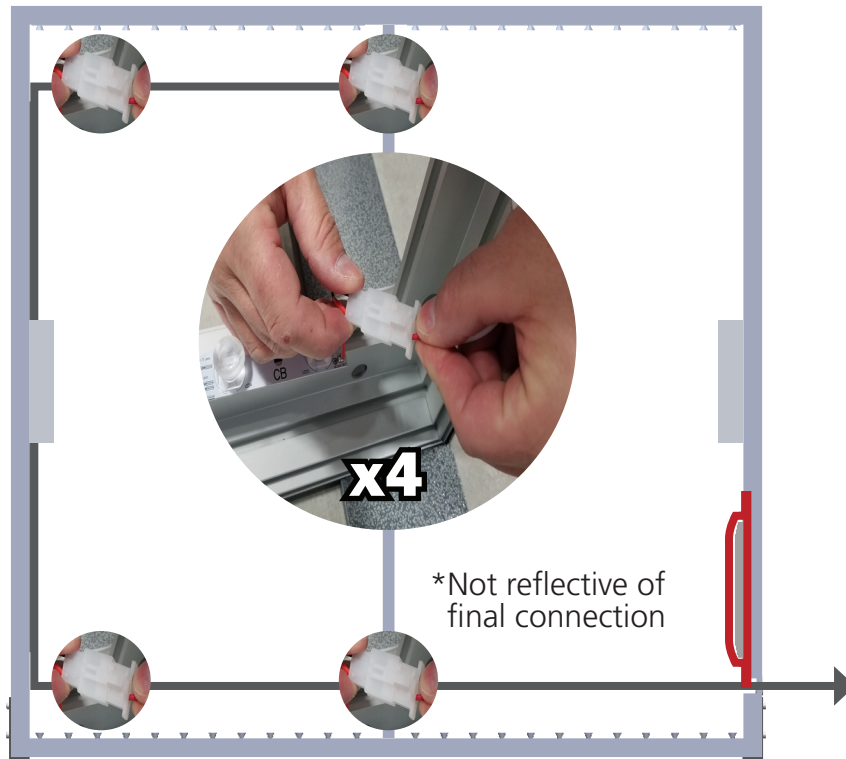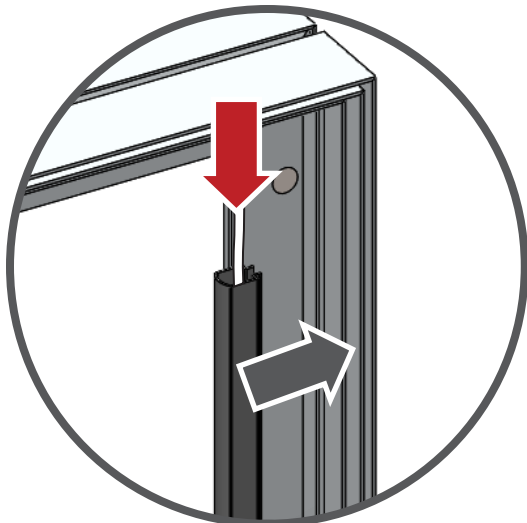
Fit graphic into corners,
then "tap" into rest
of frame channel.

"Sliding down" graphic
is not recommended
for best installation.

Repeat for backer.

Backer
2nd channel

Graphic
1st channel