
LIFT MASTER BOOM, TELESCOPING ECONOMY BOOM - LM-EBT-8-36

APPROX WEIGHT: 639.34 lbs.

*** ANY ADDITIONS, DELETIONS, OR OMISSIONS MUST BE CORRECTED ON THIS DRAWING AS THIS DRAWING WILL BE CONSIDERED ALL INCLUSIVE ***
ALL GRAPHICS PROVIDED ARE FOR REFERENCE ONLY. IF CERTAIN DIMENSIONS ARE CRITICAL PLEASE VERIFY THOSE DIMENSIONS WITH YOUR SALESPERSON

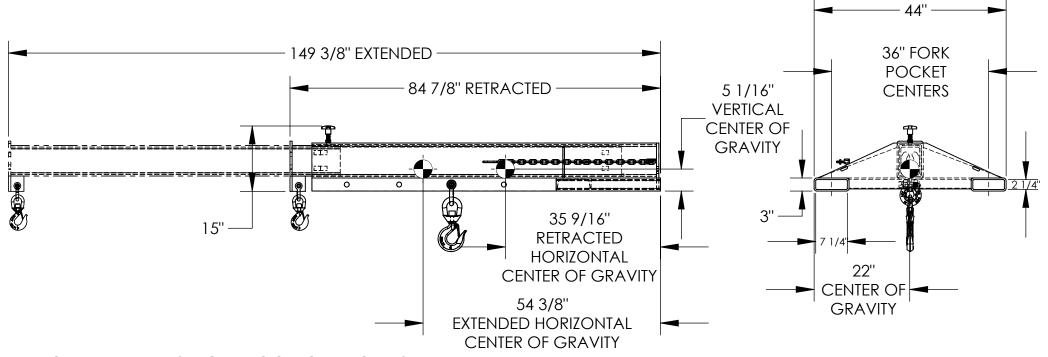

*--MAXIMUM SINGLE HOOK CAPACITIES

DISTANCE	36"	48"	60"	72"	84"	96"	108"	120"	132"	144"
CAPACITY	8000	6650	6000	5300	4650	4000	3500	3000	2600	2200

STANDARD FEATURES

MODEL NUMBER IS LM-EBT-8-36
CAPACITY IS 8,000 LBS.
OVERALL WIDTH IS 44"
FORK POCKET CENTERS IS 36"
OVERALL LENGTH (RETRACTED) IS 84 7/8"
OVERALL LENGTH (EXTENDED) IS 149 3/8"
OVERALL HEIGHT IS 15"
USABLE FORK POCKET IS 2 1/4" X 7 1/4"
36" MINIMUM HOOK POINT

36" MINIMUM HOOK POINT
144" MAXIMUM HOOK POINT
FRAME DURABLE LIQUID PAINT BLUE FINISH
BOOM DURABLE LIQUID PAINT YELLOW FINISH

SPECIAL FEATURES

NONE

APPROX. WEIGHT / LOST LOAD = 639.34

MINIMUM EFFECTIVE THICKNESS = LESS THAN 1"

NEVER EXCEED LOAD CENTER

RATING PER FORKTRUCK

MANUFACTURERS GUIDELINES.

DO NOT USE THIS FORK TRUCK

ATTACHMENT IF LOAD WILL EXCEED

FORK TRUCK MANUFACTURER'S

LOAD CENTER RATING

DIMENSION TOLERANCE ± 1/4"

I, THE UNDERSIGNED, AGREE THAT THE PRODUCT AS REPRESENTED SATISFIES DESIGN AND DIMENSION REQUIREMENTS. I ALSO ACKNOWLEDGE MY DUTY TO Ρ CONFIRM PRODUCT AND INSTALLATION COMPLIANCE WITH ALL APPLICABLE FEDERAL, STATE P AND LOCAL REGULATIONS AND STANDARDS. R UNITS REQUIRING APPROVAL DRAWINGS OR 0 MODIFIED ARE NON-RETURNABLE [] As drawn [] As marked Signed: Date: Printed Name: LEAD TIME WILL START UPON RECEIPT OF SIGNED APPROVAL DRAWING DISTRIBUTOR'S NAME: W.O.# X VESTIL MANUFACTURING SALES: X DATE: 7/30/2015 **B.NOTHNAGEL** SCALE: 1:18 FILE NAME: REFERENCE:

QUOTE #

08-007-292

Quoted lead time: $_{
m Y}$