
## ADJUSTABLE SPREADER BEAM - SBM-40

APPROX WEIGHT: 133.01 lbs.

DOES NOT INCLUDE WEIGHT OF POWER OR PACKAGING!!!

\*\*\* ANY ADDITIONS, DELETIONS, OR OMISSIONS MUST BE CORRECTED ON THIS DRAWING AS THIS DRAWING WILL BE CONSIDERED ALL INCLUSIVE \*\*\*
ALL GRAPHICS PROVIDED ARE FOR REFERENCE ONLY. IF CERTAIN DIMENSIONS ARE CRITICAL PLEASE VERIFY THOSE DIMENSIONS WITH YOUR SALESPERSON

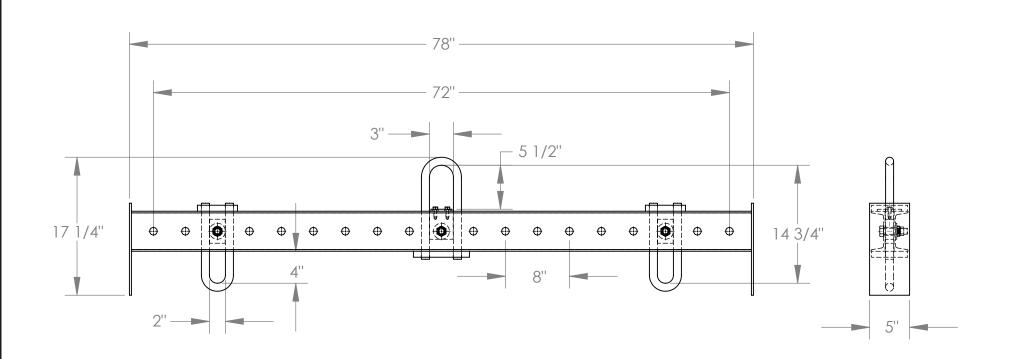

#### STANDARD FEATURES

MODEL NUMBER IS SBM-40 OVERALL WIDTH IS 5" OVERALL HEIGHT IS 17 1/4" OVERALL LENGTH IS 78" USABLE UPPER BAIL IS 3" x 5 1/2" USABLE LOWER BAIL IS 2" x 4" MINIMUM SPREAD IS 8" MAXIMUM SPREAD IS 72" CAPACITY IS 4,000 LBS

#### **SPECIAL FEATURES**

NONE

# DIMENSION TOLERANCE ± 1/4" I, THE UNDERSIGNED, AGREE THAT THE PRODUCT AS REPRESENTED SATISFIES DESIGN AND DIMENSION REQUIREMENTS. I ALSO ACKNOWLEDGE MY DUTY TO

CONFIRM PRODUCT AND INSTALLATION
COMPLIANCE WITH ALL APPLICABLE FEDERAL, STATE
AND LOCAL REGULATIONS AND STANDARDS.

### ANY MODIFIED UNITS ARE NON-RETURNABLE

[ ] As drawn [ ] As marked Signed: Date:

Printed Name:\_\_

R

0

Α

LEAD TIME WILL START UPON RECEIPT OF SIGNED APPROVAL DRAWING

		LEAD TIME WILL CHART OF CIVILED AT THE VALUE OF CHARTING			
FOR INTERNAL USE ONLY		DISTRIBUTOR'S NAME:			P.O.# <b>X</b>
PROJECT SIGN OFF		\ /COTU		W.O.# ,,	
SALES		DD A VAIN DV	-		X
ENG.		DRAWN BY: M.BEIER		5/00	SALES: X
FAB.		reference: X		CALE: 1:12	
POWER		Quoted lead time: $\chi$	QUOTE #		08-007-044