


TECHNICAL SPECIFICATIONS

SRD Galvanized Cable with Small Hook. Variable Lengths.

15' or 20' retractable galvanized cable, swivel top composite housing, 3/4" load indicator hook, 1/2" carabiner with tagline included. Blue housing. Meets or exceeds ANSI Z359.14-2014 Class B.

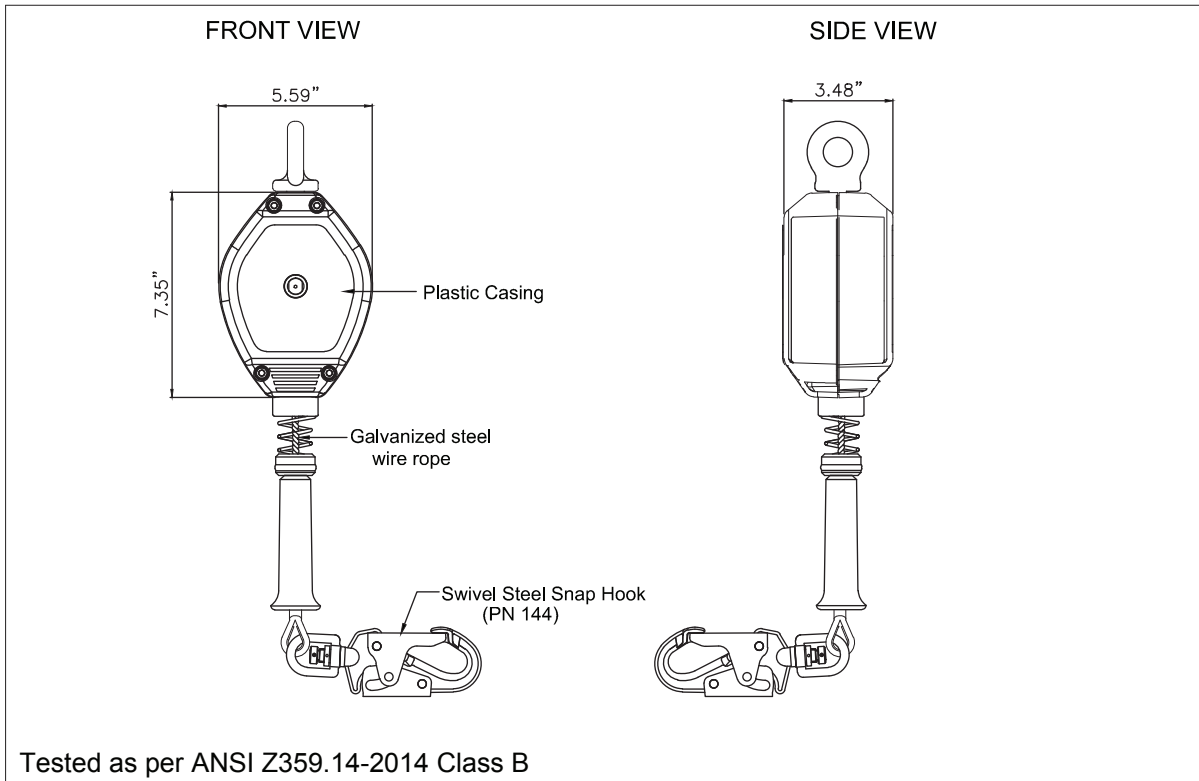

PHYSICAL PARAMETERS:

- Composite housing.
- Robust & durable plastic casing.
- Has swivel anchorage eye at anchorage end. Swivel steel snap hook with load indicator at attachment end (PN 144 as per ANSI Z359.12-2009; gate strength 3600 lbs.).
- Galvanized steel wire rope (option of having S.S. wire rope available).

LENGTH: SRL511311: 15' | SRL611311: 20'

CABLE: Material: Galvanized steel wire rope diameter of 3/16"
 Minimum Breaking Strength: 3300 lbs.

Part #	Length
SRL511311	15'
SRL611311	20'

VITAL TEST COMPLIANCE:

Static Strength: 3000 lbs. for 1 minute.
 Dynamic Strength: 300 lbs. mass subjected to a 4' free fall. SRL lock and remain lock until released.
 Dynamic Performance: 282 lbs. mass subjected to a zero free fall with extension of 36" lifeline. Braking force less than 1800 lbs. Average braking force less than 900 lbs. and arrest distance less than 54".

WEIGHT: SRL511311: 8.24 lbs. ± 0.11 lbs. | SRL611311: 8.54 lbs. ± 0.11 lbs.