


**6036024**

**SteelGrip® Temporary Cable HLL System and Stanchions with 24" beam clamps**

**Features :**

- Complete 60' Single-span Temporary Cable HLL System
- Includes two I-beam stanchions with 4" to 24" clamping range.
- 3/8" galvanized steel cable with one-end terminated and thimble
- Features 1 stainless steel coil energy absorber and 2 connecting carabiners
- In-line tension indicator included with 2 galvanized steel shackles
- System also includes wire rope clips and tensioning turnbuckle
- Cable HLL System meets OSHA 1926.502 and 1910.140 regulations

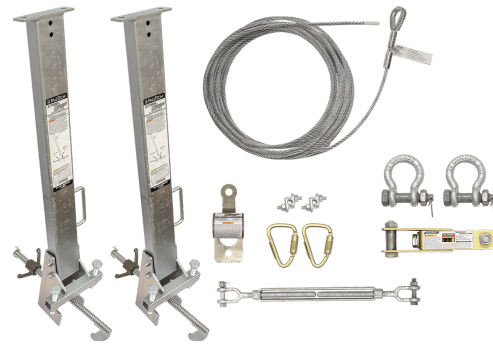

Material Specifications	
<b>Cable</b>	3/8" galvanized steel; 5,000 lb min. static strength
<b>Stanchions</b>	Plated carbon steel post, base and clamp; 8,000 lb min. static strength
<b>Carabiners</b>	Plated alloy steel; 5,000 lb min. static strength with 3,600 lb gate strength

Performance Specifications	
<b>Static Strength</b>	5,000 lb min.
<b>OSHA User Capacity</b>	310 lb max. per user; 2 users max. per single span

Compliant With:	
<b>Cable</b>	HLL System meets OSHA 1926.502 and 1910.140 regulations

Sizes & Part Numbers				
6033024 - 30'	6036024 - 60'	6038024 - 80'	60310024 - 100'	

