


TECHNICAL SPECIFICATIONS

Lanyard 6 ft. Internal Shock, Rebar Hooks, Double Leg.

6 ft. double leg lanyard, non-stretch, internal shock absorber, 2-1/4" rebar hooks. Meets or exceeds ANSI Z359.13-2013

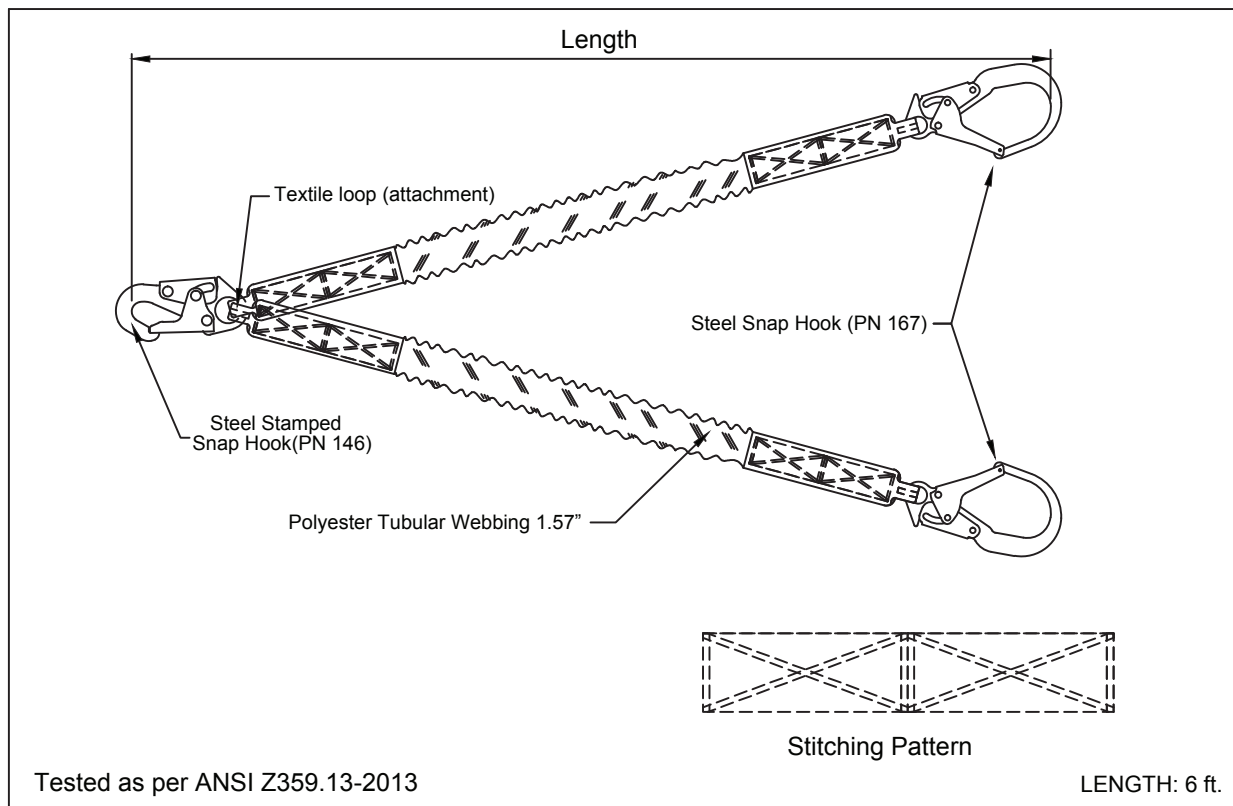

DESIGN: Y shaped 1.57 in. wide polyester tubular webbing incorporated with energy absorbing (6 ft.) polyester webbing.

WEBBING: Material: Polyester | Width: 1.57 in. \pm 0.04 in. | Breaking Strength: 6000 lbs. (Min)

STITCHING THREAD: Material: High-tenacity polyester

METAL COMPONENTS: Material: Alloy steel | Plating: Zinc plated | Finish: Shot blasted | Breaking Strength: 5000 lbs.

VITAL TEST COMPLIANCE: Static Strength: 5000 lbs. for 1 minute
 Dynamic Strength: Maximum breaking force does not exceed 1800 lbs. in the line when tested on a free fall from a 6 foot height attached to a test mass of 282 lbs.

WEIGHT: 5.84 lbs. \pm 0.02 lbs.