


TECHNICAL SPECIFICATIONS

SRL Web with Small Hook. Various Sizes.

15' or 20' retractable web, swivel top composite housing, 3/4" load indicator hook, 1/2" carabiner included. Blue housing. Meets or exceeds ANSI Z359.14-2012 Class B.

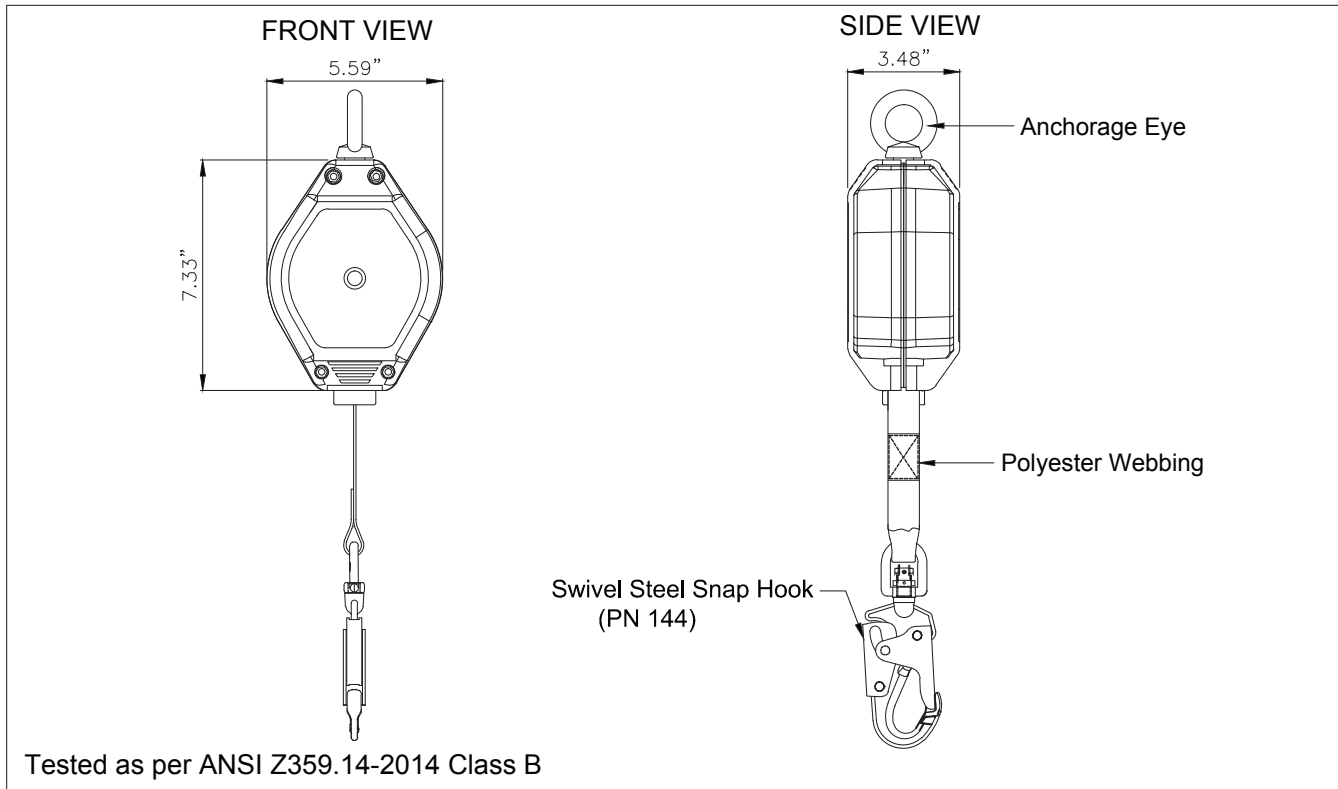

- PHYSICAL PARAMETERS:**
- Composite housing.
 - Robust & durable plastic casing.
 - Has swivel anchorage eye at anchorage end.
 - Swivel steel snap hook with load indicator at attachment end (PN 144 as per ANSI Z359.12-2009; gate strength 3600 lbs.).
 - Polyester Webbing

LENGTH: SRL521311: 15' | SRL621311: 20'

WEBBING: Material: Polyester
 Width: 1"
 Minimum Breaking Strength: 4500 lbs.

VITAL TEST COMPLIANCE:

Static Strength: 3000 lbs. for 1 minute.
 Dynamic Strength: 300 lbs. mass subjected to a 4' free fall. SRL lock and remain lock until released.
 Dynamic Performance: 282 lbs. mass subjected to a zero free fall with extension of 36" lifeline. Braking force less than 1800 lbs. Average braking force less than 900 lbs. and arrest distance less than 54".

WEIGHT: SRL521311: 5.12 lbs. ± 0.02 lbs. | SRL621311: 5.42 lbs. ± 0.02 lbs.

Part #	Length
SRL521311	15'
SRL621311	20'