


# Perla 35

design Ettore Cimini & Walter Monici, 2009

release 2019, December



A suspended light fitting for diffused illumination, made of die-cast aluminium with a diffuser of blown glass, available in 2 sizes and powers. Possibility of cascaded installations since you can electrically connect several fittings to the same power connection. Possibility of vertical and horizontal adjustments by means of ropes and other accessories of simple use.

## Finishing

## Standard

- Polished aluminium  
cod. 8002200

All RAL coating and galvanic finishes available upon request

## Light emission

- Light emission: diffuse
- Light direction: downlight / uplight
- Light source: MAX 150W HAL E27/E26
- Bulb not included

## Electrical Facts



- Power absorption: MAX 150W
- Grid voltage: 100-240V AC/50-60Hz
- Power supply: AC driven
- Dimmability: dimmer compatible (according to installed bulb)
- Energy class: A++ compatible (according to installed bulb)

## Technical data

- Environment: indoor
- Placement: pendant
- Net weight: 4,1 Kg
- Certifications: CE
- Suggested ambient T: 25°C
- Maximum ambient T: 40°C
- Insulation class: I
- Protection class: IP20

Packaging  
cardboard box  
44 x 44 x 43 (cm)  
0,083 m<sup>3</sup>

Gross weight  
5,4 Kg

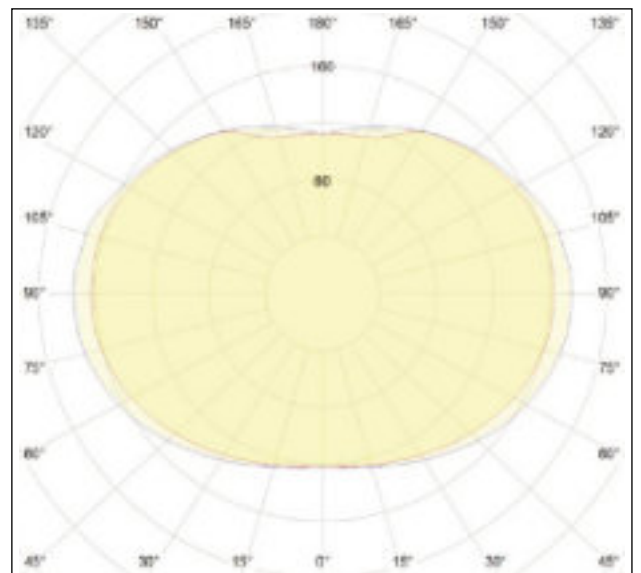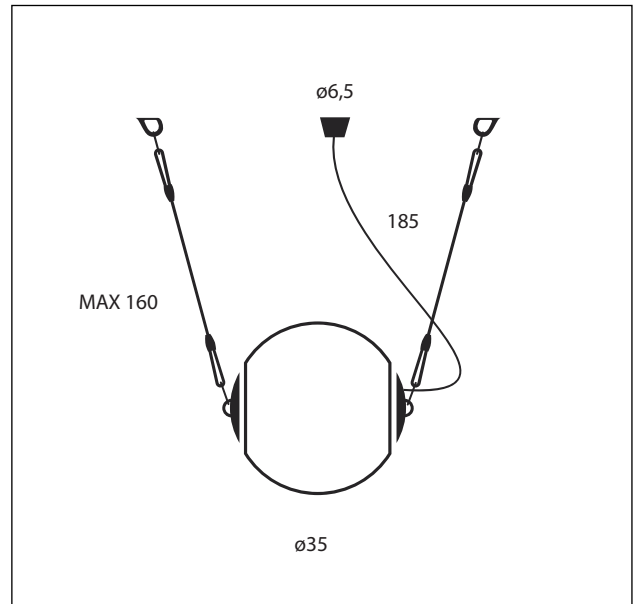

# Perla 28

design Ettore Cimini & Walter Monici, 2009

release 2019, December



A suspended light fitting for diffused illumination, made of die-cast aluminium with a diffuser of blown glass, available in 2 sizes and powers. Possibility of cascaded installations since you can electrically connect several fittings to the same power connection. Possibility of vertical and horizontal adjustments by means of ropes and other accessories of simple use.

## Finishing

### Standard

- Polished aluminium  
cod. 8102200

All RAL coating and galvanic finishes available upon request

## Light emission

- Light emission: diffuse
- Light direction: downlight / uplight
- Light source: MAX 100W HAL E27/E26
- Bulb not included

## Electrical Facts

- Power absorption: MAX 100W
- Grid voltage: 100-240V AC/50-60Hz
- Power supply: AC driven
- Dimmability: dimmer compatible (according to installed bulb)
- Energy class: A++ compatible (according to installed bulb)

## Technical data

- Environment: indoor
- Placement: pendant
- Net weight: 3,2 Kg
- Certifications: CE
- Suggested ambient T: 25°C
- Maximum ambient T: 40°C
- Insulation class: I
- Protection class: IP20

Packaging  
cardboard box  
37 x 37 x 37 (cm)  
0,050 m<sup>3</sup>

Gross weight  
4,1 Kg

