

HOUR
HAND

MINUTE
HAND

SCREW DOWN
CROWN

DATE




AUTOMATIC 3 HANDS WITH DATE

CAHILL MIDSIZE SP-5075

PLEASE READ THE FOLLOWING BEFORE UNSCREWING THE CROWN:

SCREW-DOWN CROWN

Screw-down crowns are used to ensure water resistance. **ALWAYS** be certain that your crown is securely screwed down (Position [0] is secured. Positions [1], [2] and [3] are not secured for water resistance). Do **NOT** unscrew your crown while you are in any environment where moisture is present.

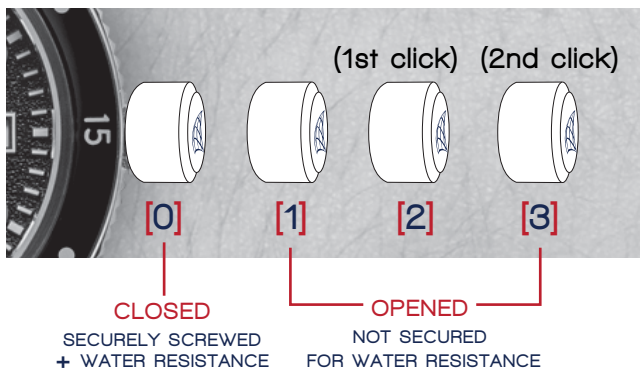


USING THE SCREW-DOWN CROWN

DO NOT PULL THE CROWN UNLESS IT IS UNSCREWED FIRST:



TO UNSCREW: Turn the crown anti-clockwise until it turns freely without tension.

Once the crown is fully unscrewed, it automatically sets itself into position [1]. GENTLY pull the crown out to the other desired positions for watch setting (see specific operating instructions on the following pages).




TO SCREW: Push the crown ALL THE WAY IN (towards the watch) THEN begin to turn clockwise until it is securely screwed down.

NOTE: Failure to SECURELY screw down the crown after setting the watch may affect its water resistance.

BEFORE YOU USE THIS WATCH, IT IS RECOMMENDED THAT YOU MANUALLY WIND THE MAINSPRING TO START IT MOVING.



THIS WATCH IS AN AUTOMATIC WATCH EQUIPPED WITH A MANUAL WINDING MECHANISM.

WINDING THE MAINSPRING



1. Unscrew the crown by turning it anti-clockwise.
2. When it is in position [1], turn the crown clockwise to wind. Wind 15-20 times and it will start to move naturally after shaking slightly.
3. Push the crown in then screw it securely.



* This watch MUST be worn for at least 8 (Eight) hours each day to ensure it is fully wound. An automatic watch will only wind when the watch is on your wrist and your arm moves. Winding the watch by the crown will put power on the spring but not enough to allow the watch to function fully. If your watch stops overnight or loses time it means it is not being fully wound.



HOW TO SET THE TIME

1. Unscrew the crown and pull it out to position **[3]**.
2. Turn the crown clockwise to set the correct time.
3. Push the crown in then screw it securely.

- * Take a.m./p.m. into consideration when setting the hour and minute hands to the desired time.
- * Always be certain that your crown is SECURELY SCREWED; this will prevent moisture from entering in.



HOW TO SET THE DATE

1. Unscrew the crown and pull it out to position **[2]**.
2. Turn the crown anti-clockwise to set the correct date.
3. Push the crown in then screw it securely.

- * Do not set the date between 9:00 P.M. and 4:00 A.M.

WATER RESISTANCE

Note that the water resistance chart serves only as a guide (please refer to the water resistance chart on the next page). Actual water resistance may vary depending on a number of factors including water temperature, water salinity, and use under water.

The water resistance of your timepiece may eventually be compromised over time with general wear and tear and use of your timepiece under adverse conditions.

Always remember to employ the screw down crown if available to maintain the water resistancy of your timepiece. Warranty may be voided if the screw down crown has not been properly employed.

Note that you should never wear your watch in a jacuzzi or steam room where steam may enter the case despite the water tight seals used to protect your watch. This may cause condensation inside your watch which may effect and damage the inner workings of your watch.

***Spinnaker watches, its manufacturer, brand owner or any of its affiliated companies accept no liability for death or injury resulting from use, misuse or failure on the part of this watch.**

WATER RESISTANCE CHART

	30M/ 3ATM	50M/ 5ATM	100M/ 10ATM	150M/ 15ATM	200M/ 20ATM	300M/ 30ATM	500M/ 50ATM	1000M/ 100ATM
SPLASH/ SHOWERING	✓	✓	✓	✓	✓	✓	✓	✓
SWIMMING/ BATHING	✗	✓	✓	✓	✓	✓	✓	✓
SWIMMING/ SNORKELING/ WATER SPORTS	✗	✗	✓	✓	✓	✓	✓	✓
FREE DIVING	✗	✗	✗	✓	✓	✓	✓	✓
SCUBA DIVING	✗	✗	✗	✗	✗	✓	✓	✓
PROFESSIONAL DEEP SEA DIVING	✗	✗	✗	✗	✗	✗	✓	✓

WATER RESISTANCE: 20ATM