

VOLT ⚡ CADDY



VOLT ⚡ CADDY



Scan Me for
the Complete Guide

Quick Start Guide

V2.0

Contact Information:

✉ Support@voltcaddy.com

Spare Parts Inquiry:

✉ Support@voltcaddy.com

WWW.VOLTCADDY.COM

IC

MODEL: PRO-S (HVN:PRO-S)
IC: 28319-PROS

FC

FCC ID: 2A37L-PROS




Designed in Canada

1 FOLDING AND UNFOLDING YOUR CART

UNFOLDING CART

Unfold the upper frame section fully
Lift the main frame from the central hinge until the lock clicks into position

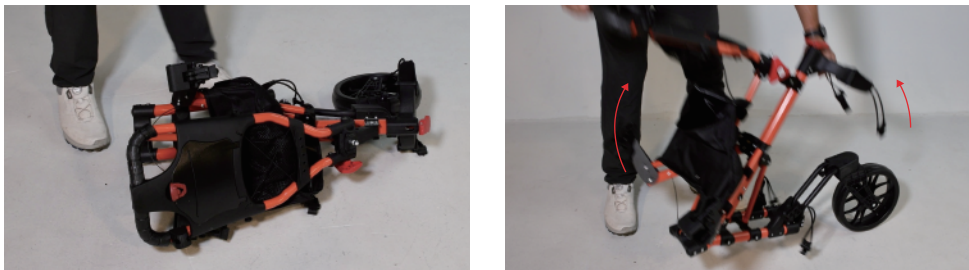


2 PLUGGING THE BATTERY

- Position the battery on the bottom of Motor Unit from opposite side of the Lock Button .
- Pull the Lock Button
- Push the battery handle down to connect the battery



3 EXTEND THE MOTOR UNIT

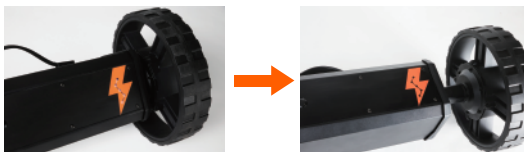

ALWAYS ENSURE THE BATTERY IS SECURELY LOCKED

4 ATTACHING / DETACHING YOUR CART TO THE MOTOR UNIT

- 1 Ensure the cart frame is fully unfolded
- 2 Extend the wheels of the motor unit
- 3 Place the Axle Clamps onto the axle. Make sure the clamps are laying equally on the both sides of axles. Adjust both sides to ensure they are equal distance if necessary
- 4 Lock the axles by tightening the Clamps. (Reverse these steps to disassemble the unit.)



5 INSTALLING THE ANTI-TIP SUPPORT WHEELS

- 1 Push the button on the Support Wheel
- 2 Insert and link to the Axle Clamps
- 3 Ensure it is Locked to the upper part of the Axle Clamp



6 STARTING YOUR VOLT CADDY

- 1 Push the START Button
- 2 Light Flashing indicates that it is been started
- 3 The batter level is indicated by the number of light
- 4 When the light flashes, it is ready for syncing the Remote Control (around 3 seconds window)



7 PARING THE REMOTE CONTROL



- 1 Turn ON remote controller : Press 2 times
Ensure remote control batteries are inserted. (Battery required AAA).
- 2 Turn ON motor unit
- 3 Hold M+□ , buttons for 3 seconds to pair Remote with Cart.
When the light flashes, it is the window for syncing the Remote Control (around 3 seconds)
- 4 Confirm Indicator Light flashing

