



**DISSENT**   
—OFF-ROAD—

**LC100** ROOF RACK INSTALL  
I N S T R U C T I O N S



Front Fairing (x 1)

Rear Fairing (x 1)

Loadbars (x 6)

Sunroof Loadbar (x 1)

S/R Loadbar Opt. Spacers (x 2)

Driver-Rear Side Skirt (x 1)

Pass-Rear Side Skirt (x 1)

Driver-Front Side Skirt (x 1)

Pass-Front Side Skirt (x 1)

Side Skirt Nutplates (x 2)

Driver-side Rack Feet (x 4)

Passenger Rack Feet (x 4)

Logobadges (x 2)

Hardware kit (x 1)

Front Fairing Weatherstrip (x 1)

Lay out Loadbars on a flat surface in the following order, keeping in mind one of the seven Loadbars differs from the rest as pictured and described, below:

The first Loadbar behind the front fairing is thinner, to accommodate the tilt function of the sun-roof. Note the side of this Loadbar is thinner and does not have slots on its sides as all of the other Loadbars do.



**NOTE:** There is also the option to completely remove Load Bar if desired, by using the included spacers, on-top the first set of Rack Feet, located between the front side-skirt. These Spacers will then occupy the area where the Loadbar would otherwise be installed.



Begin attaching side skirts to the load bars with the included 5/16" x 3/4" bolts at shown locations.



**NOTE:** Refrain from tightening any bolts until the entire Rack is seated on installed Rack Feet

Four Load Bars have pre-determined mounting spots as they attach to the rack feet:



Keep in mind Sunroof Loadbar location towards Front-Fairing:



The remaining 3 can be installed evenly spaced or as determined necessary per your desired function of Roof Rack.

Use the boltholes to continue installation as highlighted on the right.

Install Logo Badge in depicted locations:



Install Side-skirt Nutplates to intersection points of Side-skirt on both sides:



Apply trim to bottom of Front Fairing:



Install Front and Rear Fairings:





Remove Factory Rack


Rack Feet have stamped triangle arrows to indicate mounting direction and location:



**NOTE:** Rack Feet indicate position on the roof from one triangle towards front of roof and four triangles towards the rear



Apply silicone sealant to mounting location and holes on rooftop of vehicle. Ensure to apply silicone to bolt threads.

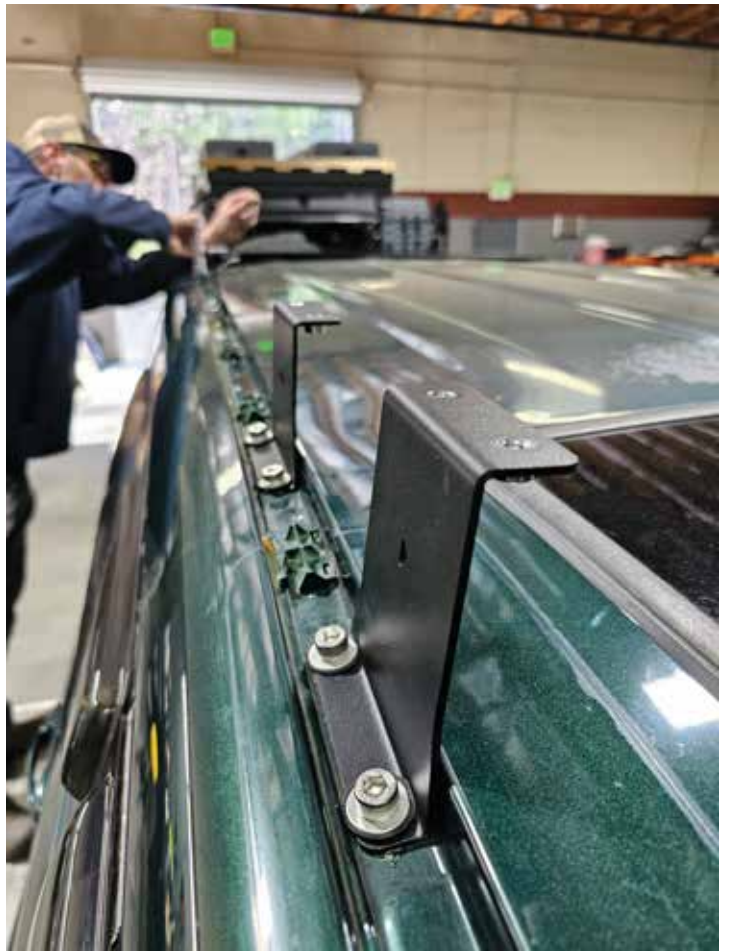

Install Rack Feet in depicted orientation. Using supplied M8 Socket Head Bolts and foam/metal washer, fully tighten until snug.



Next step is best done with 2+ people. Lift rack and gently place on top of vehicle roof on installed Rack Feet.

Shift rack into position so mounting holes of the Roof Rack align with Rack Feet.

Install every bolt loosely into Rack Feet and Check Alignment **before** tightening the bolts.

Tighten remaining bolts on the Roof Rack.





**Accessory Nutplates:** These nut plates can be used on the underside of the load bars to make mounting aftermarket accessories easier.

