

Air Bags



Thank you for choosing HKI AIR SUSPENSION products to control your air suspension.

Our mission is to provide the best experience for you and your vehicle. Our commitment is huge, from development, manufacture, service, sale and warranty.

This manual will provide all important information for the correct and safe use of our products.


However, if you have any difficulties or if you have any questions that are not addressed in this document, please feel free to contact our team.

hki@hkiairsuspension.com

HKIAIR
SUSPENSION

HKI air bags are specially designed and manufactured to meet your needs.

The combination of North American design and quality with the different applications make this product line the best choice for your project!

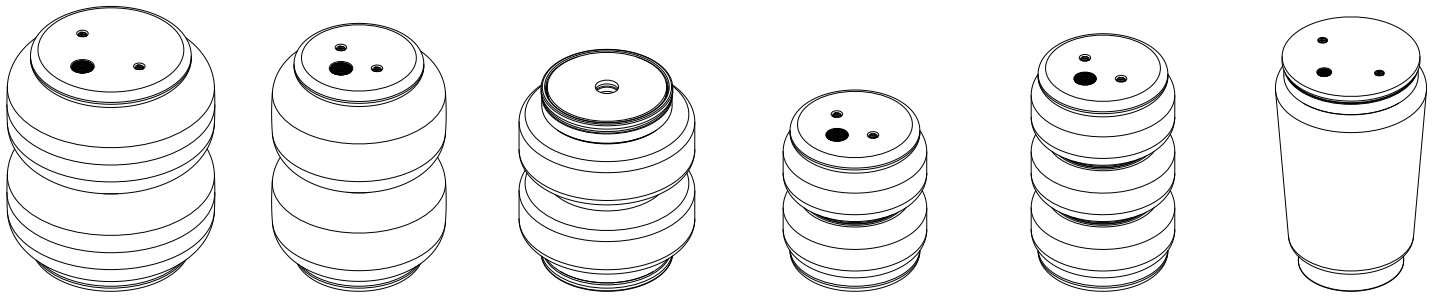

Pneumatic Installation

At the time of pneumatic installation, it is important to verify if the fittings that will be mounted on the product is manufactured in the NPT standard. Always use a thread sealant of your choice so that there is no air leakage.

DO NOT use extreme force when mounting the fitting in the air bag, this damages the threads (*of the bag and the fitting*) increasing (*a lot*) the chances of air leakage.

Maintenance

As an item specially developed for this purpose, the air bag does **NOT** require any maintenance on rubber. We do not recommend the use of any type of degreaser or any other product for cleaning or protection purposes.

Some products can dry out the rubber and shorten its life.

When installing the product in the vehicle, make sure that the air bag rubber does not touch any fixed or mobile part of the vehicle, do this by simulating the various heights that the vehicle can run.

Any contact with the air bag's rubber can cause premature wear of the bag.



ALWAYS use a car lift or stand when doing any service on the air bags.
Make sure the pneumatic system is depressurized before servicing.

