

NOTE:

Pre Finished teak panels do not require additional coating unless used in wet areas (bathrooms), where they will require sealing with a marine grade sealer / varnish to avoid mould developing.

If pre finished panels are used externally where they will be exposed to excessive sunlight, we recommend applying another 2 coats of Teak Exterior Oil.



RAW panels must be sealed or stained, prior to, or after installation.

Stand back and admire your finished wall or ceiling.

For Further information please call 1300 308 043 or your local Bamboo Building Products Agent.



FREMANTLE & ASCOT PANEL INSTALLATION GUIDE



TOOLS YOU WILL NEED:




DROP SAW



BRAD (FINISHING) GUN



CIRCULAR SAW



38MM / 15 GAUGE GALVANISED OR STAINLESS BRAD NAILS



SPIRIT LEVEL



ADHESIVE



STUD FINDER



CALKING GUN



PENCIL



PUNCH



HAMMER

Step 1: Prepare the wall

Dry Wall (Gyprock)

Use stud finder to locate stud and mark with a pencil where the studs are.




Block Wall

Batten the wall out with 42 x 11 pine or metal battens 450mm apart.



Concrete wall or ceiling

Batten the wall out with 42 x 11 pine or metal battens.

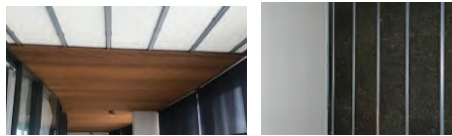

Stud Wall

Build a stud wall with 70 or 90 x 35 mm Pine Studs 450mm apart.



Step 2: Attach the first panel

Apply Adhesive to the wall or stud



Line up the first board making sure it is vertical, using a spirit level

Using the Brad Gun, shoot a brad nail into the valley on an angle, through the panel into the wall.


Step 3: Attach corresponding panels

Slide the tongue of the next and corresponding boards into each board after applying adhesive behind it and shooting a brad nail on an angle into the valey of the board.



Repeat the above process until the wall or ceiling is complete.

Using a Centre Punch and Hammer – punch in any brad nails that may not have sunken into the Ascot or Fremantle Panels



Step 4: Ripping a Board – making a narrower board

Should you need a narrower width to finish, simply use the saw guide on your circular saw, set at the desired width and cut (rip) a board down. Apply the final board as per Step 3.



Step 5: Clean up

Clean any excess adhesive with a rag (in water or solvent)

Wipe completed wall down with a damp rag, timber furniture cleaner or oil refresher soap.

