

TEST REPORT

300-VELA, Hood-Lab

Report No.:

300-Hood-Lab-19-05



**DANISH
TECHNOLOGICAL
INSTITUTE**

Teknologiparken
Kongsvang Allé 29
DK-8000 Aarhus C
Tlf.: +45 7220 2000
<http://dti.dk>

Page: 1 of 9
Init: BBJN/ASOV
Order no: 858171

Customer: Company: Trepol
Address: Herluf Trolles Vej 20 B
City: DK-5220 Odense SØ

Component: Range hood: Not fully automatic domestic range hood, with built in fan
Manufacturer: Trepol
Type: Conus
Model: 82e
Serial no.: -
Exhaust diameter: 160 mm

Selection: The component have been selected and provided by the client.
Component received: February 2019
Component tested: May - July 2019

Procedure: DS/EN 61591:1997 Household range hoods - Methods for measuring performance
ISO 5801:2017 Fans - Performance testing using standardized airways
DS/EN 60704-2-13:2017 Household and similar electrical appliances - Test code for determination of airborne acoustical noise
Ecodesign regulation 65/2014
Ecodesign regulation 66/2014

Result of test:	EEI class	FDE class	LE class	GFE class	L _{WA}	O _f
CV1000	A+	A			67 dB	
CV1300	A+	A	B	B	73 dB	98 %

Remarks: Any remarks can be found on page 3.

Storage: The component will be stored according to the general terms and conditions of DTI after which it is disposed of.

Terms: The test has been performed according to the general terms and conditions of Danish Technological Institute.

The results from DTI's work in this report, i.e. analyses, assessments and instructions may only be used or reported in their entirety. The customer may not mention or refer to DTI or DTI's employees for advertising or marketing purposes unless DTI has granted its written consent in each case.

Signature: This document has been digitally signed by:

Asger S. Søvsø
Head of Hood-Lab

&

Birger B. Jessen
Head of Noise-Lab

Division/Centre: Danish Technological Institute
Energy & Climate
Hood-Lab.: Taastrup



TEST REPORT

Component: Trepol - Conus - 82e Page: 2 of 9
Report no.: 300-Hood-Lab-19-05 Initials: BBJN/ASOV
Order no.: 858171 Date: July 3, 2019

Objective:

The objective of this report is to document the energy label, volumetric airflow, efficiency of the lightning system, grease filtration and odour extraction of a range hood, measured and calculated following conditions as stated in DS/EN 61591:1997 incl A1, A2, A11 & A12 (Clause 11, 12, 13, 14 & 16.Z1), ISO 5801:2017, DS/EN 60704-2-13:2017, Ecodesign regulation 65/2014 and Ecodesign regulation 66/2014

Primary measurement equipment used during all tests:

Parameter	Equipment	QA Equip. no.:
Power	Yokogawa WT310-C1-F/C7	173006
Pressure	ABB 2600T	138577
	ABB 2600T	138578
	ABB 2600T	138579
Temperature & humidity	Vaisala HMI38	171877
	Multi instrument TSI 9565-P	79650
Barometer		2138
Lightning test:	Kimo Lx100	172963
Grease Filter test	Kern ILS 50K-4	165307
Sound Power Level	Reverberation room fulfilling ISO 3741/3743-1.	79737
	Microphones type 4165	79014
	Microphones type 4165	79015
	Microphones type 4165	79016
	Microphones type 4165	79017
	Microphones type 4165	79019
	Microphones type 4165	79020
	1/3-octave analyzer A3050-A-060	77171
Reference sound source BK4204	77179	
Airflow	Elliptical nozzle Ø100 acc. ISO 5801	171928
	Elliptical nozzle Ø165 acc. ISO 5801	174062
Datalogger	Agilent 34970A	148160
MEK detector	Falco	173127

Signature:

Asger S. Søvsvø, M.Sc.
Specialist

Signature co-reader:

Birger B. Jessen, M.Sc.
Senior consultant



TEST REPORT

Component: Trepol - Conus - 82e
Report no.: 300-Hood-Lab-19-05
Order no.: 858171

Page: 3 of 9
Initials: BBJN/ASOV
Date: July 3, 2019

Test Results:

Trepol - Conus - 82e					
No.	Parameter	Symbol	CV1000	CV1300	Unit
1	Energy Efficiency Index	EEI_{hood}	32,9	30,5	
2	Energy Efficiency Class		A+	A+	
3	Annual Energy Consumption	AEC_{hood}	19,0	32,4	kWh/a
4	Time increase factor	f	0,6	0,5	
5	Fluid Dynamic Efficiency	FDE_{hood}	38,6	41,4	%
6	Fluid Dynamic Efficiency class		A	A	
7	Measured air flow rate at best efficiency point	Q_{BEP}	356,2	462,2	m^3/h
8	Measured static pressure at best efficiency point	P_{BEP}	336,0	548,0	Pa
9	Measured electric power input at best efficiency point	W_{BEP}	86,1	169,9	W
10	Average illumination of the lighting system on the hob	E_{middle}	109		lux
11	Nominal power of the lighting system	W_L	4,0		W
12	Lighting Efficiency	LE	27,3		$lux/watt$
13	Lighting Efficiency class		B		
14	Grease Filtering Efficiency	GFE	94,4		%
15	Grease Filtering Efficiency class		B		
16	Measured power consumption off mode	P_o	0,4	0,4	W
17	Measured power consumption in standby mode	P_s	0,4	0,4	W
18a	Sound power level at minimum speed	L_{WA-min}	51	58	dB
18b	Sound power level at maximum speed	L_{WA-max}	67	73	dB
19	Sound power level at boost speed	$L_{WA-boost}$	67	73	dB
20a	Airflow at minimum speed	Q_{min}	308,1	434,2	m^3/h
20b	Airflow at maximum speed	Q_{max}	608,2	788,0	m^3/h
21	Airflow at boost speed	Q_{boost}	626,3	791,0	m^3/h

Remarks

Tested with two different external motors; CV1000 and CV1300.




TEST REPORT

Component: Trepol - Conus - 82e
Report no.: 300-Hood-Lab-19-05
Order no.: 858171


Page: 4 of 9
Initials: BBJN/ASOV
Date: July 3, 2019

Test results - continued:

Volumetric airflow - Boost CV1000

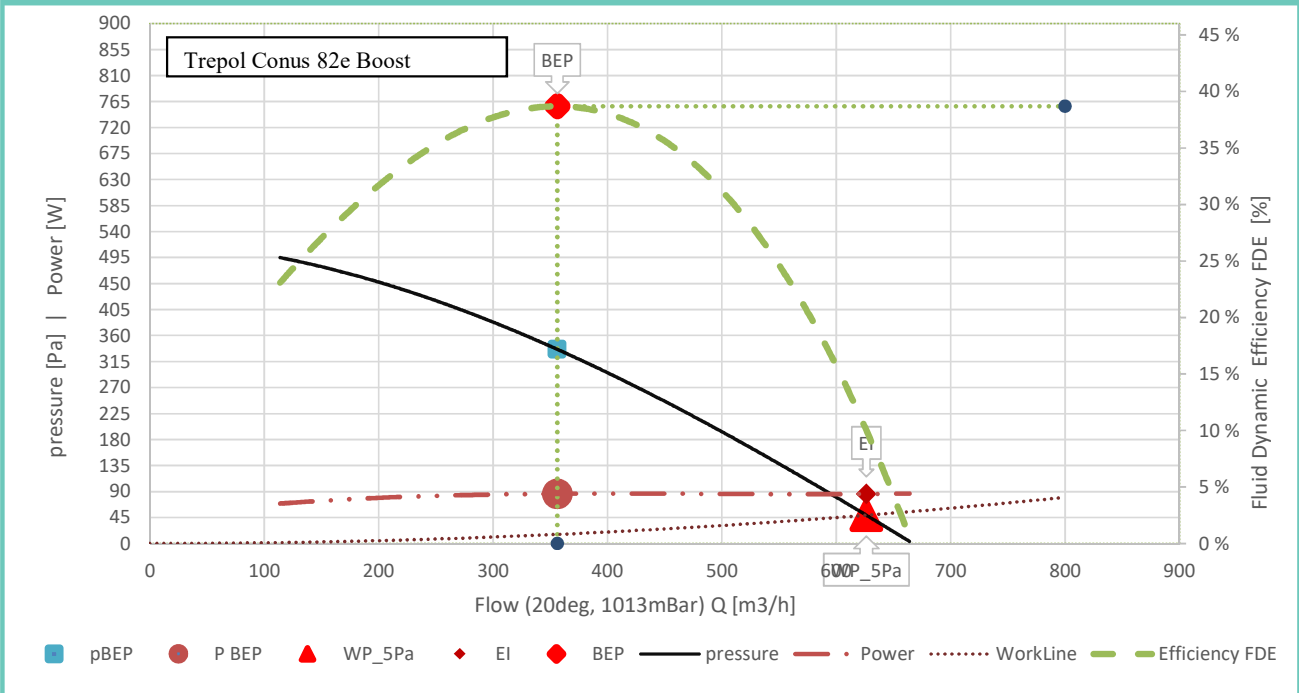

Volumetric airflow - Max CV1000

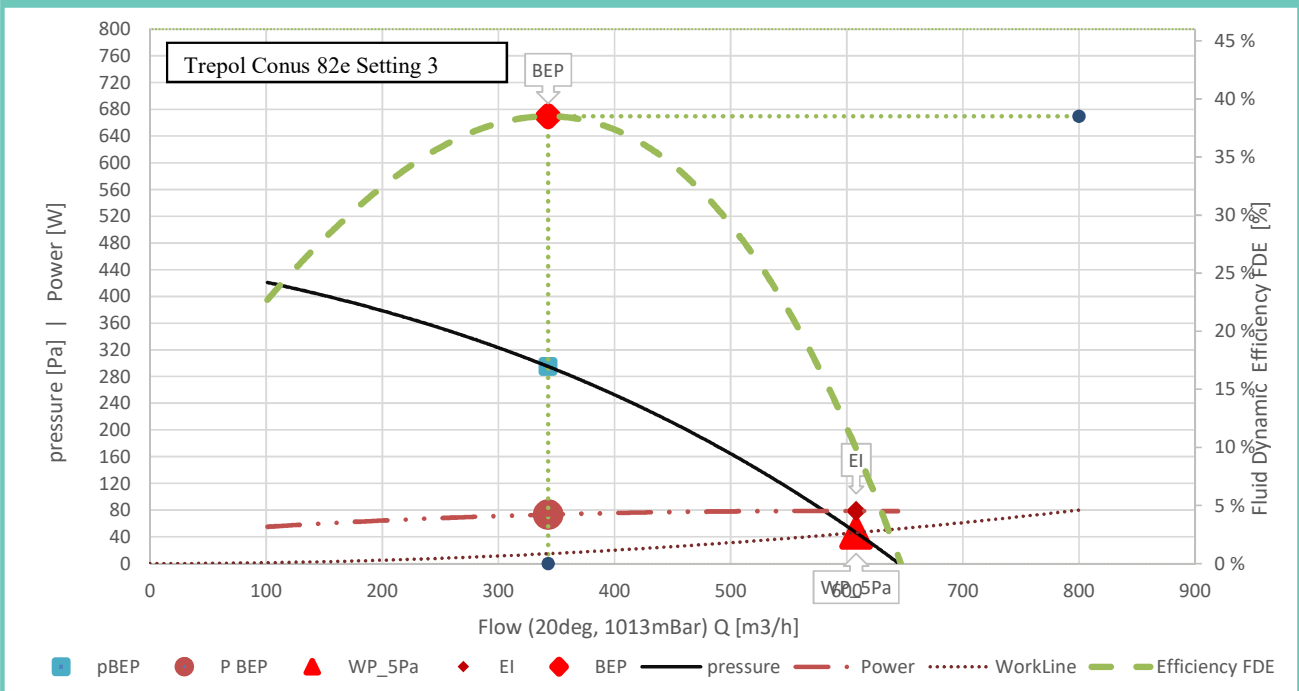




TEST REPORT

Component: Trepol - Conus - 82e
Report no.: 300-Hood-Lab-19-05
Order no.: 858171


Page: 5 of 9
Initials: BBJN/ASOV
Date: July 3, 2019

Test results - continued:

Volumetric airflow - Boost CV1300

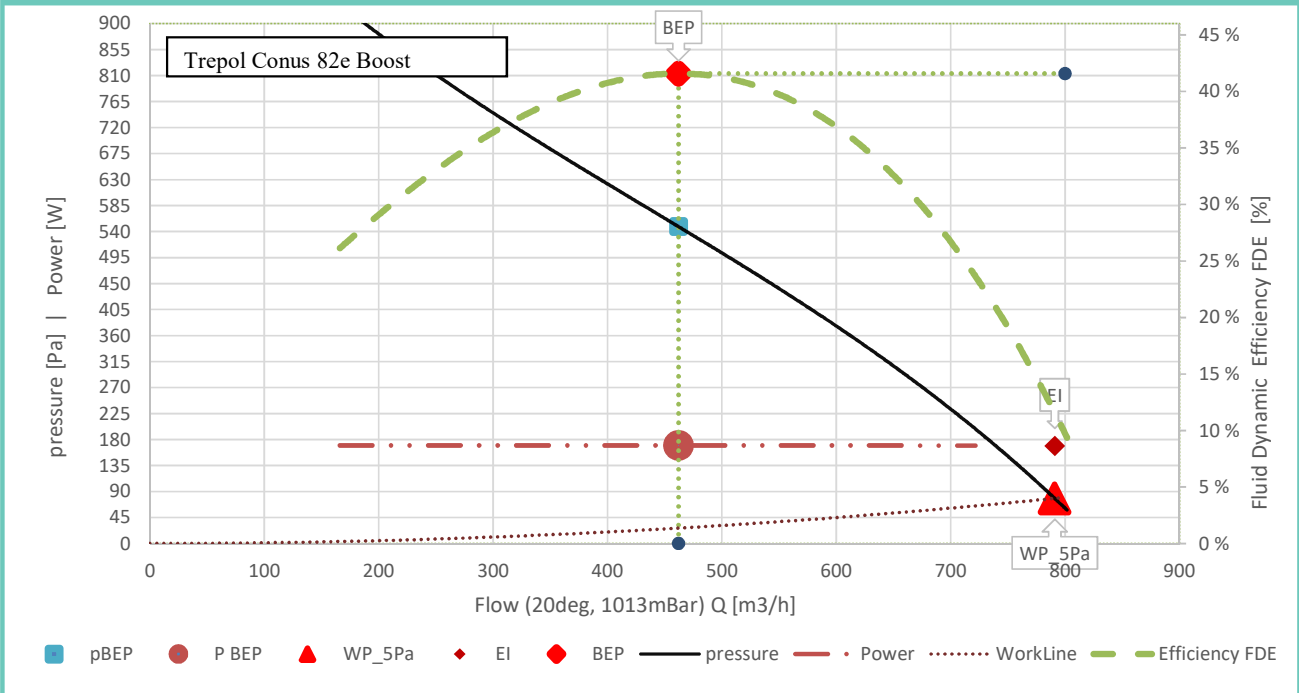

Volumetric airflow - Max CV1300

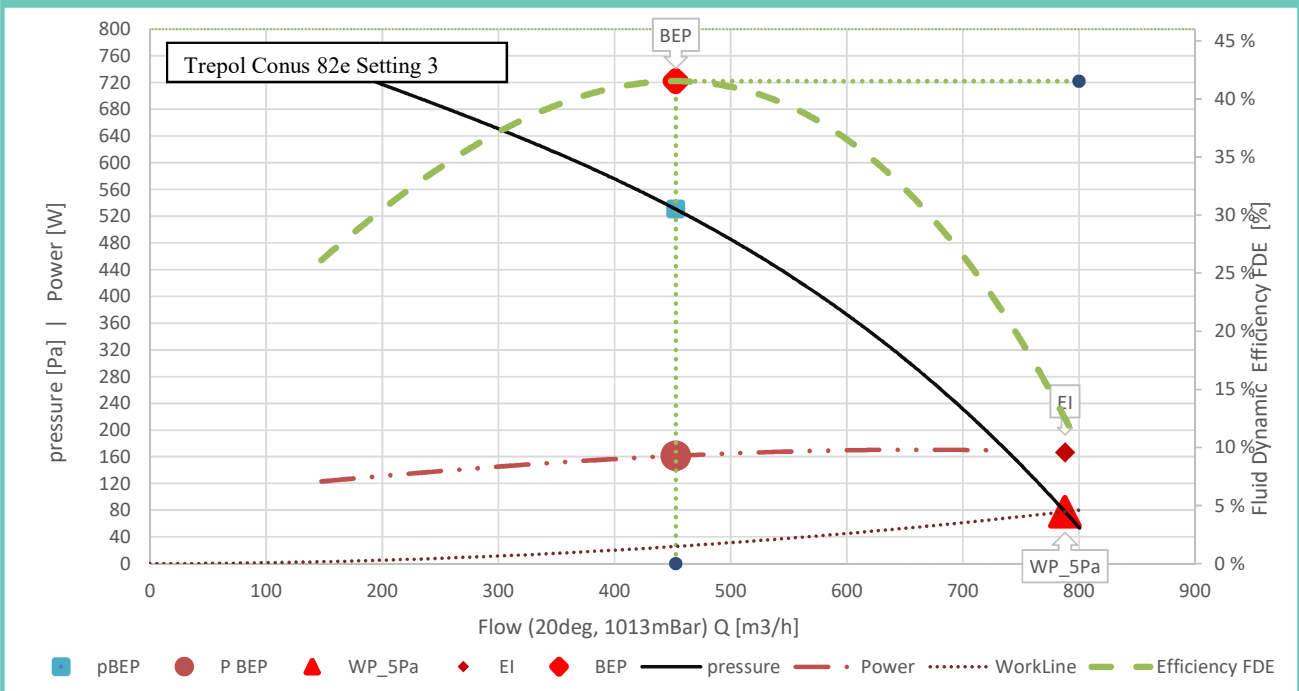



TEST REPORT

Component: Trepol - Conus - 82e
Report no.: 300-Hood-Lab-19-05
Order no.: 858171

Page: 6 of 9
Initials: BBJN/ASOV
Date: July 3, 2019

Test results - continued:

Lightning

Back left Back right Middle Back right Back right
Front left Front left Front Right Front Right
Average Light level: lux LE: Class:

Grease absorption

Filter g Abs.Filter g Airways g Range Hood g
GFE % GFE Class

Performance of odour extraction

Flowrate m³/h C1 ppm C2 ppm
O_f %



TEST REPORT

Component: Trepol - Conus - 82e
Report no.: 300-Hood-Lab-19-05
Order no.: 858171

Page: 7 of 9
Initials: BBJN/ASOV
Date: July 3, 2019

Test results - continued:

Sound Power Level CV1000

Total and Octave values:	125	250	500	1000	2000	4000	8000	Sum A	
Setting 1	37,6	42,5	47,4	44,6	43,9	30,4	22,8	51,2	dB(A) re 1pW
Setting 2	41,9	51,1	55,1	52,7	53,4	43,3	35,0	59,5	dB(A) re 1pW
Setting 3	44,5	61,2	61,5	59,2	60,1	53,0	46,0	66,9	dB(A) re 1pW
Setting 4 / Boost	45,1	60,7	62,2	0,0	60,8	53,9	47,1	67,3	dB(A) re 1pW
Background	-6,6	-1,7	3,8	8,1	12,6	17,0	19,4	23,6	dB(A) re 1pW
RefSoundSource	65,5	73,1	78,9	85,4	87,4	85,1	80,1	91,6	dB(A) re 1pW

Measured 67

The total standard deviation σ according to ISO 3743-1 in the conducted measurement is 1,6 dB.

Pleaser refer to appendix I for elaboration.

Sound Power Level CV1300

Total and Octave values:	125	250	500	1000	2000	4000	8000	Sum A	
Setting 1	40,8	49,9	53,6	51,4	51,9	40,7	31,9	58,1	dB(A) re 1pW
Setting 2	44,8	60,2	61,8	59,7	60,6	53,8	47,0	67,0	dB(A) re 1pW
Setting 3	49,3	65,1	67,7	65,3	66,0	60,2	55,5	72,5	dB(A) re 1pW
Setting 4 / Boost	49,3	65,1	67,6	65,3	66,0	60,2	55,5	72,5	dB(A) re 1pW
Background	-6,6	-1,7	3,8	8,1	12,6	17,0	19,4	23,6	dB(A) re 1pW
RefSoundSource	65,5	73,1	78,9	85,4	87,4	85,1	80,1	91,6	dB(A) re 1pW

Measured 73

The total standard deviation σ according to ISO 3743-1 in the conducted measurement is 1,6 dB.

Pleaser refer to appendix I for elaboration.



TEST REPORT

Component: Trepol - Conus - 82e
Report no.: 300-Hood-Lab-19-05
Order no.: 858171

Page: 8 of 9
Initials: BBJN/ASOV
Date: July 3, 2019

Test object pictures:





TEST REPORT

Component: Tropol - Conus - 82e
Report no.: 300-Hood-Lab-19-05
Order no.: 858171

Page: 9 of 9
Initials: BBJN/ASOV
Date: July 3, 2019

Teknologiparken
Kongsvang Allé 29
DK-8000 Aarhus C
Tlf.: +45 7220 2000
<http://dti.dk>

Appendix I - Enclosure: Sound Power emission from Range Hood:

Make and model :	Model 82e	SerNo:	Testversion
Measurement date:	27-06-2019	Initials:	BBJN

Measurement Method:

DS/EN 60704-2-13:2017 Household and similar electrical appliances - Test code for determination of airborne acoustical noise - Part 2-13: Particular requirements for range hoods.

Measurement site: Reverberation room at Technological Institute, Gregersensvej 3, Taastrup.

Measurement system:

The measurement setup consisted of six Brüel & Kjaer microphones of the type 4165 connected to a six channel A/D converter type Brüel & Kjaer LAN-XI 3050-A-060 controlled by software B&K "PULSE" version 20.0.0.455 on a Windows-10 computer.

The room temperature, humidity and appliance temperature was recorded and logged by a TSI-9565-P system. The external calibrated reference sound power source is of make Brüel & Kjaer type 4204. The determination of the sound power is based on measurements in 1/3-octaves ensuring correct frequency dependent calculation. All sound pressure measurements were determined by the energetic mean of all 6.

All measurement systems are calibrated according to DANAK certification no.300.

Measurement conditions: Temperatur 23 deg.celsius, Humidity 41 %RH.

Picture of mounted range hood:



Note: Due to mounting restrictions the hood was tilted 90 degrees.