

WG01 Smart-Link Gateway Programming Guide


Step 1:

Mobile APP Download
Scan the QR code with your mobile phone, or search for "Graffiti Smart" on the APP store or app market
Download and install




Step 2: first WiFi connection

Add gateway:


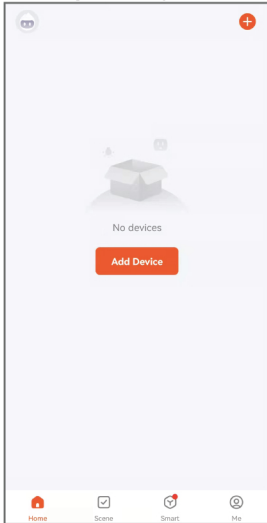


The Device power up. The gateway green light fast flash, indicate enter the pairing mode.

(Take Phone as an example)
Make sure your phone is connected to WIFI (Only supports 2.4G WIFI network) Click "+" in the upper right corner of the home page Button add device.






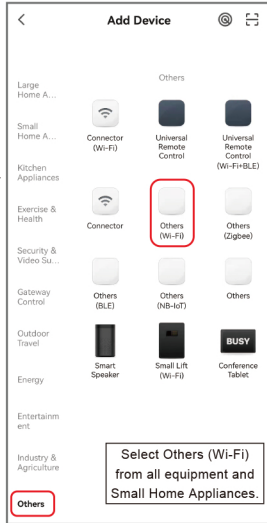


Select Others (Wi-Fi) from all equipment and Small Home Appliances.

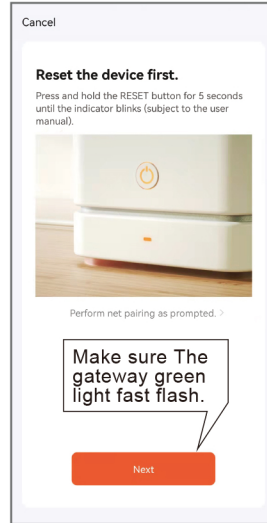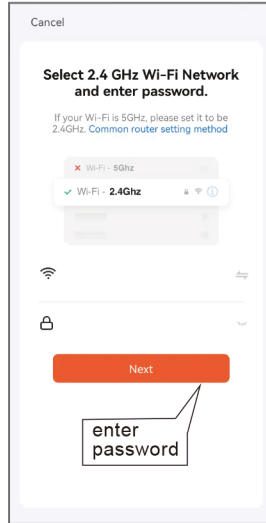

Make sure The gateway green light fast flash.

Step 3: Add subdevice

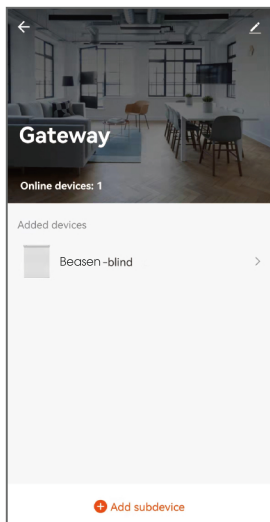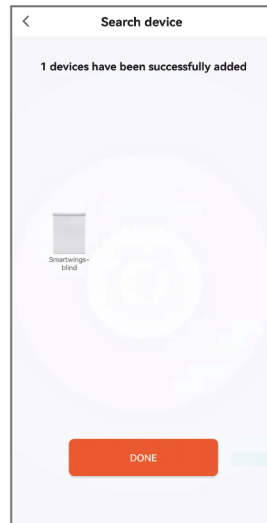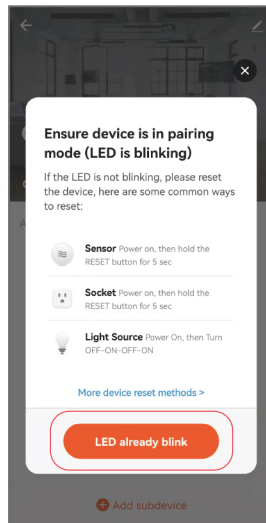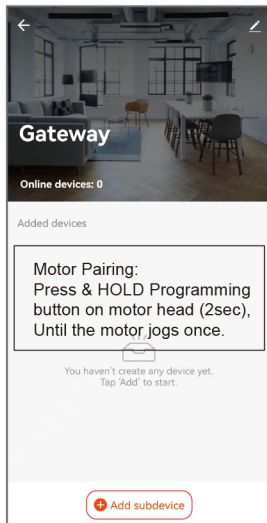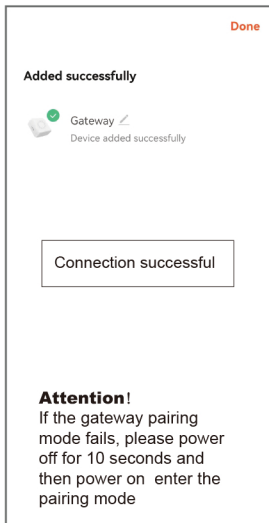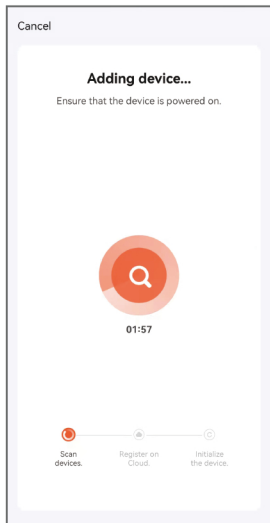


Gateway parameters

Model:WG01
Connector
433.9MHz
5V 1000mA / 5V 2000mA
2.4GHz
Max 20 motors

Function is introduced

1. remote control
APP remote control rail type, on/off.
2. Voice control
Support multiple AI smart speaker voice control sockets.
3. Scene control
Set the product to open or close from Tuya Smart APP.
4. Professional timing
Timing function: Set the time to turn the switch on or off.



Gateway reset



Press the gateway reset button for 6 seconds, when the red signal light, release the reset button.



Cut power of the gateway for 10 seconds, then plug into power socket.



The green light of the gateway starts to blink quickly, new pairing can be done.