


Smooth and durable nylon 6.6 polyamide material braided sleeving provides excellent abrasion resistance which will prevent excessive wear on hoses and wires that are in environments exposed to excessive wear.

Standard Sleeve Features and Benefits:

- Protects against physical abrasion, damage and deterioration
- Meets ISO 6945 abrasion standards
- Provides limits burst and containment protection
- Extremely durable and flexible Nylon
- Guaranteed to fit your specific application
- Multiple round ID width available

Protective Sleeving Product Highlights:

- Solution Dyed Nylon
- MSHA IC 171/1
- UV Protected
- Colors: black
- Inside Width: 1.00” - 9.125”
- Sizes Measured in Round ID: 0.71” - 5.76”
- Rolled / Printed

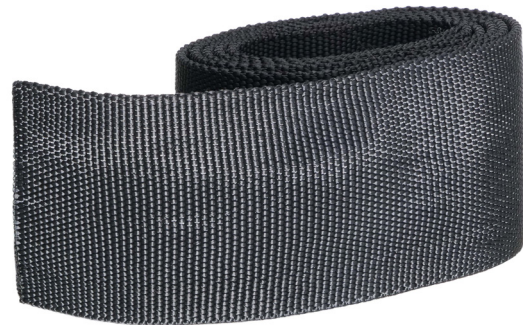

Technical Data	
Material	Nylon (Polyamide)
Operating Temperature Range, °C	-40 to 125
Melting Point, °C	230
Flammability	N/A
Standard Color	Black
Certificate	MSHA: IC293-1& IC 171/1, Abrasion ISO 6945, Burst & Leakage: SAE J343 / ISO 3457, Conductivity requirement: ISO 8031
Cutting Tool	Hot Knife



Nylon Hydraulic Fluid Protective Sleeving

Ordering Information			
Part No.	Nominal Inner Diameter, Inches	Inner Diameter, Inches	Packing Length Standard Spool, Feet
NS-012	3/4"	0.79	100
NS-014	7/8"	0.90	100
NS-016	1"	0.98	100
NS-021	1-1/4"	1.3	100
NS-025	1-1/2"	1.57	100
NS-028	1-3/4"	1.74	100
NS-033	2"	2.09	100
NS-042	2-1/2"	2.60	100
NS-049	3"	3.07	100
NS-059	3-1/2"	3.66	100
NS-070	4-3/8"	4.40	100

Color Code: Black=BLK, White=WHT Green=GRN, Red=RED, Blue=BLU, Yellow=YLW
Part No. Example: Red 100-foot spool of 1/2" sleeve = NS-008-100-RED