
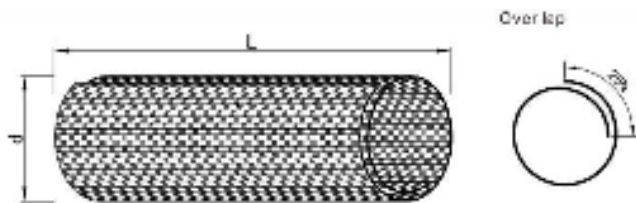


Light weight, loose weave and provides exceptional abrasion resistance, our Self Closing Braided Wrap is great for the manufacturing industry where tough and durable protection is needed.

This side-entry braided sleeving design is coiled and heat treated to self-wrap around wires and tubes without any added straps such as cable ties, Velcro® or heat shrink. The loose weave allows for great flexibility to contour cable runs with a sharp bend radius.

With a 25% overlap and continuous slit opening, cable breakouts, removing and adding cables at any time is possible inspections and maintenance.

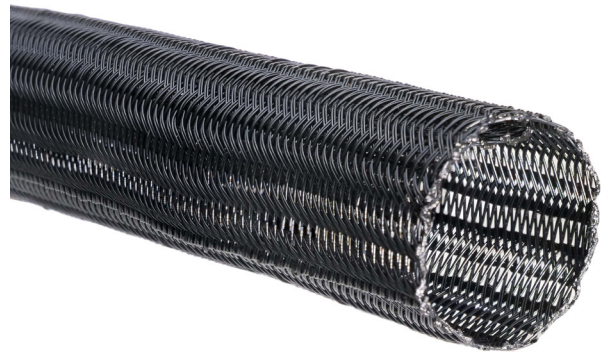

Technical Data	
Material	Polyester
Operating Range, °C	50 to 150
Melting Point, °C	240±10
Flammability	UL94-V2
Standard Color	Black
Certificate	RoHS, Halogen Free
Cutting Tool	Hot Knife, Scissors

Ordering Information					
Part No.	Nominal Size, Inches	Overlap (%)	Inner Diameter, Inches	Max Bundle Diameter, inches	Standard Spool Length, feet
BW-002	1/8"	25	0.12	0.20	100
BW-004	1/4"	25	0.25	0.28	100
BW-006	3/8"	25	0.36	0.39	100
BW-008	1/2"	25	0.51	0.55	100
BW-010	5/8"	25	0.63	0.67	100
BW-012	3/4"	25	0.75	0.79	100
BW-016	1"	25	0.99	1.03	100
BW-020	1-1/4"	25	1.27	1.31	100
BW-024	1-1/2"	25	1.5	1.58	100
BW-032	2"	25	1.98	2.06	100

Color Code: Black=BLK, White=WHT Green=GRN, Red=RED, Blue=BLU, Yellow=YLW  
 Part No. Example:100-foot spool of 1/2" red sleeve = BW-008-100-RED