


Used in applications where additional protection and high flame retardant properties are required, this high flame retardant braided sleeving is manufactured from modified polyester monofilament which is compliant with UL94 V-0. This has all the same features and works just like standard braided sleeving with an added element for additional safety.



Technical Data	
Material	Polyester
Operating Temperature, °C	-50 to 150
Flammability	VW-1
Standard Color	Black, Grey
Certificate	RoHS, REACH, Halogen Free, UL, CSA, PFOS
Cutting Tool	Hot Knife, Scissors
Melting Point, °C	230 ± 5

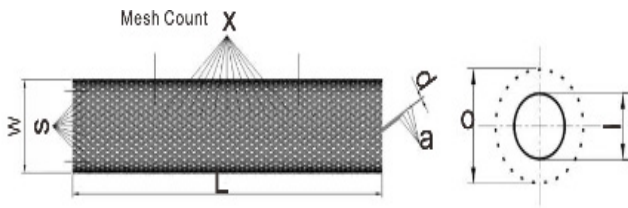

Polyester High Flame-Retardant Expandable Sleeving

Ordering Information				
Part No.	Nominal Size	Expanded Range		Packing Length
	Inches	Min, in	Max, in	Standard Spool, Feet
FRX-002	1/8"	0.04	0.24	100
FRX-004	1/4"	0.12	0.36	100
FRX-005	5/16"	0.20	0.63	100
FRX-006	3/8"	0.28	0.75	100
FRX-008	1/2"	0.32	0.95	100
FRX-010	5/8"	0.40	1.07	100
FRX-012	3/4"	0.55	1.19	100
FRX-016	1"	0.67	1.39	50
FRX-020	1-1/4"	0.80	1.98	50
FRX-024	1-1/2"	1.20	2.18	50
FRX-028	1-3/4"	1.39	2.97	50
FRX-032	2"	1.58	3.17	50
FRX-040	2-1/2"	1.78	4.16	50
FRX-048	3"	2.53	4.75	50

Color Code: Black=BLK, White=WHT Green=GRN, Red