


Polyester textile sleeve is woven from polyester multifilament. With the particularly smooth inner wall, it could reduce frictional resistance problems and provides easy installation. The tight woven construction helps dispense the flow of fluid in a ruptured hose.

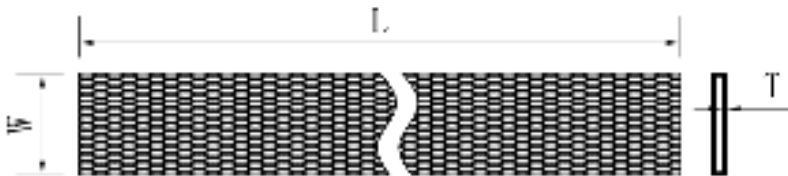

Technical Data	
Material	Polyester multifilament
Operating Temperature Range, °C	-50 to 150
Melting Point, °C	240±10°C
Flammability	UL94-V2
Standard Color	Black
Certificates	RoHS, MSHA, ISO 6945
Cutting Tool	Hot Knife, Scissors

Ordering Information				
Part No.	Nominal Size, inches	Inner Diameter, inches	Wall Thickness(T), inches	Standard Spool Length(L), feet
PS-012	3/4"	0.79	0.40	100
PS-014	7/8"	0.91	0.40	100
PS-016	1"	1.0	0.40	100
PS-020	1-1/4"	1.23	0.40	100
PS-022	1-3/8"	1.42	0.40	100
PS-025	1-1/2"	1.58	0.40	100
PS-030	1-7/8"	1.86	0.40	100
PS-033	2"	2.09	0.40	100
PS-038	2-3/8"	2.38	0.40	100
PS-042	2-5/8"	2.61	0.40	100
PS-046	2-7/8"	2.89	0.40	100

Color Code: Black=BLK, White=WHT Green=GRN, Red=RED,
Blue=BLU, Yellow=YLW Part No. Example: 100-foot spool of 1/2" of black sleeve = PS-
008-100-BLK