Q-Optics



TTL LOUPES - INSTRUCTIONS

Q-Optics

GET STARTED HERE



q-optics.com/welcome

For everything you need to get started with your Q-Optics gear including your headlight, follow the QR code or URL link for PDF manuals and instructional videos.

Thank you for making us your choice in loupes!


(972)298-2669 - local (800)858-2121 - US / Canada



support@q-optics.com



INCLUDED IN YOUR KIT

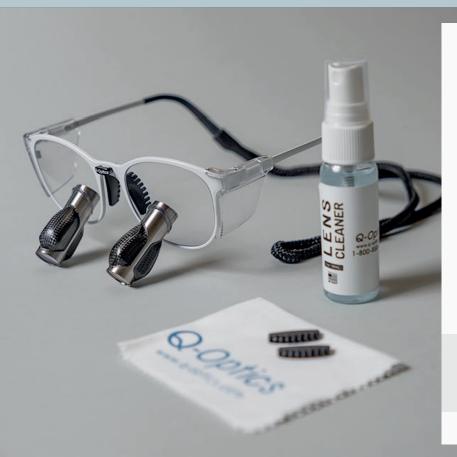

INSIDE YOUR LOUPE CASE:

- Your custom TTL Loupes
- Loupe Strap
- Replacement Nosepads
- Cleaning Solution
- Microfiber Cleaning Cloth
- Side Shields (Classic and Panto frames)
- RX Insert (Eclipse frame if purchased)

Replacement accessories are available online at: q-optics.com/shop

If your puchase also includes a headlight, you will find additional headlight accessories in your loupe case. For full details regarding your headlight, please review your headlight system manual.

Your loupe case style may vary.

QUICK DISCONNECT ACCESSORIES

HEADLIGHTS



Align the headlight mount channel opening to the Q-Optics logo mount on the frame of the loupes. The mount for the RX Insert is located on specific Eclipse frames above the fixed nosepiece and will align with the channel mount on the backside of the RX Insert itself.





Slide the headlight onto the frame until fully seated. Align the frame mount to the channel mount on the RX Insert and slide downward onto the screws. Insert should set behind nosepads.

Slide upward and off to remove.




Remove your headlight prior to washing your loupes!

Your RX insert can be removed for easier cleaning.

PRESCRIPTION INSERT (OPTIONAL)

ADJUSTING YOUR FIT

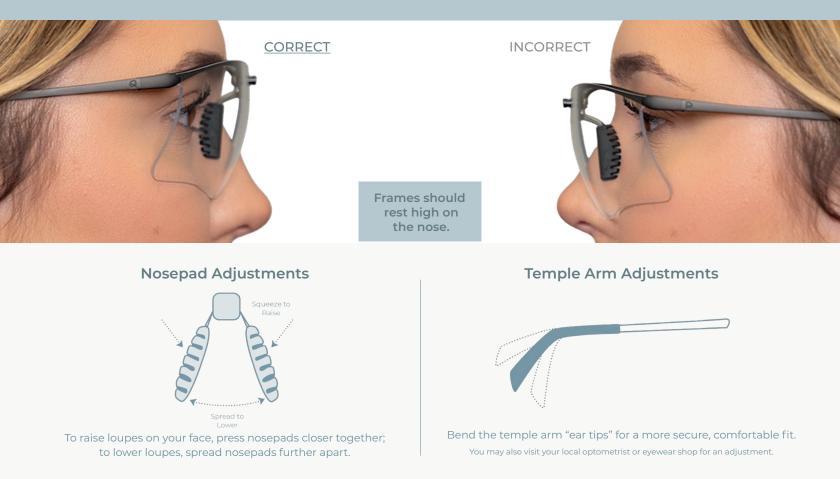

USING YOUR ACCESSORIES

Nosepads

Both saddle style and individual nosepads are installed and removed in the same manner. Remove nosepad by sliding down the metal prongs on the frame. Mount the new pad(s) by aligning the hole in the nosepad to the metal prong, sliding pad upward over the ridges of the prong until fully seated.



Sport Straps

A strap is included to help keep your loupes in place while wearing. To attach the strap to your loupes, align the hole in the rubber tip of each end of the strap to one of the silicone tips of your loupe temple arms. You may need to to wiggle the rubber end to fit over the temple arm.






. Once the side shield is pushed fully forward, the front lip will set just in front of the frame itself.

Repeat the process for the other side shield.

CLEANING YOUR LOUPES

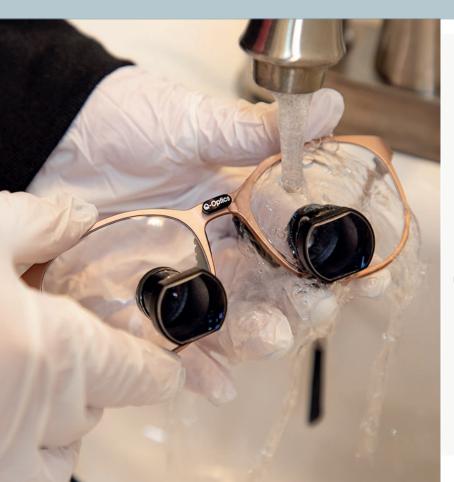



!	Never soak your loupes or headlight, not even in water
!	Never place loupes or headlights in an ultrasonic cleaner
!	Use microfiber or cotton cloth to wipe (no paper products)

PROPER CARE AND MAINTENANCE

Proper storage and care over time will help maintain the optimal performance and fit of your loupes. Keeping them stored in the custom case that is provided and adhering to the guidelines provided in this guide will preserve the durability over many years of use.

WARRANTY

Q-Optics guarantees that your loupes are free from defects in material, construction, and design for the LIFETIME of your practice.

Headlights, as electronic devices, are covered under a separate, limited warranty.

To view the warranty in full, please visit:

www.q-optics.com/support/warranty/

Replacement parts can be purchased online at: www.q-optics.com/shop

Q-Optics / Quality Aspirators

1419 Godwin Lane • Duncanville, TX 75116 P: (972)298-2669 • F: (972)298-6592 www.q-optics.com You may wish to keep these instructions for referance as well as the original packaging should you need to return your loupes for maintenance.

© 2023 Q-Optics. All rights reserved. Product specifications are subject to change at any time. UI308-10003-02, ECN 2158