



NEUSTARR



T3000 TRACK TROMMEL

Hopper

- 3.2yd3 capacity

Powerunit

- 60hp CAT C2.2 turbo
- 32 / 36cc tandem pump
- Fuel tank: 18gal cap
- Hydraulic tank: 70gal cap

Feed Conveyor

- 26qx 40+
- 4 ply 5mm top
- Drive drum diameter: 11+
- Tail drum diameter: 9+
- Max speed 180rpm
- Adjustable speed: 0-13rpm

Mobility

- Tracks: Trackline 8q5+

Fines Conveyor

- 36+wide 3 ply 5mm top
- Drive drum diameter: 11+
- Tail drum diameter: 9+
- Max speed 180rpm

Oversize Conveyor (optional)

- 36+wide 3 ply 5mm top
- Drive drum diameter: 11+
- Tail drum diameter: 9+
- Max speed 180rpm

Screen Drum


- Diameter: 5qx Length 13q
- Drive wheels: Solid 13+x 5+
- Speed: 0-20rpm



T3000 TRACK TROMMEL



T3000

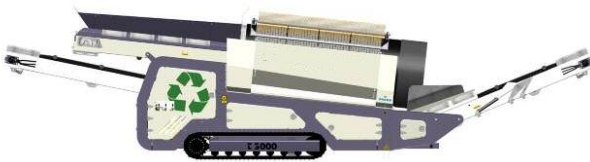

T3000 Working Dimensions

- Length: 29q+(std)
- Length: 40q9+(with o/size conv fitted)
- Discharge: 6q11+(both conveyors)



T3000 Transport Dimensions

- Length: 29q+
- Length: 35q4+(with o/size fitted)
- Width: 7q3+
- Height: 10q6+
- Weight: 18,700lbs (std)
- Weight: 20,900lbs (with o/size fitted)

