



NEUSTARR

T8048 TRACK CONVEYOR



Main Frame:



- Variable hydraulic angle
- 9q8+tracks with 16+wide shoe
- Hydraulic folding head section
- Hydraulic adjustable feed height
- Remote greasing to all bearings from ground level
- Head & tail drum scrapers

Drive:

- Diesel hydraulic with Caterpillar C2.2 37kW (50hp) power unit



T8048 TRACK CONVEYOR

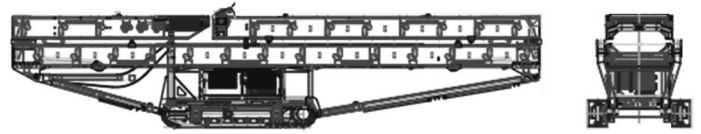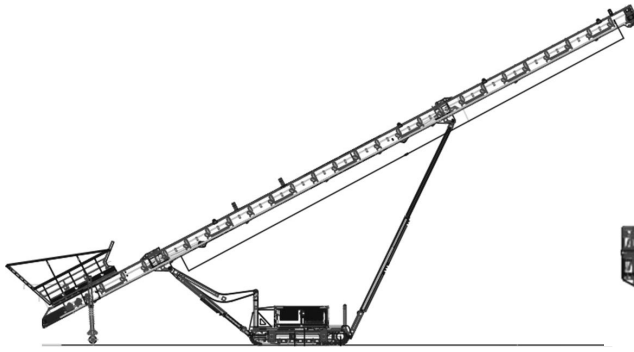

Conveyor

- Belt Width: 48+
- Belt Length: 80q
- Weight: 28,660lbs
- Discharge Height: 38q
- Stockpile Capacity: 29000tons
- Stockpile angle: 26° (max)

Transport Dimensions

- Length: 39q6+(tail & head folded)
- Length: 65' (tail folded)
- Length: 53' 3" (head folded)
- Width: 7q8+
- Height: 8q6+

Undercarriage:

- 9q8+tracks with 16+wide shoe
- Dog lead remote control
- Galvanised trestle with variable feed and discharge heights
- Hydraulic raise & lower

Feedboot:

- 6q11+Feed in height
- Larger hopper area
- Impact bed under feed area
- Guarding

Specification:

- 80qlong x 48+wide HD
- Chevron belt c/w 1+cleats
- Tail drum plough
- Capacity 2900tons
- Variable hydraulic stockpiling angle
- CAT 4.4 Diesel Engine 50hp
- Hydraulic oil cooler & fluted tank
- Full access to powerunit
- Hydraulic head and tail fold
- Check valves fitted on front lift rams
- Electric automation controls c/w dog lead
- Side skirting from feedboot to head drum both sides

