
KAIA

GLOW

INSTALLATION MANUAL

GLOW 1



Type Suspension light

Material Solid brass/crystal glass/papier-mâché

Environment Indoors

Dimensions 11,21 x 7,87 x 24,01 "


Glass Ø 7,87 x 10,23 " 6 " (can be customized)

Stem Length 6 " (can be custon Weight 6,6 lb

Certification IP20 CE US 110 V

Ceiling Rose Ø 5,9 x 1,78 "

Lamping 1x E12, Tube Light Bulbs not included





Environment Indoors

Dimensions 31,45 x 7,87 x 18,11 "

Glass Ø 7,87 x 10,23 "

Stem Length 11,81 " (can be customized)
Weight 8,8 lb


 Weight
 8,8 lb


 Certification
 IP20 CE


 US
 110 V

 Ceiling Rose
 Ø 5,9 x 1,78 "

Lamping 2x E12, Tube Light Bulbs not included







Type Suspension light

Material Solid brass/crystal glass/papier-mâché

Environment Indoors

Dimensions 31,56 x 7,87 x 31,89 "


Glass Ø 7,87 x 10,23 "

Stem Length 11,81 " (can be customized)

Weight 13,2 lb
Certification IP20 CE
US 110V

Ceiling Rose Ø 5,9 x 1,78 "

Lamping 3x E12, Tube Light Bulbs not included



^{*} Please note the glass is mouth blown. The crystal glass might have some natural imperfections which are a result of the glass manufacturing process.




INSTALLATION

Before commencing installation ensure the relevant mains supply has been safely isolated/disconnected. Installation should be carried out by a qualified electrician. Ensure all electrical connections are tight with no loose strands, including factory made connections. The Mains power must only be switched on once the fitting has been electrically connected.


GLOVES

You have chosen an oiled and waxed finish for your lighting fixtures, please make sure that these will only be touched with provided gloves and that the Care Instructions will be followed strictly.

STEP 1




STEP 2




pitch circle

STEP 3




STEP 4



Please turn the upper screw until it is tight! Do not turn the lighting fixture itself




STEP 5








Adjust the adjustable screws to the glass ball opening. There has to be a minimum of 1 mm distance between the metal and the glass.




Screw in all bulbs, then switch on the circuit and test if the bulbs are functioning. With transportation the lampholders might get interfered and the bulb will not connect correctly. In this case please disconnect the lighting fixture from the circuit, bend the contact brackets slightly to ensure that the bulbs and the lampholder are connected.



Carefully secure the glass sphere.

STEP 6.4

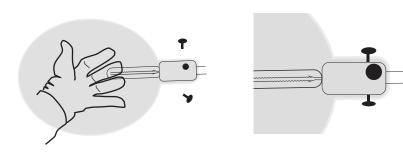

Carefully fix loosely with the supplied knurled-head screw by hand. Do not use a screw-driver. Do not screw too tightly, ensure there is at least 1 mm tolerance between the glass and the screw.

CARE INSTRUCTIONS

- 1. Use a soft dry cloth to ensure a fingerprint free surface. We recommend the use of micro fibre cloths.
- 2. Warning: do not use alcohol or other solvents for cleaning.
- * Due to the manufacturing process differences in the finish between the different brass parts might accrue.
- ** Lighting fixtures designed for the indoor environment up to 24 $^{\circ}$ C.
- *** For destinations with Mediterranean climate we highly recommend a brushed and lacquered brass finish.

