


KAIA

INSTALLATION MANUAL

GLOW

1 SUSPENSION

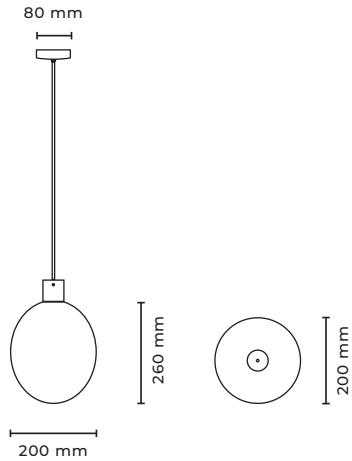

Type	Suspension light
Material	Solid brass/crystal glass/papier-mâché
Environment	Indoors
Dimensions	Glass Ø 200 x 260 mm - 7,87 x 10,23 "
Cable Length	1500 mm - 59 " (can be customized)
Weight	2,5 kg - 5,5 lb
Certification	IP20 CE
EU/UK - US	230 V - 110 V
Ceiling Rose - US	Ø 80 x 25 mm - Ø 5.9 x 1 "
Lamping	1x LED Tube: E14 115mm (3,94 ") Tube Light Bulb, clear, 2.7 W (250lm), 2600K, dimmable
Lamping US	1x E12, Tube Light Bulbs not included

Standard finishes	
200 10 207 13	oiled & waxed with clear glass, white papier-mâché and Linen cable
200 10 208 13	patinated brass with clear glass, white papier-mâché and Linen cable
200 10 201 13	brushed nickel with clear glass, white papier-mâché and Linen cable

* Please note the glass is hand blown. The crystal glass might have some natural imperfections which are a result of the glass manufacturing process.

* Due to the manufacturing process, slight differences in the finish between the different brass parts, might occur.


** For destinations with Mediterranean climate we highly recommend a brushed and lacquered brass finish.

*** Lighting fixtures designed for the indoor environment up to 24 ° C.

INSTALLATION

Before commencing installation ensure the relevant mains supply has been safely isolated/disconnected . Installation should be carried out by a qualified electrician. Ensure all electrical connections are tight with no loose strands, including factory made connections. The Mains power must only be switched on once the fitting has been electrically connected to the driver.


STEP 1 TOP VIEW



Hole size max. 4,5 mm
(0,18")


Remove the base from
the installation bracket.

STEP 2 SIDE VIEW




Affix the bracket to the ceiling with 2
screws (hole size max.
4.5 mm (0,18"), 50 mm (1,96") apart).

STEP 3 SIDE VIEW

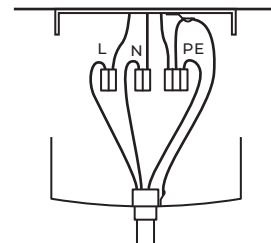


Connect the unit to the mains.

STEP 4 SIDE VIEW

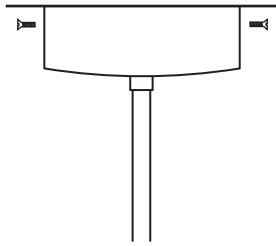


Fix the unit back on its base and retighten 2 screws on the side.

STEP 5




Adjust the adjustable screws to the glass ball opening. There has to be a minimum of 1 mm distance between the metal and the glass.

STEP 6




Screw in all bulbs, then switch on the circuit and test if the bulbs are functioning. With transportation the lampholders might get interfered and the bulb will not connect correctly. In this case please **disconnect the lighting fixture from the circuit**, bend the contact brackets slightly to ensure that the bulbs and the lampholder are connected.

STEP 7

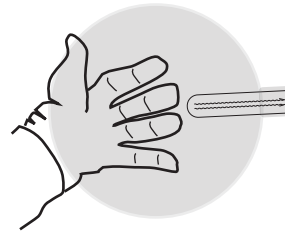

Carefully secure the glass sphere.

STEP 8

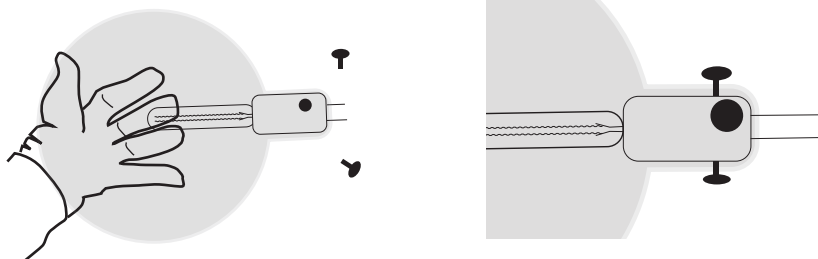

Carefully fix loosely with the supplied knurled-head screw by hand. Do not use a screw-driver. Do not screw too tightly, ensure there is at least 1 mm tolerance between the glass and the screw.

GLOVES

You have chosen an oiled and waxed finish for your lighting fixtures, please make sure that these will only be touched with provided gloves and that the Care Instructions will be followed strictly.

CAR INSTRUCTIONS

1. Use a soft dry cloth to ensure a fingerprint free surface. We recommend the use of micro fibre cloths.
2. Warning: do not use alcohol or other solvents for cleaning.