
ΚΑΙΑ

GLOW

INSTALLATION MANUAL

GLOW 5

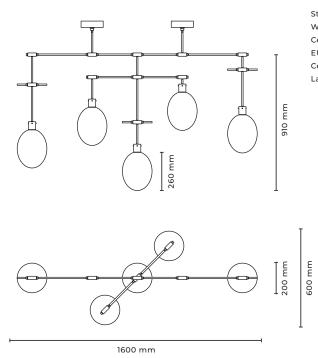

Material Environment Dimensions Stem Length Weight

Weight Certification EU/UK Ceiling Rose Lamping

Туре

Suspension light Solid brass/crystal glass/papier-mâché Indoors 1600 x 600 x 910 mm; Class Ø 200 x 260 mm 150 mm (can be customized) 10 kg IP20 CE 230 V 2x Ø 150 x 45 mm 5x LED Tube: E14 115mm Tube Light Bulb, clear, 2.7 W (250lm), 2600K, dimmable

* Please note the glass is mouth blown. The crystal glass might have some natural imperfections which are a result of the glass manufacturing process.



INSTALLATION


Before commencing installation ensure the relevant mains supply has been safely isolated/disconnected . Installation should be carried out by a qualified electrician. Ensure all electrical connections are tight with no loose strands, including factory made connections. The Mains power must only be switched on once the fitting has been electrically connected.

Both ceilig roses must be insalled at the same time.


GLOVES

You have chosen an oiled and waxed finish for your lighting fixtures, please make sure that these will only be touched with provided gloves and that the Care Instructions will be followed strictly.

STEP 1



Both ceilig roses must be insalled at the same time.




pitch circle diameter 130 mm; 4 x 90°


STEP 3

STEP 4






The cables only come out of one stem. This can simply be screwed on.



Please turn the upper screw until it is tight! Do not turn the lighting fixture itself




KAIA kaialighting.com




STEP 6.1

STEP 6.2

STEP 6.3



Adjust the adjustable screws to the glass ball opening. There has to be a minimum of 1 mm distance between the metal and the glass.




Screw in all bulbs, then switch on the circuit and test if the bulbs are functioning. With transportation the lampholders might get interfered and the bulb will not connect correctly. In this case please **disconnect the lighting fixture from the circuit**, bend the contact brackets slightly to ensure that the bulbs and the lampholder are connected.



Carefully secure the glass sphere.

STEP 6.4

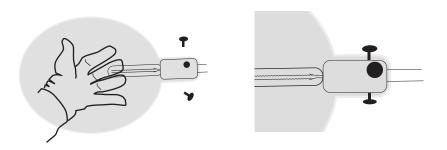

Carefully fix loosely with the supplied knurled-head screw by hand. Do not use a screw-driver. Do not screw too tightly, ensure there is at least 1 mm tolerance between the glass and the screw.

CARE INSTRUCTIONS

Use a soft dry cloth to ensure a fingerprint free surface. We recommend the use of micro fibre cloths.
Warning: do not use alcohol or other solvents for cleaning.

* Due to the manufacturing process differences in the finish between the different brass parts might accrue.

** Lighting fixtures designed for the indoor environment up to 24 $^{\circ}$ C.

*** For destinations with Mediterranean climate we highly recommend a brushed and lacquered brass finish.

