

KAIA

LIA

'Cutting through darkness'

Designed by Peter Straka
Vienna 2005-07


LIA's three-flamed elegance captivates when on, yet this suspension light almost disappears into its surrounding when the lights are off.



Process: The brass is cut, bent in its shape and polished. Then all the components are nickel plated or the brass is brushed and painted with a clear lacquer to maintain the natural effect of the brass. Lastly all parts are assembled to the LIA lighting object.

LIA

Wall Sconce
100



Type	Wall light
Material	Brass
Environment	Indoors
Dimension	1000 x 125 mm - 39.37 x 4.92 "
Weight	2.1 kg - 4.63 lb
Certification	IP20 CE; ETL US/CSA Canada
EU/UK - US	230 V - 110 V
Lamps	max. 2x 120 W, S14s, our suggestion: 2 x linear opal LED, 2700 K, 1055 lm, Mains (Phase) dimmable, EPREL-ID: 566195;
Lamps US	2x Linear opal LED S14s*, 13W, 2700K, 1150 lm, Mains dimmable (leading edge)
Standard finishes:	
050 12 101	polished nickel
050 12 201	brushed nickel
050 12 202	brushed brass
050 12 209	black matte

On very rare occasions, these lamps may appear to have a slight buzzing or flickering. As is the case with all retro LED lamps, this is likely caused by a number of outside influences such as incorrect installation, wiring, dimming or transformers and in some instances low electrical resistance.

Please contact sales@kaialighting.com for further information on dimmers etc. Please note KAIA Ltd cannot take any responsibility for the connection with your dimming or central control system. It is the customer's responsibility to ensure the compatibility with their systems.

Please ask your electrician & lighting designer for further advice.

LIA

Wall Sconce
50



Type
Material
Environment
Dimension
Weight
Certification
EU/UK - US
Lamps

Wall light
Brass
Indoors
500 x 125 mm - 19.69 x 4.92 "
1.9 kg - 4.63 lb
IP20 CE; ETL US/CSA Canada
230 V - 110 V
max. 2x 60 W, S14s, our suggestion: 2x linear opal LED, 2700 K, 470 lm, Mains (Phase) dimmable, EPREL-ID: 566200;
2x Linear opal LED S14s*, 7W, 2700K, 610 lm, Mains dimmable (leading edge)

Lamps US


Standard finishes:

050 13 101
050 13 201
050 13 202
050 13 209

polished nickel
brushed nickel
brushed brass
black matte

LIA

Wall Sconce
30



Type
Material
Environment
Dimension
Weight
Certification
EU/UK - US
Lamps

Wall light
Brass
Indoors
300 x 125 mm - 11.81 x 4.92 "
1.8 kg - 4.63 lb
IP20 CE; ETL US/CSA Canada
230 V - 110 V
max. 2x 35 W, S14s, our suggestion: 2x linear opal LED, 2700 K, 275 lm, Mains (Phase) dimmable, EPREL ID 566198;
Glass lamps not available. Please inquire.

Lamps US


Standard finishes:

050 14 101
050 14 201
050 14 202
050 14 209

polished nickel
brushed nickel
brushed brass
black matte

LIA

Suspension
Wall

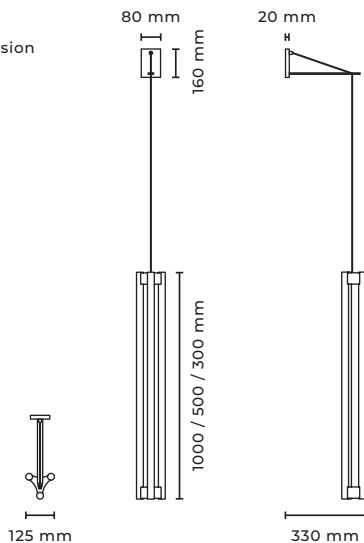

Type
Material
Environment
Dimensions
Cable Length
Weight
Certification
EU/UK - US
Lamps

Suspension light
Brass
Indoors
1000/500/300 mm - 39.37/19.68/11.81 "
Standard mounting 1500 mm - 59.05 "
2.1 kg - 26.67 lb
IP20 CE
230 V - 110 V
max. 3 x 120W, S14d
our suggestion:
3 x linear opal LED, 2700 K, Mains (Phase) dimmable
3x Linear opal LED S14s*, 13W, 2700K, 1150 lm, Mains dimmable (leading edge)
3x Linear opal LED S14s*, 7W, 2700K, 610 lm, Mains dimmable (leading edge)
Glass lamps not available. Please inquire

Lamps US 100

50

30

Standard finishes:

050 17 101 12
050 11 201
050 11 202
050 11 209

polished nickel
brushed nickel
brushed brass
blackened brass