

## CARE INSTRUCTIONS

\* On very rare occasions, these lamps may appear to have a slight buzzing or flickering. As is the case with all retro LED lamps, this is likely caused by a number of outside influences such as incorrect installation, wiring, dimming or transformers and in some instances low electrical resistance.


\*\* Please contact [sales@kaialighting.com](mailto:sales@kaialighting.com) for further information on dimmers etc. Please note KAIA Ltd cannot take any responsibility for the connection with your dimming or central control system. It is the customer's responsibility to ensure the compatibility with their systems.

# KAIA

## INSTALLATION MANUAL

### NEA


Wall / Ceiling IP44  
50

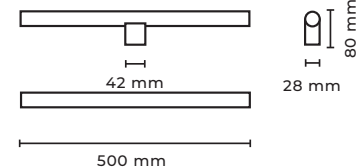

Type	Wall/ceiling light
Material	Solid brass
Environment	Indoors
Dimensions	500 x 57 mm
Weight	0.3 kg
Certification	IP44 CE
Bathroom	Zone 3
EU/UK	230 V
Lamps	max. 60 W, S14d, our suggestion: 4.9 W, 1x linear opal LED, 2700 K, Mains (Phase) dimmable* EPREL ID 566201,522907

### NEA


Wall / Ceiling IP44  
30



Type	Wall/ceiling light
Material	Solid brass
Environment	Indoors
Dimensions	300 x 57 mm
Weight	0.3 kg
Certification	IP44 CE
Bathroom	Zone 3
EU/UK	230 V
Lamps	max. 60 W, S14d, our suggestion: 3,1 W, 1x linear opal LED, 2700 K, Mains (Phase) dimmable* EPREL ID 566201, 522905

**KAIA**  
kaialighting.com

## STEP 1 FRONT VIEW




Hole size max. 4 mm

## INSTALLATION


Before commencing installation ensure the relevant mains supply has been safely isolated/disconnected. Installation should be carried out by a qualified electrician. Ensure all electrical connections are tight with no loose strands, including factory made connections.

1. Remove the base from the installation bracket.
2. Affix the bracket to the ceiling/wall with 2 screws (hole size max. 4 mm). Connect the unit to the mains.
3. Fix the unit back on its base and tighten 2 screws on the side.
4. Place the lamp in the luminiere.


## STEP 2 SIDE VIEW

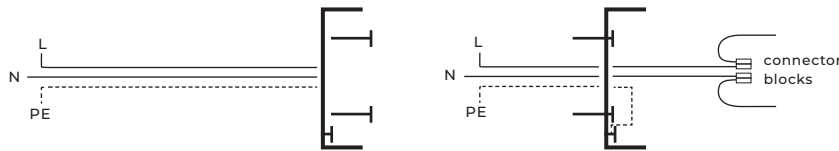

## STEP 3 SIDE VIEW

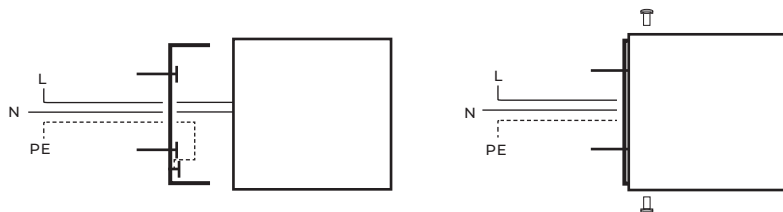


## STEP 4 SIDE VIEW

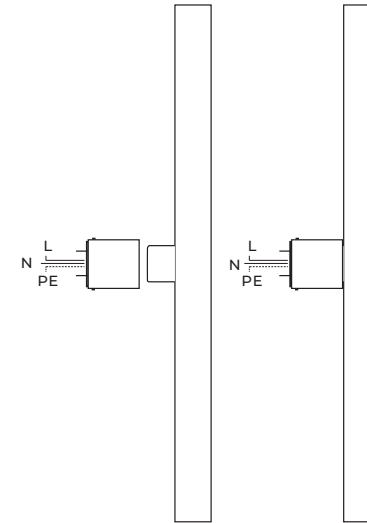

## IN CASE OF CHANGING A BULB

Please note not to discard the rubber seal when changing the bulb!

1. Remove the bulb and replace the rubber seal back into the socket.
2. Insert the new bulb

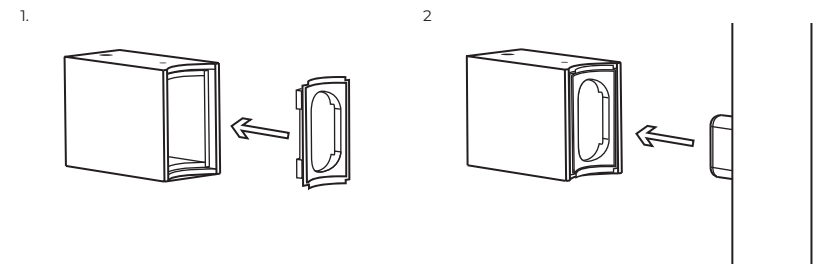

## LAMP INSTALLATION

- Before commencing installation ensure the relevant mains supply has been swit
- Use supplied fabric gloves to prevent any stains on the surface of the lamp.
- Due to risk of glass fracture handle the lamp with care!
- Whilst applying pressure push the socket into the lamp holder in the marked place. Remove the lamp from the lamp holder carefully with both hands.