
KAIA

ONA


INSTALLATION MANUAL



Туре Suspension light Material Solid brass Environment Indoors Dimensions Ø 42.1" 78.74" Cable Length Weight 19.8 lb Certification IP20 CE LED Watt 113 W Lamps

LED technology, 24 V*, Warm White 2700 K, 16500 lm, Energy Class A






Suspension light Туре Material Solid brass Environment Indoors Dimensions Ø 29.68" Cable Length 78.74" Weight 7 kg Certification IP20 CE LED Watt 79 W Lamps

LED technology, 24 V*, Warm White 2700 K, 11500 lm, Energy Class A

STEP 1



INSTALLATION


Before commencing installation ensure the relevant mains supply has been safely isolated/disconnected. Installation should be carried out by a qualified electrician. Ensure all electrical connections are tight with no loose strands, including factory made connections.

1. Fix the base plate to the mounting surface using 4 No. 0.15" screws. Ensure the fixing points can support the weight of the fixture.


Connect the unit to the mains. Please refer to Dimmer Unit installation manual if you connect the fitting to the dimming system.

- $\ensuremath{\mathsf{2}}.$ Suspend the wire by passing through the clutch to the required length.
- 3. Lastly fix the top plate.

STEP 2

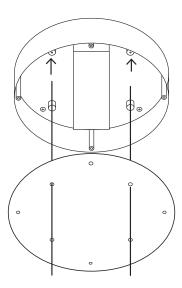


STEP 3

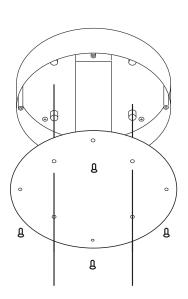




ONA

Mounting Options

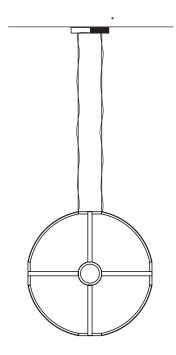

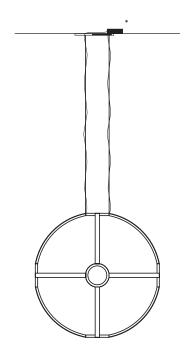

DIMMING OPTIONS

Dimming options are available on request (Phase Cut, Bluetooth (Casambi), 1-10 V, Dali, RemoteControl). Lighting control system specifications should be clarified before placing the order.

CARE INSTRUCTIONS

- 1. Use a soft dry cloth to ensure a fingerprint free surface. We recommend the use of micro fibre cloths.
- 2. Warning: do not use alcohol or other solvents for cleaning.
- * Please contact sales@kaialighting.com for further information on dimmers etc. Please note KAIA Ltd cannot take any responsibility for the connection with your dimming or central control system. It is the customer's responsibility to ensure the compatibility with their systems.



^{*} Power supply location