

KAIA


SIM

INSTALLATION MANUAL

MAINLY SUITABLE FOR INSTALLATION ON PLASTER WALLS AND JOINERY.
FOR FURTHER INFORMATION PLEASE CONTACT SALES@KAIALIGHTING.COM.

SIM

Frame Small 50

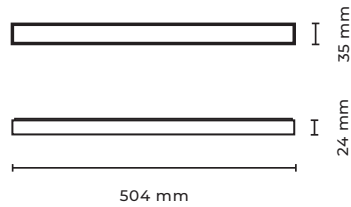

Type

Material

Environment

Dimensions

Weight

Certification

Lamping*

Wall/ Ceiling light

Solid brass

Indoors

504 x 35 x 24 mm


1,5 kg

IP44 CE

LED technology: 24V, 7W, 2700K,
dimnable, 742lm

SIM

Frame Large 50

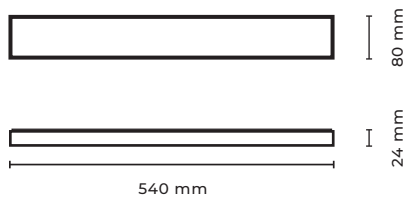

Type

Material

Environment

Dimensions

Weight

Certification

Lamping*

Wall/ Ceiling light

Solid brass

Indoors

540 x 80 x 24 mm


2 kg

IP44 CE

LED technology: 24V, 14W, 2700K,
dimnable, 1500lm

SIM

Frame Small 100

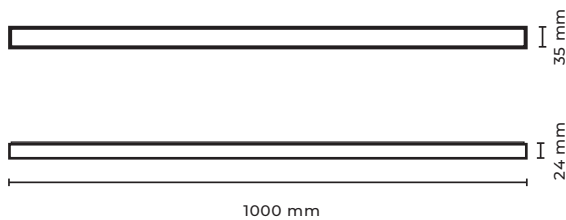

Type

Material

Environment

Dimensions

Weight

Certification

Lamping*

Wall/ Ceiling light

Solid brass

Indoors

1000 x 35 x 24 mm

2 kg

IP44 CE




LED technology: 24V, 14W, 2700K,
dimnable, 1484lm

INSTALLATION


Before commencing installation ensure the relevant mains supply has been safely isolated/disconnected. Installation should be carried out by a qualified electrician. Ensure all electrical connections are tight with no loose strands, including factory made connections.

The Mains power must only be switched on once the fitting has been electrically connected to the driver.

CABLE AND SCREW HOLE POSITIONS

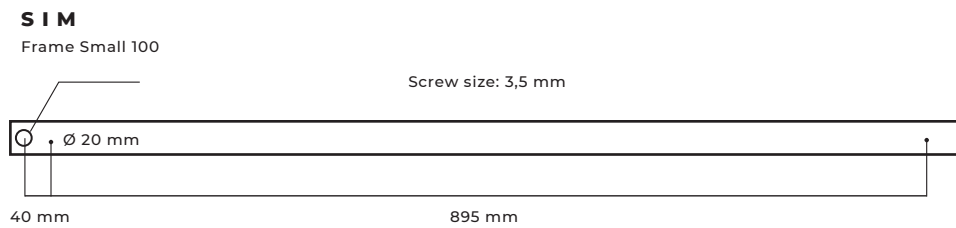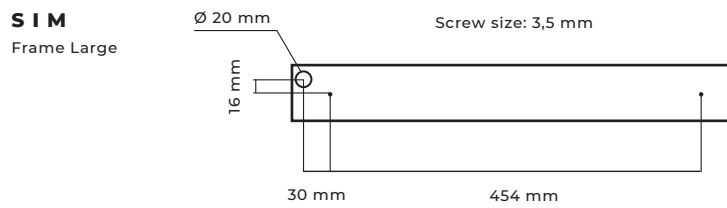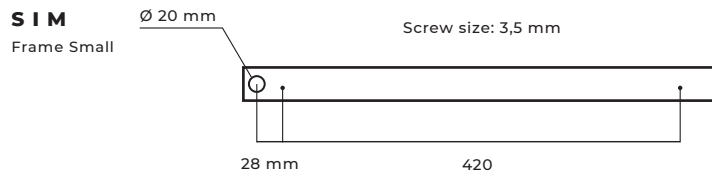


STEP 1




Connect the transformer to the luminaire before connecting the luminaire itself.

STEP 2




Connect transformer with power cable from the wall

STEP 3



Make the transformer disappear into the wall

STEP 4

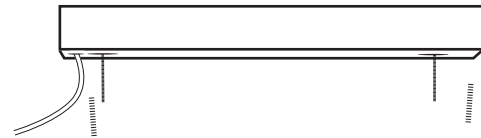

Screw the luminaire to the wall with the two screws (with the plugs).

CARE INSTRUCTIONS

1. Use a soft dry cloth to ensure a fingerprint free surface. We recommend the use of micro fibre cloths.
2. Warning: do not use alcohol or other solvents for cleaning.
3. For destinations with Mediterranean climate we highly recommend a brushed and lacquered brass finish.

DRIVER LOCATION

Lights supplied with an external non-dim 24V driver as standard. Additional dimmer needs to be specified.

DIMMING OPTIONS

Dimming options are available on request (Phase Cut, Bluetooth (Casambi), 1-10 V, Dali, RemoteControl). Optional: Dim to warm - for more information please contact sales@kaialighting.com. Lighting control system specifications should be clarified before placing the order.

The PSU/dimmer are external separate components, dimensions are the following: length: 90 mm, width: 65 mm, height: 40 mm.

* Please contact sales@kaialighting.com for further information on dimmers, transformers etc. Please note KAIA Ltd cannot take any responsibility for the connection with your dimming or central control system. It is the customer's responsibility to ensure the compatibility with their systems.

** Lighting fixtures designed for the indoor environment up to 24 °Celsius.