



Portable EV charger - Model B




Two types of plugs are available.



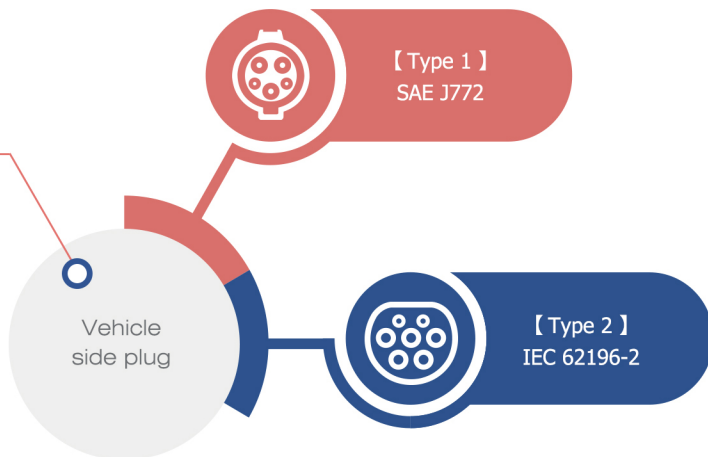

 Meet IEC 62752, Type B AC 30mA DC 6mA

Multiple plugs can be matched

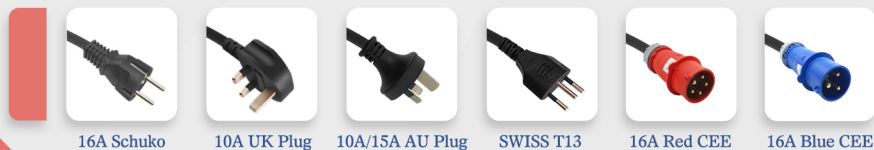6A-16A Series



10A-32A Series



Electronic Data

Input voltage/Output voltage	230V AC
Adjustable current -1	6A-8A-10A-12A-16A
Adjustable current -2	10A-16A-20A-24A-32A
Max Power-1	3.6kw single phase
Max Power-2	7.2kw single phase
Input frequency	50Hz/60Hz
Charging connetor	Type 1 / Type 2
Cable length	5m / customizable

Function

Ethernet/WIFI/4G/Bluetooth	No
Screen	LCD
LED Indicator light	Flash
Current adjustable	√
Delay start timer	√
Automatic recovery charging	√

Working environment

Safety	12 safety protection built in
RCD	Type B, AC 30mA + DC 6mA
IP Grade	Box IP 66, Plug IP 67
Environment temperature	-30°C ~ +50°C

Guarantee


Warranty	12 months
Certificate	TUV CE

Packing


Dimension	400*400*100mm
Net Weight	16A: 2.2KG 32A: 3.2KG
Carry bag	optional

PRODUCT DETAILS

01 LCD Screen

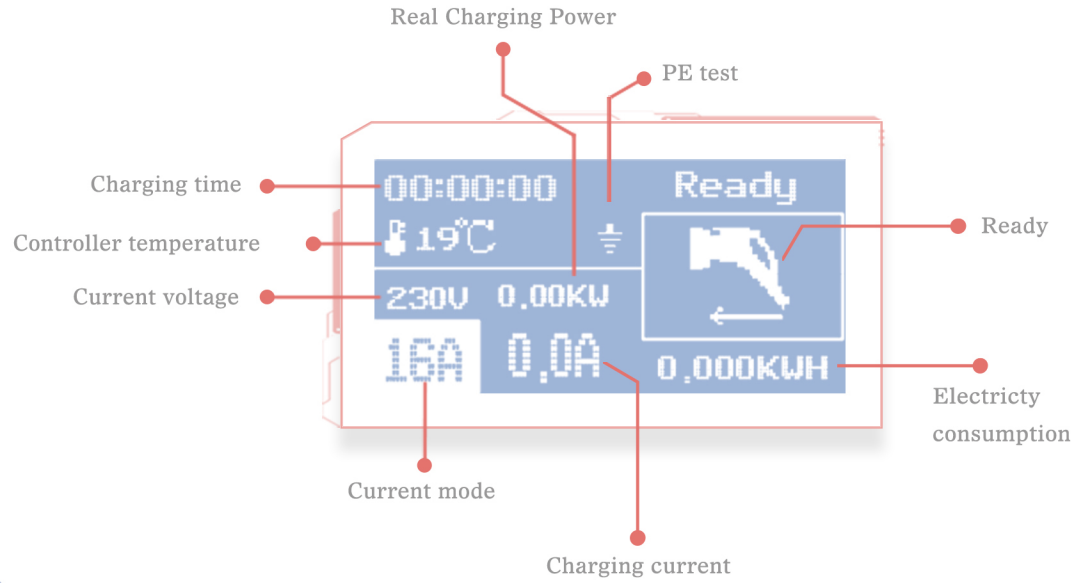

02 Delay start timer

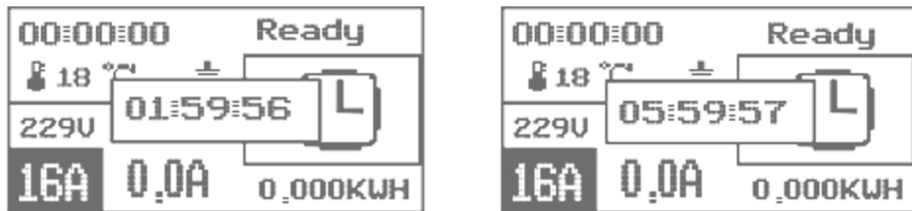

- Without dblclicking
- 1st Double click
- 2nd Double click
- 3rd Double click
- 4th Double click
- 5th Double click


- No Timer; Charging starts immediately.
- Start Charge session after 2 hours.
- Start Charge session after 4 hours.
- Start Charge session after 6 hours.
- Start Charge session after 8 hours.
- Turn off timer; Charging starts immediately.

03 Leakage protection

- Type B :AC 30mA DC 6mA leakage protection



04 Temp sensor in PCB

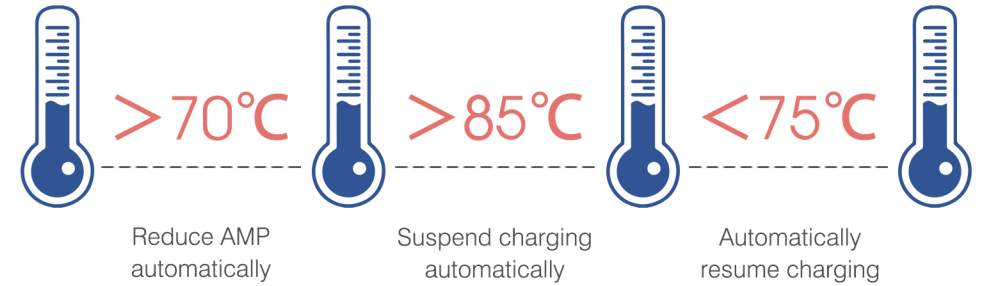

05 12 Safety protection

- Vehicle pulsating DC leakage protection
- Pressure Resistant Flame Retardant
- Electrostatic Protection
- Protecting Earthing Detection
- Crush Test
- Circuit board Temp Sensor
- Overcurrent Protection
- Water-proof Protection
- Intelligent Kernel
- Overvoltage Protection
- Undervoltage Protection
- Lightning Protection