

HCG-49 Series / Data sheet



12V 200Ah

12V 240Ah

24V 100Ah

48V 50Ah



Model Included:

- **HCG49-12200** 12V 200Ah LiFePO4 Battery
- **HCG49-12240** 12V 240Ah LiFePO4 Battery
- **HCG49-24100** 24V 100Ah LiFePO4 Battery
- **HCG49-3660** 36V 60Ah LiFePO4 Battery
- **HCG49-4850** 48V 50Ah LiFePO4 Battery

		Model				
		HCG49-12200	HCG49-12240	HCG49-24100	HCG49-3660	HCG49-4850
Electrical Specifications	Nominal Voltage	12.8V	12.8V	24V	36V	48V
	Nominal Capacity	200Ah	240Ah	100Ah	60Ah	50Ah
	Parallel Connection	Max. 6units	Max. 6units	Max. 6units	Max. 6units	Max. 6units
	Serial Connection	Max. 6units	Max. 6units	Max. 2units	No	No
	BMS	4S150A	4S200A	8S100A	12S60A	16S50A
	Circuit Protection	Over charge, Over discharge, Over current, Over temp, Short, Balance				
	Cycle Life	3000times Cycles @100%DOD and 6000times @80% DOD				
	Self Discharge	Less than 3% per month				
	Charge Efficiency	100% @0.2C				
	Discharge Efficiency	98-100% @1C				
Charge Specifications	Charge Voltage	14.4±0.2V	14.4±0.2V	28.8±0.4V	43.2±0.6V	57.6±0.8V
	Standard Current	40A	48A	20A	12A	10A
	Fast Current	100A	120A	50A	30A	25A
Discharge Specifications	Standard Current	40A	48A	20A	12A	10A
	Max. Con. Current	150A	200A	100A	60A	50A
	Peak Current	600A(300ms)	800A(300ms)	500A(300ms)	200A(300ms)	200A(300ms)
	Cut-off Voltage	10V	10V	20V	30V	40V
Mechanical Specifications	Dimensions (mm)	490×171×240mm (Group 49)				
	Approx Weight(KG)	22	23	22	20	20
	Terminal Type	M8				
	Case Color/material	Black Plastic case (ABS)				
	IP Rating	IP65				
	Cell Type	Cylindrical LiFePO4 cell				
	Cell holder	Yes				
Temperature Specifications	Charge Temp	0°C to 55°C		(32°F to 131°F)		
	Discharge Temp	-20°C to 60°C		(-4°F to 140°F)		
	Storage Temp	-5°C to 45°C		(23°F to 113°F)		

HCG-49 Series / Data sheet

12V 200Ah

12V 240Ah

24V 100Ah

48V 50Ah

Key Points for Quality control:

- **Cell match:**
More strict cell matching standard, the difference of Internal resistance is 1mΩ and voltage is 5mV.
- **Automatic cells welding:**
Cells are assembled by Automatic welding equipments to ensure the quality reliability and consistency.
- **100% Cycle test:**
All battery packs are 100% cycle tested (Fully Discharged→Fully Charged→Fully Discharged→60% Charged) before package and all test reports are stored.
- **Unique tracking number:**
All battery packs are lasered an unique number on the case side for quality tracking.

Certifications:

- UL1642 (Cell)
- IEC62133 (Cell)
- IEC62619 (Cell)
- CE (Pack)
- UN38.3 (Cell / Pack)
- ROHS (Cell)


MSDS



UN38.3




Dimensions:

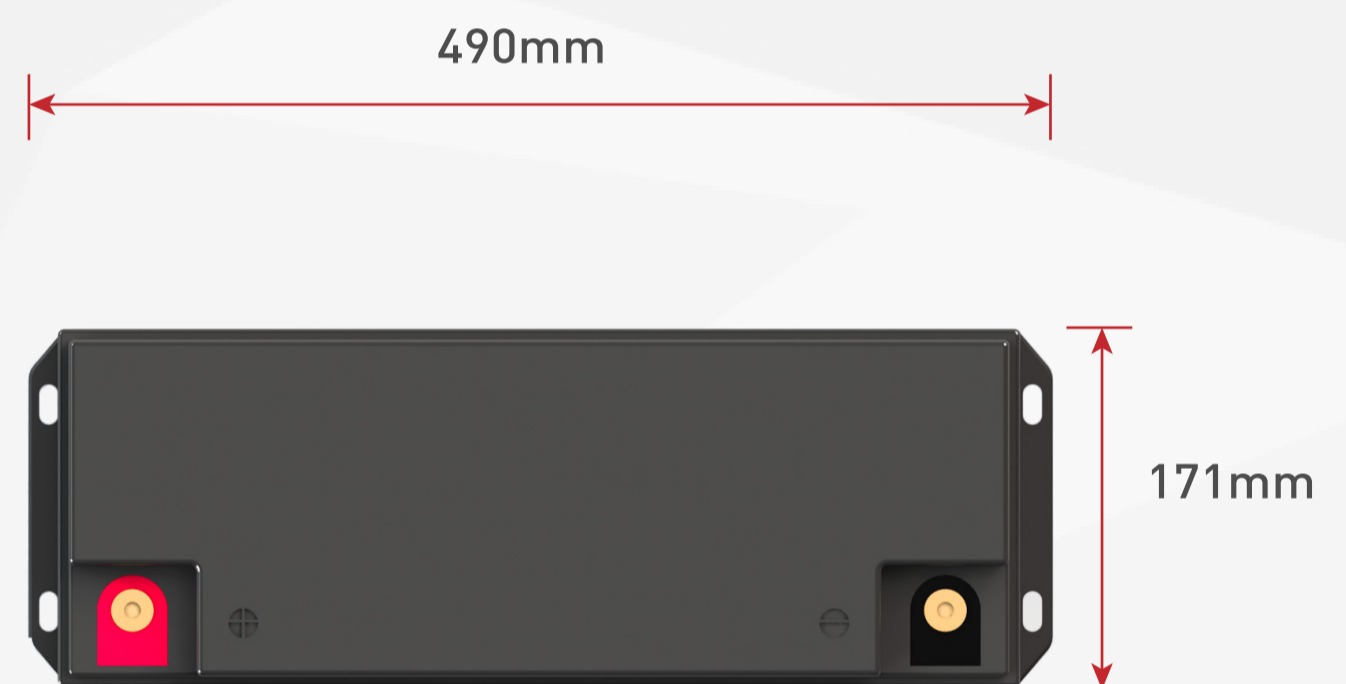

Internal Structure:

Molded Plastic cell holder

Molded Nickel sheet

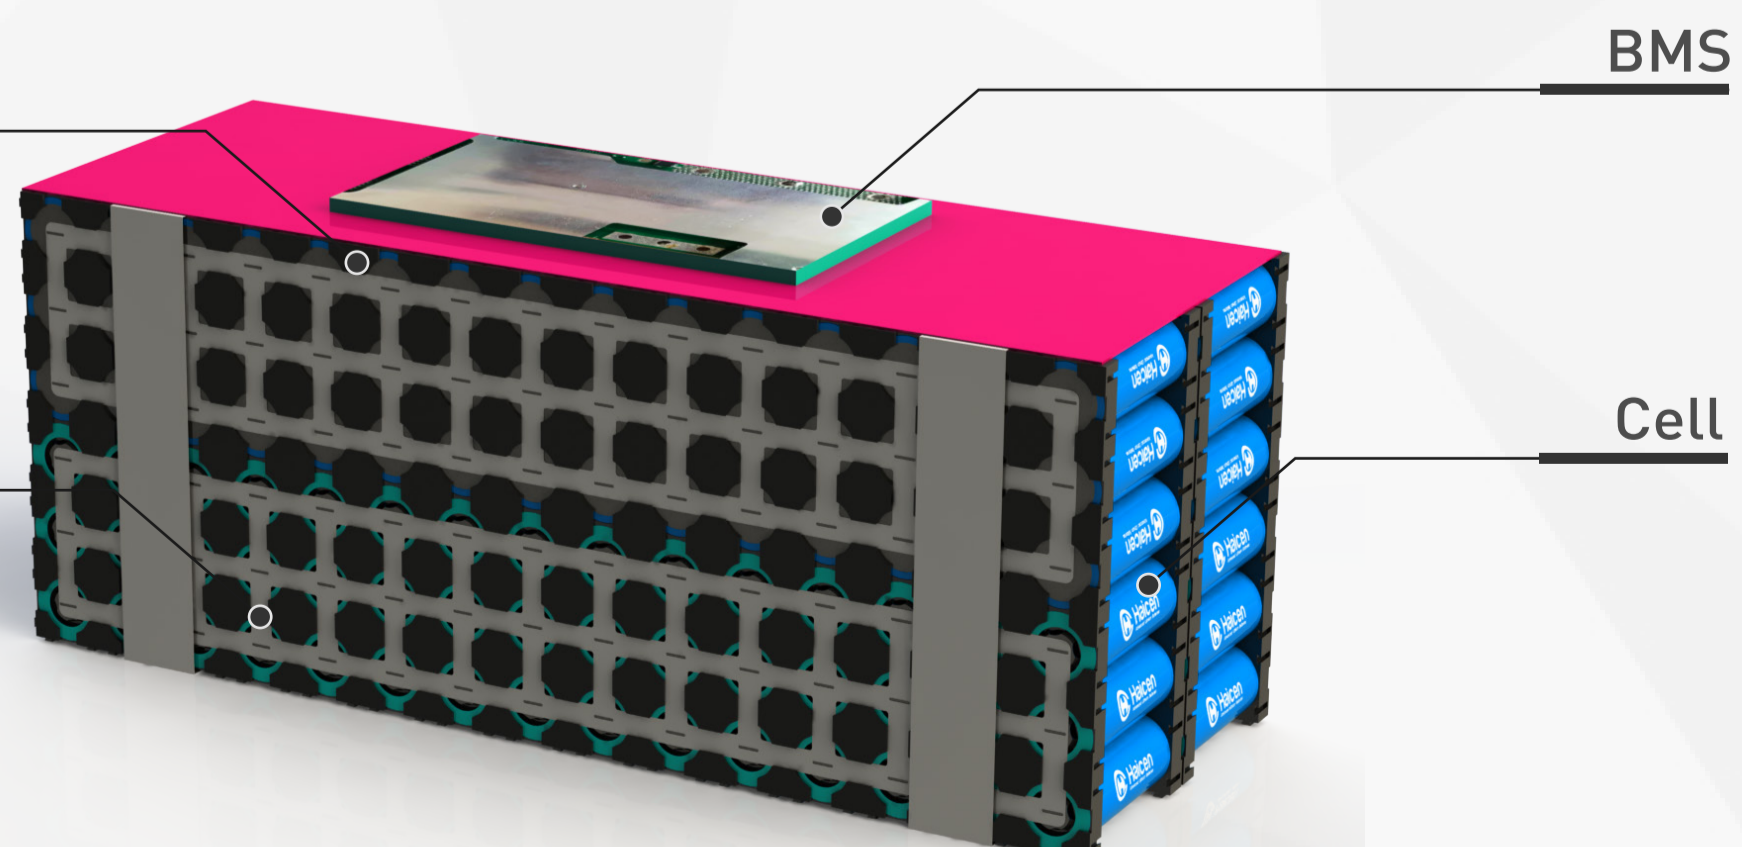

12V 200Ah

12V 240Ah

24V 100Ah

48V 50Ah

Key Benefits:

- Higher qualified cylindrical cell:**
 UL1642, IEC62619, IEC62133 listed with Cycle life more than 3000times and excellent consistency.
- Stronger BMS:**
 Can support the batteries in parallel and series connection
- More stable and firm internal structure:**
 Cell holders can well protect and separate the cells to avoid any circuit short risk caused by vibration or impact or over current, and improve the heat dissipation.
- Smaller size and less weight:**
 The size of our battery is just 3/4 size of the standard 12V 100Ah battery from other suppliers.

Market Applications:



RV



Marine



Golf cart



Light EV



Energy storage



Cleaning



Robotics



Lighting

Package:

20' Container=10Pallets=400Cartons=400Units;
 40' Container=20Pallets=800Cartons=800Units;



Internal Package
 Forming pearl foam

1Carton=1Unit



Weight: 23Kg/carton
 Size(L×W×H): 570×250×330mm

1Pallet=40Cartons



Weight: 930Kg/pallet
 Size(L×W×H)=1.2×1×1.8m ≈ 2.2CBM

Customized items:

- Case color:** Customized case color is acceptable based on quantity more than 300pcs per batch.
- Label design:** We can help you to design customized label on the battery.
- Carton design:** Customized carton is acceptable based on quantity more than 200pcs per batch.
- Certificates:** 50% discount on certificates cost for first bulk order and 100% reback for future orders.
- NDA agreement:** NDA agreement is allowed and necessary to protect your benefits.