




Remove Factory Grille From Vehicle



Place Grille Insert onto Factory Grille

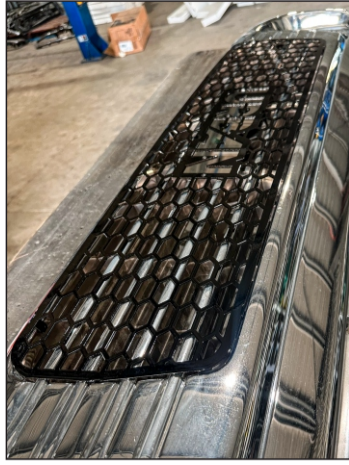

Check that the Grille Insert is sitting correctly



Mark out the parts of factory grille that need to be removed



Check for factory mounts and cut around them (You need them to hold the grille on the vehicle)



Place masking tape around marks so you do not scratch the factory grille



Grille will look like this  
**Note: Some grilles have multiple parts and you might be able to remove this to get a cleaner cut**



Place the grille insert on top and check the cut lines



Grab your cutting tool  
A vibrating multi tool is the quickest and cleanest tool



Start cutting the factory grille being careful not to scratch it



You may need to flip it over for some parts



Remove the inside and your grille should look like this



Sand all rough edges till smooth




Place Grille Insert into Factory Grille and check fitment



If the Grille Insert fits correctly remove the masking tape



Wipe off all marks and prepare to install grille  
**Note: This is when you should paint your factory grille if desired**

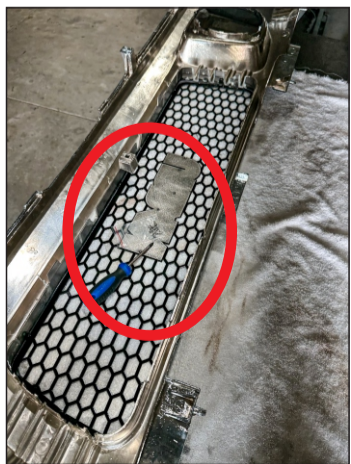

Flip grille over and place onto a towel so you do not scratch it and prepare the provided mounting hardware



Hold grille at desired mounting depth and screw in the stainless screws where required



Flip grille over and check mounting depth is even



Your grille insert is now fitted and ready to be reinstalled on the vehicle