

RF RENOVAT FACTOR
Assembly and Installa
Caution :
 DO NOT ASSEMBLE THE GLASS SHADE BEFORE M BEFORE INSTALLING FIXTURE, MAKE SURE THE PO THE MAIN FUSE BOX / CIRCUIT BREAKER UTILITY E DO NOT INSTALL INTO A CEILING THAT CONTAINS F
Important Safety Instructions :
 The ceiling fastener / threaded bolt are meant for drywal The installation is not to be made on a radiant-heating c These instructions are provided for your safety. It is very completely before beginning the assembly and installation We strongly recommend that a professional electrician in This product must be installed in accordance with the approximation with construction and operation of the product and the heat

- The lighting fixture is meant for indoor use, dry locations only. It must be connected only to 3-wire, single-
- phase electrical supply systems (provided with Ground wire or equivalent protection system). • For your safety, it is strongly recommended that three people install the lighting fixture.
- To avoid the risk of fire, do not exceed the recommended wattage.
- · Save these instructions.

Warning :

- To reduce the risk of fire, electrical shock or personal injury, always turn off light fixture and allow it to cool prior to replacing light bulb.
- Do not touch bulb when fixture is turned on. Do not look directly at lit bulb.
- · Keep flammable materials away from lit bulb.

Pre-assembly :

- Remove all parts and hardware from box along with any plastic protective packaging.
- Do not discard any contents until after assembly is complete to avoid accidentally discarding small parts or hardware.
- · For your safety and convenience, assembly by three people is recommended.
- The glass mold should not be removed before installation.




L060026620151

tion Instructions

IOUNT THE CANOPY TO THE CEILING. OWER TO THE CIRCUIT IS TURNED OFF AT BOX. RADIANT HEATING.

Ill ceiling mounting only.


- eiling.
- important that they are read carefully and
- on of this lighting fixture.
- install all direct wire fixtures.
- oplicable installation codes by a person familiar azards involved.

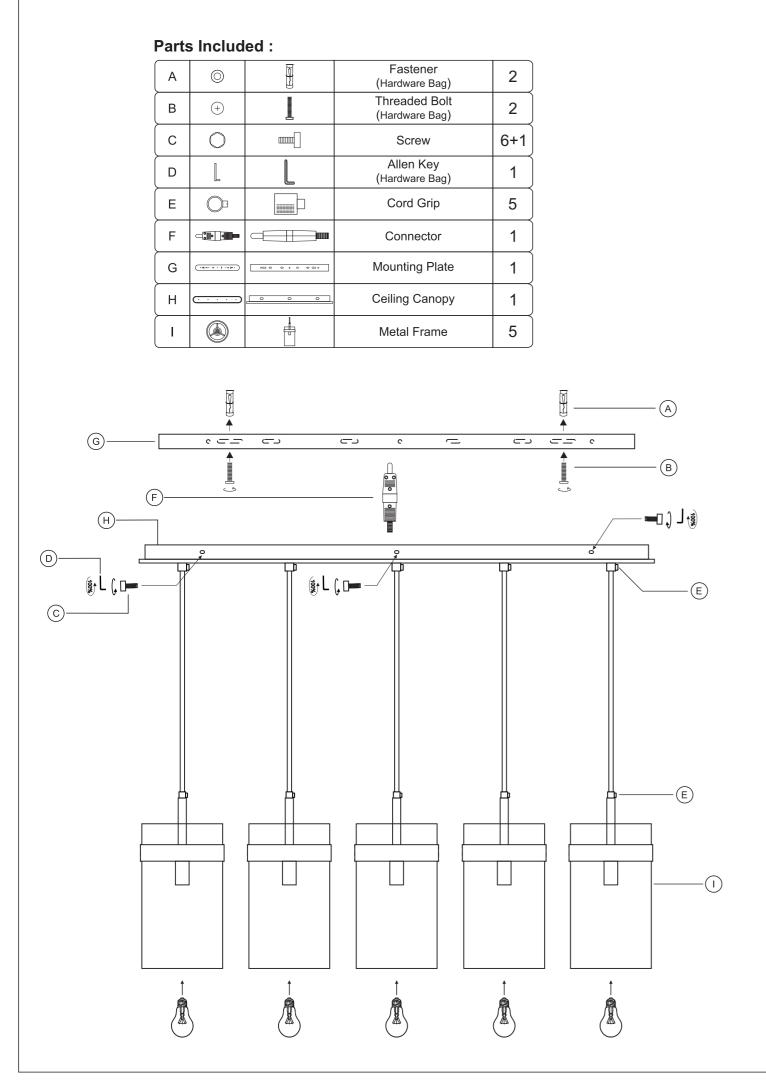


Assembly and Installation Instructions :

Carefully unpack all fixture parts and hardware and lay out them on a clear workspace.

STEP 1 Unscrew Mounting Plate : Disassemble the mounting plate from the ceiling canopy as shown below, with the hardware provided.

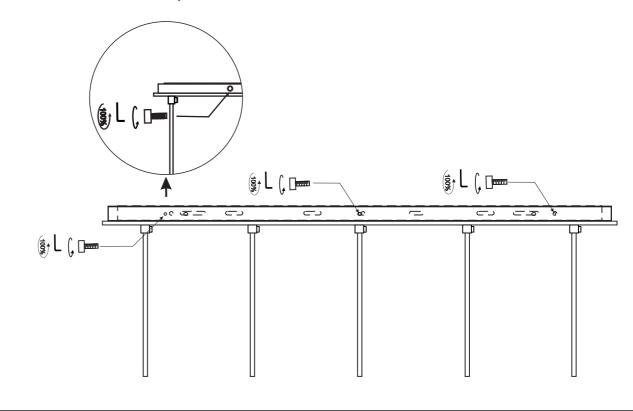



colored wire to phase, blue colored wire to neutral and green yellow colored wire to earth.

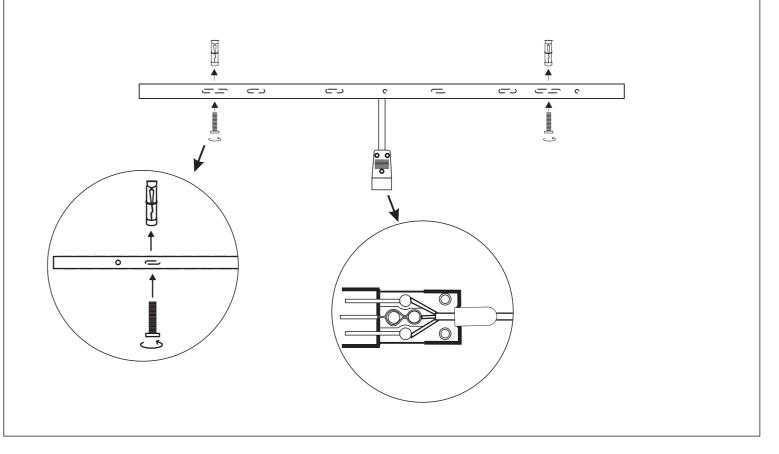

SHUT OFF THE MAIN ELECTRICAL SUPPLY FROM THE MAIN FUSE BOX/CIRCUIT BREAKER!

STEP 2 Installation Mounting Plate : Install the mounting plate to the ceiling using the fastener. Allign with the three holes of the of the ceiling. Tighten the threaded bolt. Take out the main wire through the mounting plate. Connect the female part of the connector to the main supply wire. Attach the brown

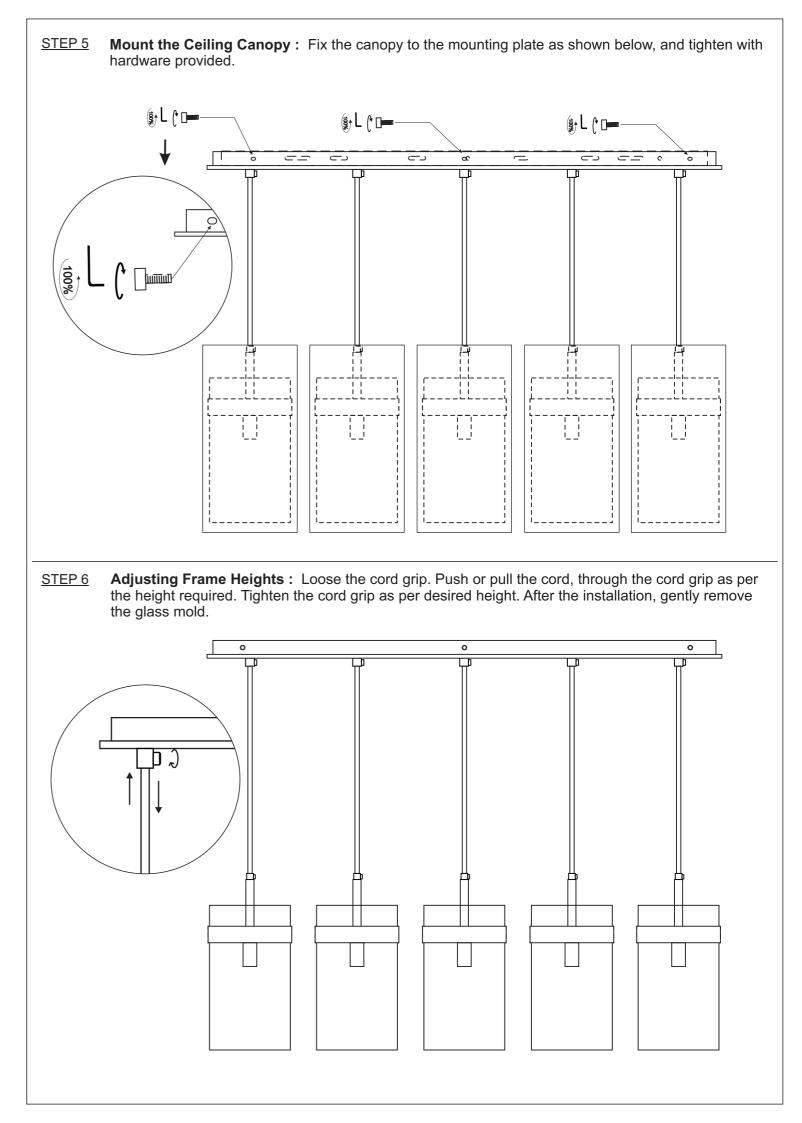

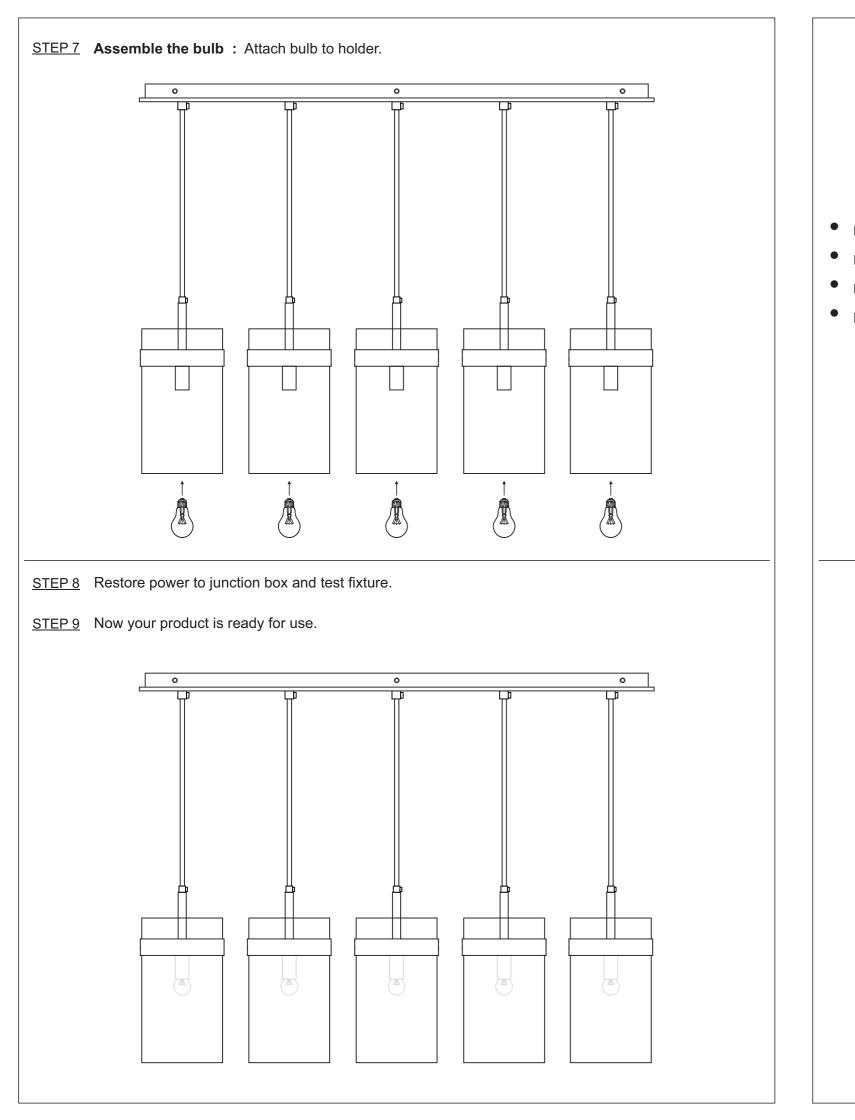

	CLEANING &
Dust regularly with a dry cloth. Do not use abrasive cleaners.	
Do not use chemical cleaners. Retain these instructions for reference	

