

BBK PERFORMANCE LLC  
3060 Performance Circle  
Deland, FL 32724

For any questions, email us:  
TECH@BBKPERFORMANCE.COM



## INSTALLATION INSTRUCTIONS - INS263

# THROTTLE BODY

Part # 1899 // 2016 - 2019 Chevy Camaro, Corvette 6.2L - 92mm



### Special Tools required:


Flat head screwdriver, 5mm allen wrench, 10mm socket, wrench and pliers.



**Install Time:** Approximately 1 hour.



**Difficulty:** Easy.

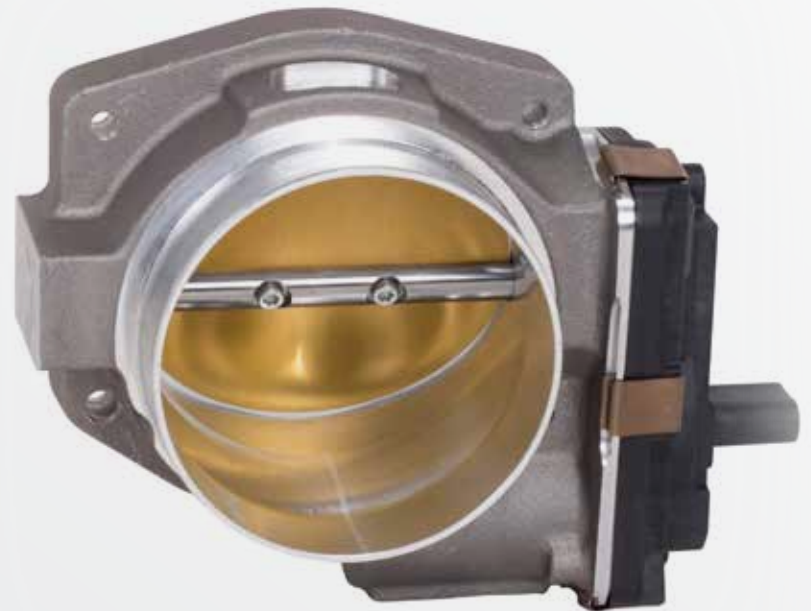

Please follow the ECU re-learn procedure on page 3 before driving on the road.

MADE IN U.S.A.

IMPORTANT: All appropriate safety equipment and gear must be used during the installation of this or any BBK Performance products or any time you work on a vehicle. BBK Performance accepts no responsibility for injuries or damage caused by or during the installation of this product.

UPDATED LAST: March 2019

FOLLOW THESE INSTRUCTIONS CAREFULLY TO ENSURE CORRECT FITMENT AND OPERATION

### STEP 1



Remove factory air box tube using pliers, screw driver, 10 mm socket and wrench.

### STEP 2



After removal of factory air-box check to make sure factory gasket is clean of debris.

### STEP 3



Now install BBK throttle body using supplied hardware and using 5mm wrench. Then reconnect plugs and factory air box back onto vehicle.

MADE IN U.S.A.

IMPORTANT: All appropriate safety equipment and gear must be used during the installation of this or any BBK Performance products or any time you work on a vehicle. BBK Performance accepts no responsibility for injuries or damage caused by or during the installation of this product.

UPDATED LAST: March 2019



FOLLOW THESE INSTRUCTIONS CAREFULLY TO ENSURE CORRECT FITMENT AND OPERATION

## ENGINE RELEARN PROCESS

Because your vehicles engine is electronically controlled by a computer, some control conditions are maintained by power from the battery. When the battery is disconnected or a new battery is installed, the engine must relearn its idle and fuel trim strategy for optimum drive ability and performance.

### STEP 1

With the vehicle at a complete stop, set the parking break

### STEP 2

Put the gearshift in P (Park) (automatic transmission or the neutral position (manual transmission), turn of all accessories and start the engine.

### STEP 3

Run the engine until it reaches normal operating temperature. Approximately 4-5 minutes.

### STEP 4

Allow the engine to idle for at least one minute.

### STEP 5

Turn the A/C on and allow the engine to idle for at least one minute.

### STEP 6

Drive the vehicle to complete the relearning process.

- The vehicle may need to be driven 10 miles or more to relearn the idle and fuel trim strategy.
- If you do not allow the engine to relearn its idle trim, the idle quality of your vehicle may be adversely affected until the idle trim is eventually re-learned.

 MADE IN U.S.A. 

IMPORTANT: All appropriate safety equipment and gear must be used during the installation of this or any BBK Performance products or any time you work on a vehicle. BBK Performance accepts no responsibility for injuries or damage caused by or during the installation of this product.

UPDATED LAST: March 2019

