


# TT MOUNT 3.0 - COMPUTER MOUNT

## STAY AERO. MOVE YOUR COMPUTER, NOT YOUR HEAD.


With the unique range of adjustability, the 76 Projects TT Mount allows the rider to maintain an aero position whilst viewing key data from their computer screen.

We recommend the mount be placed behind the hands whilst in riding position and angling the screen for optimum viewing. This will minimise head movement and helps to maintain concentration.

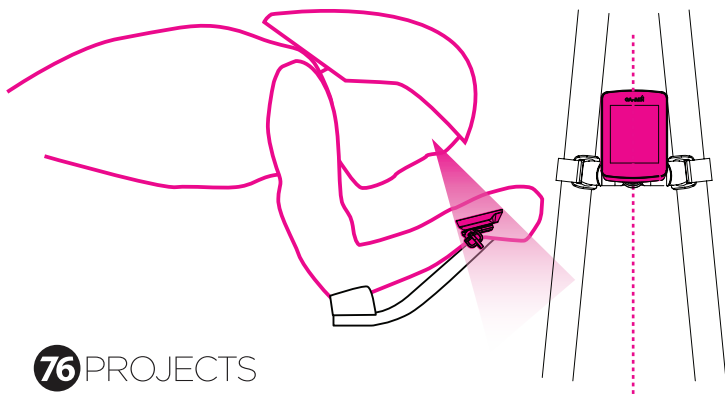

### 76 PROJECTS

- Aero position maintained
- Optimised viewing
- Perfect symmetry
- 3 way adjustability

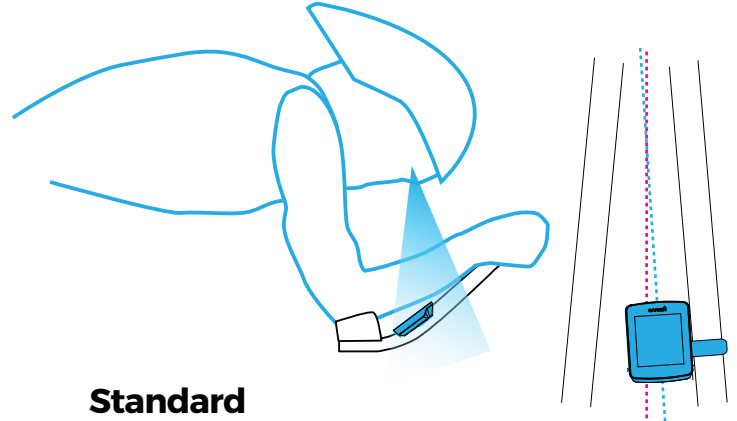

### Standard

- Negatively impacts aerodynamics (increased head movement)
- Limited ability for positioning

### CONTENTS




2x 25,30,35,40mm  
Screws

2x Angular spacers  
2x 2,3,5,10mm Spacers

Mount  
includes 20mm screws

### TOOLS REQUIRED



metric  
rule

2.5mm  
key




Forwards



Backwards




Low slung

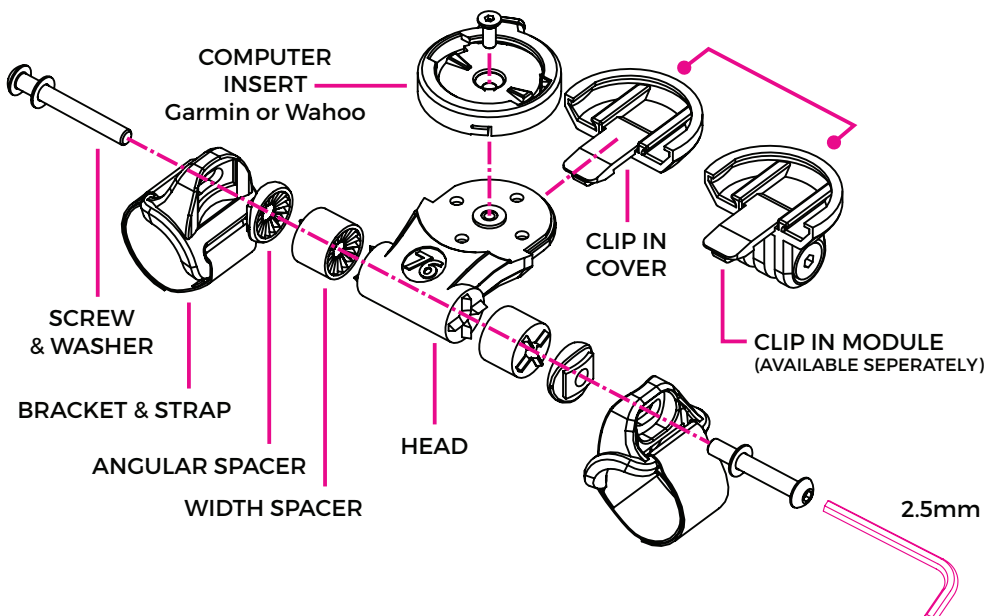

## STEP ONE


Attach Computer to mount, undo straps and choose approx position of mount for optimum viewing.

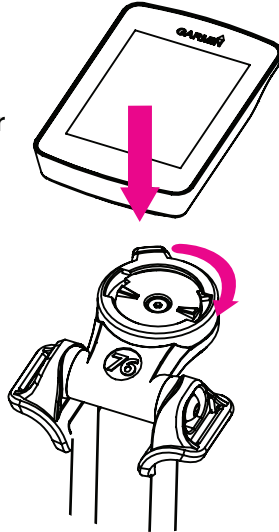

## STEP TWO

Mark position of bracket and measure width of bar centres.


Use guide to calculate screws and spacers required.

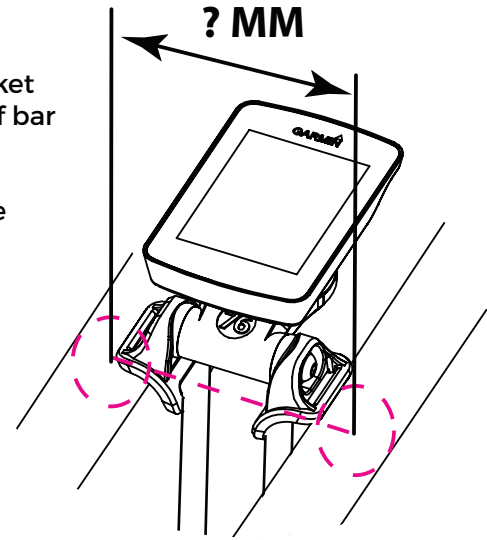

## STEP THREE

Using 2.5mm allen key replace both side screws and add spacers as required.

**Loosely** secure screws to allow brackets to freely rotate and move during next step.

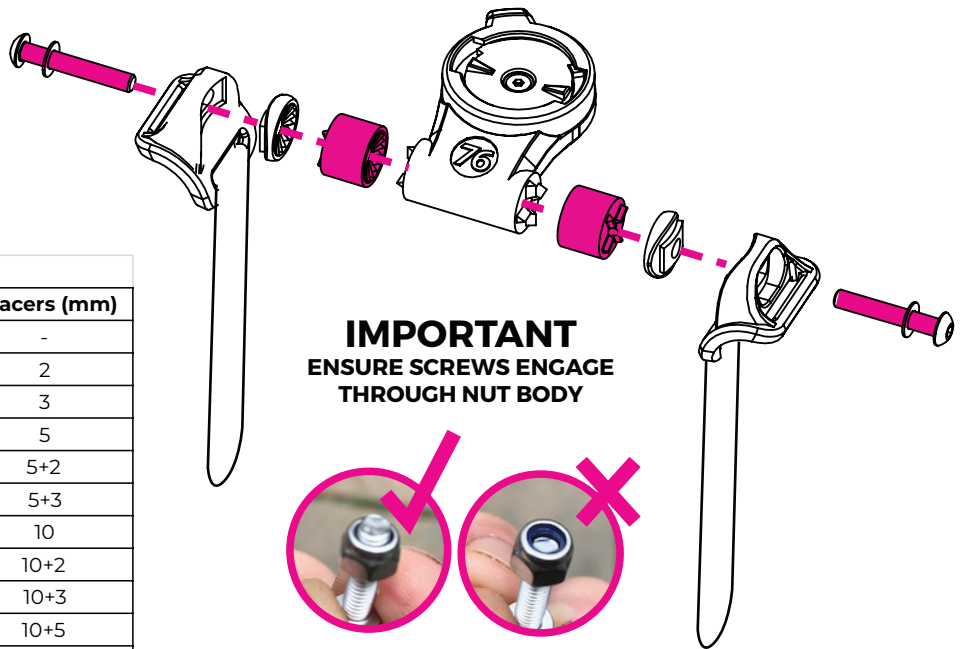


Standard C to C (mm)	Extra Wide C to C (mm)	Screws (mm)	Spacers (mm)
50	90	20	-
54	94	20	2
56	96	20	3
60	100	25	5
64	104	25	5+2
66	106	25	5+3
70	110	30	10
74	114	30	10+2
76	116	30	10+3
80	120	35	10+5
84	124	35	10+5+2
86	126	35	10+5+3
90	130	40	10+5+3+2

## STEP FOUR

Place mount into desired position, thread straps through each bracket.

Pull vertically to remove slack and smooth down velcro.

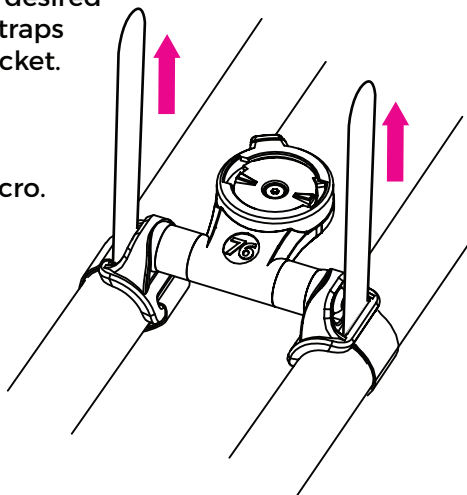

## STEP FIVE

Align head of mount to desired angle, tighten each screw finger tight or until resistance is felt.

Re adjust straps if necessary.

Excess straps may be cut for a neat finish.

