

Yamaha WR250R/WR250X Rally Shield Mounting Instructions




1) Remove the headlight assembly (2 bolts on the top and 2 pegs on the bottom) and unplug the headlight.



2) Remove the headlight from the cowling by unscrewing the headlight adjuster screws.



3) Use the provided hole pattern to mark all 4 mounting holes. Then use a 1/8" drill bit (not included) to drill the mounting holes.

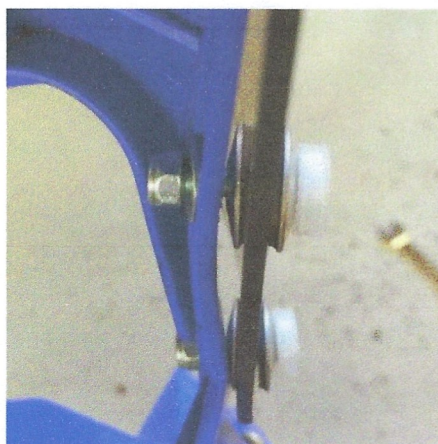

4) Use the provided hardware to attach the Rally shield. Try to tighten all 4 mounting screws evenly and be sure not to over tighten.



5) Reinstall the headlight into the cowling then install the headlight assembly back on the bike.



6) Use the provided black snap caps to cover the installation screw heads. Go ride your bike.