
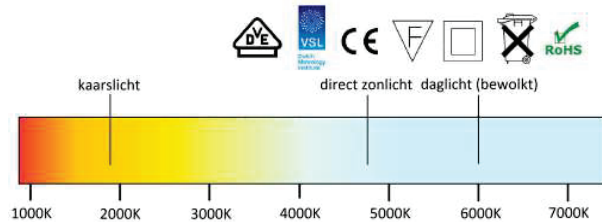



LED TRI PROOF ALUMINIUM

Specificaties

Lichtrendement	130-140 lm/W
Driver	Boke
LED	San'an SMD2835
Behuizing	Aluminium
	Standaard voorzien van doorvoerbedrading
Schakelingen	50.000
IP waarde	IP 66
Energietabel	A++

	60 cm	120 cm	150 cm
A	600 mm	1200 mm	1500 mm
B	94 mm	94 mm	94 mm
C	69 mm	69 mm	69 mm

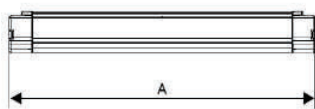

LED Tri Proof (Alu)

Omschrijving	Wattage	Lumen	Afmeting	Lichtkleur	Kelvin	Artikelnummer
LED Tri Proof lamp (Alu)	20 W	2200	60 cm	Neutraalwit	4000K	50902
LED Tri Proof lamp (Alu)	20 W	2200	60 cm	Daglicht	6000K	50903
LED Tri Proof lamp (Alu)	40 W	5200	120 cm	Neutraalwit	4000K	50939
LED Tri Proof lamp (Alu)	40 W	5200	120 cm	Daglicht	6000K	50940
LED Tri Proof lamp (Alu)	50 W	6500	150 cm	Neutraalwit	4000K	50942
LED Tri Proof lamp (Alu)	50 W	6500	150 cm	Daglicht	6000K	50943
LED Tri Proof lamp (Alu)	60 W	7800	150 cm	Neutraalwit	4000K	50945
LED Tri Proof lamp (Alu)	60 W	7800	150 cm	Daglicht	6000K	50946

Stralingshoek: **120°**
Hanghoogte: **tot 8 meter**
Power factor: **0,95>**
CRI: **80-85**
Temperatuur: **-25/+55**
Levensduur: **L80B10 50.000 uur**
Garantie: **5 jaar**

MACLEAN®

Wij ontvangen graag uw bestelling:
www.maclean.pro | info@maclean.pro | 076 - 565 65 65