

# L32 SUPER-STRENGTH GENERAL-PURPOSE SPRAY ADHESIVE













## ADHESIVE SOLUTIONS TO MAKE YOUR JOB EASIER, CLEANER & FASTER











Laminate

Sheet Metal

Melamine





Fiberglass/ Glass Reinforced Plastic

Bendy Board

#### **ADVANTAGES**

Fast Tack Low Odour High Initial Strength High Heat Resistance No Scuffing Required for Melamine to Melamine Toluene Free

#### TEMPERATURE RATING



120°C

### KEY APPLICATIONS

Melamine to Melamine (no sanding)
Laminate to Melamine, Board & Metal
Laminate Edging
Timber to Timber and Metal
Postforming
Marmoleum Bonding
Plastic Sheet Bonding
Sheet Metal to Board

NOT SUITABLE FOR: Polystyrene, some Plastics, Plasticised Vinyl and Polypropolene.


#### PROPERTIES.



Web Spray

COLOUR



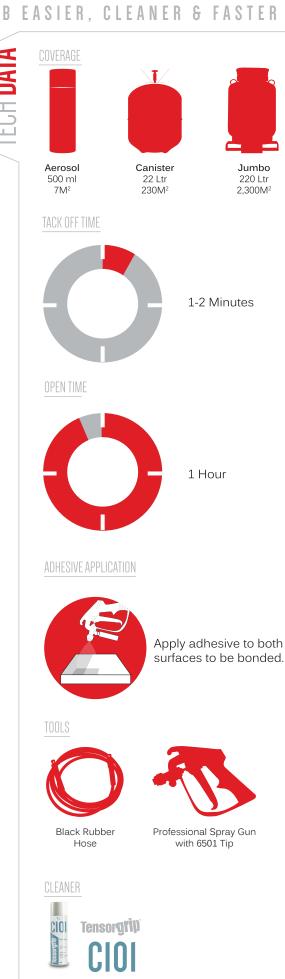

Open times and dry times may vary depending on weather conditions and humidity. Consult TDS for more information.