

# COLOLIGHT

# USER MANUAL

**LS168A** Cololight MIX  
& **LS168E** Cololight MIX Extension

簡中: 使用指南

JP: 取扱説明書

FR: MODE D'EMPLOI

IT: MANUALE UTENTE

CS: UŽIVATELSKÝ

SP: MANUAL DE USUARIO

PT: MANUAL DE INSTRUÇÕES

SV: ANVÄNDARMANUAL

DA: BRUGERMANUAL

HU: HASZNÁLATI UTASÍTÁS

AR: دليل المستخدم

# PRODUCT INSTRUCTION

---

Cololight MIX is an uplifting smart lighting system that continues to excite. The monoblock creates diverse and beautiful atmosphere, all the more so if extended with the extensions and future connectable parts. Besides various stunning light effects, it's also featured with music visualizer. With battery power supply and magnetic attraction, you can light up Cololight MIX anywhere.

# APP INSTRUCTION


---




- ① Scan QR code or input following URL in your mobile browser to download App.  
[http://www.ilifsmart.com/getapp\\_qlgp.html](http://www.ilifsmart.com/getapp_qlgp.html)
- ② Or you can visit the iOS App Store or Google Play and search for “Cololight”.
- ③ Pair up Cololight MIX with your mobile device according to the instruction on App.
- ④ Please check the FAQ in the Cololight App if you have any problems.

# CONTENTS (Cololight MIX/LS168A)


---



①




②




- ① Cololight MIX x 1
- ② User Manual x 1
- ③ 3M adhesive tape x 2
- ④ Connecting plate x 2
- ⑤ USB Type-C charging cable x 1

# CONTENTS (Cololight MIX Extension/LS168E)

---



①



②



- ① Cololight MIX Extension x 1
- ② User Manual x 1
- ③ 3M adhesive tape x 2
- ④ Connecting plate x 2

## **SPECIFICATIONS (Cololight MIX/LS168A)**

---


- ① Size (mm) : 128L x 128L x 30.6H
- ② Weight: 165g(Without Battery)
- ③ Communication protocol: Wi-Fi
- ④ Input: DC 5V/24V or Battery 18650
- ⑤ Operating temperature: -5~45°C
- ⑥ Operating humidity: 5~90%
- ⑦ Material: ABS+PC
- ⑧ Max power: 7.5W
- ⑨ Control mode: button/music/App Control
- ⑩ HUE: 16millions RGB

## **SPECIFICATIONS(Cololight Mix Extension/LS168E)**


---

- ① Size (mm) : 128L x 128L x 30.6H
- ② Weight: 150g
- ③ Input: DC 24V
- ④ Operating temperature: -5~45°C
- ⑤ Operating humidity: 5~90%
- ⑥ Material: ABS+PC
- ⑦ Max power: 7.5W
- ⑧ HUE: 16millions RGB


## 内容物 (MIX主灯/LS168A)



①




②




- ① 量子灯MIX x 1
- ② 指导手册 x 1
- ③ 3M胶带 x 2
- ④ 连接板 x 2
- ⑤ USB Type-C充电线 x 1

## 内容物 (MIX 拓展灯/LS168E)



①



②



- ① 量子灯MIX拓展灯 x 1
- ② 指导手册 x 1
- ③ 3M胶带 x 2
- ④ 连接板 x 2

## 参数(MIX 主灯/LS168A)

---


- ① 尺寸(mm): 128L x 128L x 30.6H
- ② 重量: 165g(电池重量不计入)
- ③ 无线协议: Wi-Fi
- ④ 输入电压: DC 5V/24V或18650电池一节
- ⑤ 工作温度: -5~45°C
- ⑥ 工作湿度: 5~90%
- ⑦ 材质: ABS+PC
- ⑧ 最大功率: 7.5W
- ⑨ 控制方式: 按键/听音变色/App 控制
- ⑩ 色彩种类: 1600万色 RGB

## 参数(Mix 拓展灯/LS168E)


---

- ① 尺寸(mm): 128L x 128L x 30.6H
- ② 重量: 150g
- ③ 输入电压: DC 24V
- ④ 工作温度: -5~45°C
- ⑤ 工作湿度: 5~90%
- ⑥ 材质: ABS+PC
- ⑦ 最大功率: 7.5W
- ⑧ 色彩种类: 1600万色 RGB


## 内容物 (Cololight MIX/LS168A)



①




②




- ① Cololight MIX x 1
- ② 取扱説明書 x 1
- ③ 3M粘着テープ x 2
- ④ 接続プレート x 2
- ⑤ USB Type-C充電ケーブル x 1

## 内容物 (Cololight MIX Extension/LS168E)



①



②



- ① Cololight MIX Extension x 1
- ② 取扱説明書 x 1
- ③ 3M粘着テープ x 2
- ④ 接続プレート x 2

## スペック (Cololight MIX/LS168A)

---

- ① サイズ (mm) : 128L×128L×30.6H
- ② 重さ: 165g (バッテリーなし)
- ③ 通信プロトコル: Wi-Fi
- ④ 入力電圧: DC 5V/24V または 18650 バッテリー
- ⑤ 作動温度: -5~45°C
- ⑥ 作動湿度: 5~90%
- ⑦ 材質: ABS+PC
- ⑧ 最大電力: 7.5W
- ⑨ 操作方法: ボタン/音声操作/アプリ操作
- ⑩ 色相: 1600万RGB


## スペック (Cololight Mix Extension/LS168E)

---


- ① サイズ (mm) : 128L×128L×30.6H
- ② 重さ: 150g
- ③ 入力電圧: DC 24V
- ④ 作動温度: -5~45°C
- ⑤ 作動湿度: 5~90%
- ⑥ 材質: ABS+PC
- ⑦ 最大電力: 7.5W
- ⑧ 色相: 1600万RGB




# TABLE DES MATIÈRES (Cololight MIX/LS168A)



①



②




③

④


⑤

- ① Cololight MIX x 1
- ② MODE D'EMPLOI x 1
- ③ Ruban adhésif 3M x 2
- ④ Plaque de connexion x 2
- ⑤ Câble de chargement USB de type-C x 1


# TABLE DES MATIÈRES (Cololight MIX Extension/LS168E)



①



②



③

④

- ① Cololight MIX Extension x 1
- ② MODE D'EMPLOI x 1
- ③ Ruban adhésif 3M x 2
- ④ Plaque de connexion x 2

## SPÉCIFICATIONS (Cololight MIX/LS168A)

---


- ① Dimension (mm) : 128 L x 128 L x 30,6 H
- ② Poids : 165 g (sans batterie)
- ③ Protocole de communication : Wi-Fi
- ④ Entrée : CC 5 V/24 V ou batterie 18650
- ⑤ Température de fonctionnement : -5~45 °C
- ⑥ Humidité de fonctionnement : 5~90 %
- ⑦ Matériau : ABS + PC
- ⑧ Puissance max. : 7,5 W
- ⑨ Mode de contrôle : bouton/musique/contrôle d'application
- ⑩ Teinte : 16 millions RVB

## SPÉCIFICATIONS (Cololight Mix Extension/LS168E)

---

- ① Dimension (mm) : 128 L x 128 L x 30,6 H
- ② Poids : 150 g
- ③ Entrée : CC 24 V
- ④ Température de fonctionnement : -5~45 °C
- ⑤ Humidité de fonctionnement : 5~90 %
- ⑥ Matériau : ABS + PC
- ⑦ Puissance max. : 7,5 W
- ⑧ Teinte : 16 millions RVB


# CONTENUTO (Cololight MIX/LS168A)



①



②




③

④


⑤

- ① Cololight MIX x 1
- ② MANUALE UTENTE x 1
- ③ Nastro adesivo 3M x 2
- ④ Piastra di collegamento x 2
- ⑤ Cavo di ricarica a USB e Tipo-C x 1


# CONTENUTO (Cololight MIX Extension/LS168E)



①



②



③

④

- ① Cololight MIX Extension x 1
- ② MANUALE UTENTE x 1
- ③ Nastro adesivo 3M x 2
- ④ Piastra di collegamento x 2

## SPECIFICHE (Cololight MIX/LS168A)

---


- ① Dimensione(mm): 128L x 128L x 30,6A
- ② Peso: 165g (Senza batteria)
- ③ Protocollo di comunicazione: Wi-Fi
- ④ Tensione di ingresso: 5V/24V DC o una batteria 18650
- ⑤ Temperatura di funzionamento: -5~45°C
- ⑥ Umidità di funzionamento: 5~90%
- ⑦ Materiale: ABS+PC
- ⑧ Potenza massima: 7,5W
- ⑨ Modalità di controllo: pulsante/musica/Controllo dall'App
- ⑩ Tonalità: 16 Milioni di colori RGB

## SPECIFICHE (Cololight Mix Extension/LS168E)


---

- ① Dimensione(mm): 128L x 128L x 30,6A
- ② Peso: 150g
- ③ Tensione di ingresso: 24V DC
- ④ Temperatura di funzionamento: -5~45°C
- ⑤ Umidità di funzionamento: 5~90%
- ⑥ Materiale: ABS+PC
- ⑦ Potenza massima: 7,5W
- ⑧ Tonalità: 16 Milioni di colori RGB


# CONTENIDOS (Cololight MIX/LS168A)



①



②




③

④


⑤

- ① Cololight MIX x 1
- ② MANUAL DE USUARIO x 1
- ③ Cinta adhesiva 3M x 2
- ④ Placa de conexión x 2
- ⑤ Cable de carga USB tipo-C x 1


# CONTENIDOS (Cololight MIX Extension/LS168E)



①



②



③

④

- ① Cololight MIX Extension x 1
- ② MANUAL DE USUARIO x 1
- ③ Cinta adhesiva 3M x 2
- ④ Placa de conexión x 2

## ESPECIFICACIÓN (Cololight MIX/LS168A)

---

- ① Tamaño (mm): 128 x 128 x 30,6 (longitud, anchura y altura)
- ② Peso: 165 g (sin batería)
- ③ Protocolo de comunicación: Wi-Fi
- ④ Entrada: CC 5V/24V o batería 18650
- ⑤ Temperatura de funcionamiento: entre -5°C y 45°C
- ⑥ Humedad de funcionamiento: entre 5 % y 90 %
- ⑦ Material: ABS+PC
- ⑧ Potencia máxima: 7,5W
- ⑨ Modo de control: botón/música/Control por App
- ⑩ TONO: 16 millones de RGB

## ESPECIFICACIÓN (Cololight Mix Extension/LS168E)

---

- ① Tamaño (mm): 128 x 128 x 30,6 (longitud, anchura y altura)
- ② Peso: 150 g (sin batería)
- ③ Entrada: CC 24V
- ④ Temperatura de funcionamiento: entre -5°C y 45°C
- ⑤ Humedad de funcionamiento: entre 5 % y 90 %
- ⑥ Material: ABS+PC
- ⑦ Potencia máxima: 7,5W
- ⑧ TONO: 16 millones de RGB



## ESPECIFICAÇÕES (Cololight MIX/LS168A)

---

- ① Tamanho (mm): 128L x 128L x 30,6A
- ② Peso: 165g (Sem Bateria)
- ③ Protocolo de comunicação: Wi-Fi
- ④ Entrada: DC 5V/24V ou Bateria 18650
- ⑤ Temperatura de funcionamento: -5°C - 45°C
- ⑥ Humidade de funcionamento: 5% - 90%
- ⑦ Material: ABS+PC
- ⑧ Potência Máx.: 7,5W
- ⑨ Modo de controlo: Controlo com botão/música/APP
- ⑩ HUE: RGB 16 milhões


## ESPECIFICAÇÕES (Cololight Mix Extension/LS168E)

---


- ① Tamanho (mm): 128L x 128L x 30,6A
- ② Peso: 150g
- ③ Entrada: DC 24V
- ④ Temperatura de funcionamento: -5°C - 45°C
- ⑤ Humidade de funcionamento: 5% - 90%
- ⑥ Material: ABS+PC
- ⑦ Potência Máx.: 7,5W
- ⑧ HUE: RGB 16 milhões




# INNEHÅLL (Cololight MIX/LS168A)



①



②




③

④


⑤

- ① Cololight MIX x 1
- ② ANVÄNDARMANUAL x 1
- ③ 3M häftande tejp x 2
- ④ Anslutningsplatta x 2
- ⑤ USB laddningskabel Typ C x 1


# INNEHÅLL (Cololight MIX Extension/LS168E)



①



②



③

④

- ① Cololight MIX Extension x 1
- ② ANVÄNDARMANUAL x 1
- ③ 3M häftande tejp x 2
- ④ Anslutningsplatta x 2

## SPECIFIKATION (Cololight MIX/LS168A)

---


- ① Storlek(mm): 128L × 128L × 30,6H
- ② Vikt: 165g (Utan batteri)
- ③ Kommunikationsprotokoll: Wi-Fi
- ④ Input: DC 5V/24V eller batteri 18650
- ⑤ Körningstemperatur: -5~45°C
- ⑥ Körningsfuktighet: 5~90%
- ⑦ Material: ABS+PC
- ⑧ Maxkraft: 7,5W
- ⑨ Kontrolläge: knapp/musik/Appkontroll
- ⑩ HUE: 16 miljoner RGB

## SPECIFIKATION (Cololight Mix Extension/LS168E)

---

- ① Storlek(mm): 128L × 128L × 30,6H
- ② Vikt: 150g
- ③ Input: DC 24V
- ④ Körningstemperatur: -5~45°C
- ⑤ Körningsfuktighet: 5~90%
- ⑥ Material: ABS+PC
- ⑦ Maxkraft: 7,5W
- ⑧ HUE: 16 miljoner RGB


# INDHOLD (Cololight MIX/LS168A)



①



②




③

④


⑤

- ① Cololight MIX x 1
- ② BRUGERMANUAL x 1
- ③ 3M klæbebånd x 2
- ④ Forbindelsesplade x 2
- ⑤ USB Type-C ladekabel x 1


# INDHOLD (Cololight MIX Extension/LS168E)



①



②



③

④

- ① Cololight MIX Extension x 1
- ② BRUGERMANUAL x 1
- ③ 3M klæbebånd x 2
- ④ Forbindelsesplade x 2

## SPECIFIKATION (Cololight MIX/LS168A)

---


- ① Størrelse(mm): 128L × 128L × 30,6H
- ② Vægt: 165g(uden batteri)
- ③ Kommunikationsprotokol: Wi-Fi
- ④ Input: DC 5V/24V eller batteri 18650
- ⑤ Driftstemperatur: -5~45°C
- ⑥ Driftsfugtighed: 5~90%
- ⑦ Materiale: ABS+PC
- ⑧ Maks. strøm: 7,5W
- ⑨ Kontrolmodus: knap/musik/applikationskontrol
- ⑩ HUE: 16millioner RGB

## SPECIFIKATION (Cololight Mix Extension/LS168E)


---

- ① Størrelse(mm): 128L × 128L × 30,6H
- ② Vægt: 150g
- ③ Input: DC 24V
- ④ Driftstemperatur: -5~45°C
- ⑤ Driftsfugtighed: 5~90%
- ⑥ Materiale: ABS+PC
- ⑦ Maks. strøm: 7,5W
- ⑧ HUE: 16millioner RGB


# OBSAH (Cololight MIX/LS168A)



①



②




③

④


⑤

- ① Cololight MIX x 1
- ② UŽIVATELSKÝ x 1
- ③ 3M samolepící páska x 2
- ④ Spojovací deska x 2
- ⑤ Nabíjecí kabel USB typu C x 1


# OBSAH (Cololight MIX Extension/LS168E)



①



②



③

④

- ① Cololight MIX Extension x 1
- ② UŽIVATELSKÝ x 1
- ③ 3M samolepící páska x 2
- ④ Spojovací deska x 2

## SPECIFIKACE (Cololight MIX/LS168A)

---


- ① Velikost (mm) : 128L x 128L x 30,6H
- ② Hmotnost: 165 g (bez baterie)
- ③ Komunikační protokol: Komunikační protokol: BLE/Wi-Fi
- ④ Vstupní signál: BLE: DC 5V/24V nebo baterie 18650
- ⑤ Provozní teplota: -5 ~ 45 °C
- ⑥ Provozní vlhkost: 5 ~ 90 %
- ⑦ Materiál: MATERIÁL: ABS + PC
- ⑧ Maximální výkon: 7,5 W
- ⑨ Režim ovládání: tlačítko/hudba/ovládání aplikací
- ⑩ HUE: 1,6 milionu RGB

## SPECIFIKACE (Cololight Mix Extension/LS168E)


---

- ① Velikost (mm) : 128L x 128L x 30,6H
- ② Hmotnost: 150 g
- ③ Vstupní signál: BLE: DC 24V
- ④ Provozní teplota: -5 ~ 45 °C
- ⑤ Provozní vlhkost: 5 ~ 90 %
- ⑥ Materiál: MATERIÁL: ABS + PC
- ⑦ Maximální výkon: 7,5 W
- ⑧ HUE: 1,6 milionu RGB


# TARTALOM (Cololight MIX/LS168A)



①



②




③

④

⑤

- ① Cololight MIX x 1
- ② HASZNÁLATI UTASÍTÁS x 1
- ③ 3M ragasztószalag x 2
- ④ Csatlakozó lemez x 2
- ⑤ C-típusú USB töltőkábel x 1


# TARTALOM (Cololight MIX Extension/LS168E)



①



②



③

④

- ① Cololight MIX Extension x 1
- ② HASZNÁLATI UTASÍTÁS x 1
- ③ 3M ragasztószalag x 2
- ④ Csatlakozó lemez x 2

## SPECIFIKÁCIÓ (Cololight MIX/LS168A)

---

- ① Méret (mm) : 128L x 128L x 30,6H
- ② Súly: 165g (Akkumulátor nélkül)
- ③ Kommunikációs protokoll: BLE/Wi-Fi
- ④ Bemenet: DC 5V/24V vagy 18650-es akkumulátor
- ⑤ Működési hőmérséklet: -5~45°C
- ⑥ Működési páratartalom: 5~90%
- ⑦ Alapanyag: ABS+PC
- ⑧ Maximális teljesítmény: 7,5 W
- ⑨ Vezérlési mód: gomb / zene / Alkalmazásvezérlés
- ⑩ HUE: 1,6millió RGB


## SPECIFIKÁCIÓ (Cololight Mix Extension/LS168E)

---

- ① Méret (mm) : 128L x 128L x 30,6H
- ② Súly: 150g
- ③ Bemenet: DC 24V
- ④ Működési hőmérséklet: -5~45°C
- ⑤ Működési páratartalom: 5~90%
- ⑥ Alapanyag: ABS+PC
- ⑦ Maximális teljesítmény: 7,5 W
- ⑧ HUE: 1,6millió RGB



# المحتويات (LS168A/Cololight MIX)

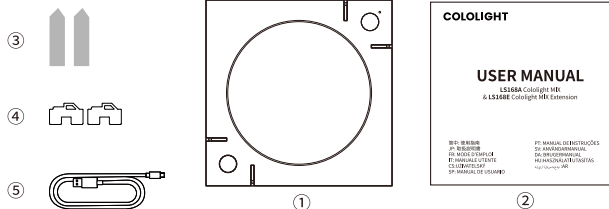

① 1 x Cololight MIX


② 1 x دليل المستخدم

③ 2 x شريط لاصق 3M

④ 2 x لوحة التوصيل

⑤ 1x كابل شحن تيب سي

# المحتويات (LS168E/Cololight MIX Extension)

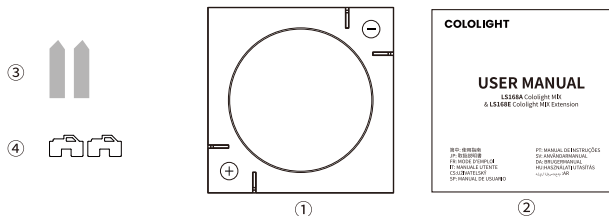

① 1 x Cololight MIX Extension

② 1 x دليل المستخدم

③ 2 x شريط لاصق 3M

④ 2 x لوحة التوصيل

## المواصفات (LS168A/Cololight MIX)

---

- ① مقياس (مم): 128 × طول × عرض × ارتفاع 30.6
- ② الوزن: 165 جرام (بدون البطارية)
- ③ بروتوكول الاتصال: واي فاي
- ④ إدخال الطاقة: 5 فولت/24 فولت DC أو بطارية 18650
- ⑤ درجة حرارة التشغيل: 5 ~ 45 درجة مئوية
- ⑥ درجة رطوبة التشغيل: 5 ~ 90%
- ⑦ الخامات: ABS+PC
- ⑧ الطاقة القصوى: 7.5 واط
- ⑨ وضع التحكم: زر/موسيقى/تحكم عبر التطبيق
- ⑩ دعم الالوان: 16 مليون لون RGB

## المواصفات (LS168E/Cololight Mix Extension)

---

- ① مقياس (مم): 128 × طول × عرض × ارتفاع 30.6
- ② الوزن: 150 جرام
- ③ إدخال الطاقة: 5 فولت/24 فول DC
- ④ درجة حرارة التشغيل: 5 ~ 45 درجة مئوية
- ⑤ درجة رطوبة التشغيل: 5 ~ 90%
- ⑥ الخامات: ABS+PC
- ⑦ الطاقة القصوى: 7.5 واط
- ⑧ دعم الالوان: 16 مليون لون RGB

# HAZARDOUS SUBSTANCE TABLE

---

Part Name		Grey Plastic Shell	Code Label	IC Body
Harmful Substance	(Cd)	○	○	○
	(Pb)	○	○	○
	(Hg)	○	○	○
	(Cr)	○	○	○
	(Br)	○	○	○

This table is made according to IEC 62321 test standard

○ Expresses that this hazardous substance in all homogeneous materials of this part is within limit range.

× Express that this hazardous substance in at least one homogeneous material of this part is above limit

# FCC STATEMENT

---

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

- 1) This device may not cause harmful interference.
- 2) This device must accept any interference received, including interference that may cause undesired operation.

**Note:** The grantee is not responsible for any changes or modifications not expressly approved by the party responsible for compliance. Such modifications could void the user's authority to operate the equipment.

**Note:** This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation.

This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- 1) Reorient or relocate the receiving antenna.
- 2) Increase the separation between the equipment and receiver.
- 3) Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- 4) Consult the dealer or an experienced radio/TV technician for help.

## RF EXPOSURE STATEMENT

This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with minimum distance of 20 cm between the radiator and your body.

# CE & WEEE STATEMENT

---

## DECLARATION OF CONFORMITY

Hereby, LifeSmart declares that the radio equipment type Cololight is in compliance with Directive 2014/53/EU. The full text of the EU declaration of conformity is available at the following internet address:

<http://global.ilifsmart.com/ce/docs/>



**Notice: This device may be used in each member state in EU.**

## WEEE Directive Compliance

Device labelled with this symbol should not be disposed with other household wastes. It shall be handed over to the applicable collection point for the recycling of waste electrical and electronic equipment.



# WARNING

---



This product contains small parts that can cause danger if swallowed by children.  
This product is not suitable for children under the age of 3.  
Children under the age of 14 must use this product under parental supervision.

# WARRANTY & SUPPORT

---

Thank you for purchasing this LifeSmart product. In order to protect your rights, please read the following content carefully: The warranty period of our company's products is one year from the date of purchase or longer if local laws impose a longer minimum term, in which case the minimum term is the warranty period. During the warranty period, any faults caused by the product itself or for quality problems that arise under normal usage, LifeSmart will provide a free replacement.

## **The following conditions are not covered by the warranty:**

- ① Product failure or damage caused by installation, use, and maintenance that is not in accordance with the product instructions;
- ② Products beyond the warranty period;
- ③ Products that have the barcode tampered with or removed;
- ④ Devices that have been tampered with or customized outside of LifeSmart Terms of Service as on the LifeSmart App and website;
- ⑤ User-caused damage, such as inappropriate voltage input, high temperature, accidental spillage, physical damage, etc;
- ⑥ Product failure or damage caused by force majeure such as earthquakes, fires, or floods;
- ⑦ Product failure or damage caused by other problems except the product itself.

**User support e-mail address: [support@ilifsmart.com](mailto:support@ilifsmart.com)**

# DECLARATION

---

Cololight is a trademark of Hangzhou LifeSmart Technology Co., Ltd. As for the trademarks, product logos and product names from other companies presented within this manual, they are possessed by their own right holders. Without our written permission, no entity or individual shall extract, copy or disseminate in part or the whole of the manual contents in any form. Due to product version upgrades or other reasons, content of this manual may change. Our company reserves the right to change the contents of this manual without any notice.

This manual is used only for instructional purposes. We strive to provide accurate information in this manual, but we are not able to ensure that the content of this manual is current. Statements, information and advice in this manual do not constitute any expressed or implied assurance. Updated manuals are available on our website at [iot.ilifesmart.com](http://iot.ilifesmart.com) or by contacting our team.



Manufacturer: Hangzhou LifeSmart Technology Co., Ltd.  
Address: 22th Floor, Yuesheng International Center, 518 Pinglan Road, Xiaoshan District, Hangzhou, Zhejiang, China