



FRAG0781

THIS RECIPE WILL WORK FOR THE OLD MOD, THE LAST BATCH NUMBER FOR THE OLD MOD IS 176155.  
FOR LATER BATCH NUMBERS PLEASE DOWNLOAD THE RECIPE FOR THE NEW MOD.

**RECIPE - 20CL**  
**THAI LIME & MANGO IN CS1**

# CANDLE SHACK

## DESCRIPTION



## INGREDIENTS FOR EACH CANDLE

|  |
|--|
| <a href="#">1x 20cl glass jar</a>                      |
| <a href="#">11.55g Thai Lime and Mango</a>             |
| <a href="#">153.45g Candle Shack Container Wax CS1</a> |
| <a href="#">1x LX10 Wick</a>                           |
| <a href="#">1x 15mm Adhesive Wick Pad</a>              |
| <a href="#">1x WickClaw Tool for 20cl Glass</a>        |

## WAX

Candle Shack's CS1 Container Wax is blended from mineral and rapeseed oil. It is optimised for scent throw and maintains excellent hot and cold throw while using less fragrance. This vegan-friendly container wax also has a beautiful white texture and unmatched stability, making it popular with our luxury clients.

## VESSEL

Our Lotti 20cl glass is manufactured in Italy and meets the highest standards of clarity and tolerance.  
Height: 84mm  
Diameter: 70.5mm  
Internal height: 66mm

## WICK

One of Wedo's simplest and most popular wicks - the LX10 is pure cotton with no core. All wicks are 110mm long with a thin paraffin wax coating for stability.

## USAGE RECOMMENDATIONS

- We recommend heating CS1 to 75°C to melt.
- Add fragrance at 70°C and stir for 60 seconds.
- The mixture is ready to pour at 65°C into warmed glasses.
- If the top is uneven once set, you can flash the surface with a heat gun, or do a top up pour to get a clean finish.
- Leave the candle to cure for 2+ days for best results.

## DISCLAIMER

Each report shows test results for a set of candles made by Candle Shack's R&D team for that particular recipe. The test reports are not a guarantee that all candles made to the recipe will burn in exactly the same way. Variables such as ambient temperature, air flow, or the manufacturing process can affect the burning profile of a candle, so it is recommended that candle makers conduct their own testing to ensure that they are satisfied with the performance of their product.

Technical report on a test set of candles made in Candle Shack R&D department for sooting behaviour testing and fire safety testing

Date of Report: 08/10/21

Testing Period: 20/08/2021 to 28/08/2021

|                  |  |                    |         |
|------------------|--|--------------------|---------|
| Sample Ref       | CS0297U-2                                | No. of Samples     | 3       |
| Candle Name      | 20cl Thai Lime & Mango Candle, 7% in CS1 |                    |         |
| Description      | 165g Paraffin Wax Fragranced Candle      |                    |         |
| Fragrance        | Thai Lime & Mango                        | Weight per candle  | 11.55g  |
| Wax              | Candle Shack Container Wax CS1           | Weight per candle  | 153.45g |
| Colour           | White                                    | Height             | 84mm    |
| Wick Type        | LX10                                     | Top Diameter (ext) | 70mm    |
| Wick Positioning | Centred                                  | Top Diameter (int) | 65mm    |
| Surface Defects  | None                                     | Base Diameter      | 67mm    |

## TECHNICAL REPORT

### Part 1: SPECIFICATION FOR SOOTING BEHAVIOUR

To evaluate the performance of a test set of candles in a controlled environment against the requirements of **BS EN 15426:2018** (Candles. Specification for sooting behaviour)

### Part 2: SPECIFICATION FOR FIRE SAFETY

To evaluate the performance of a test set of candles in a controlled environment against the requirements of **BS EN 15493:2019** (Candles. Specification for fire safety)

## Part 1: SPECIFICATION FOR SOOTING BEHAVIOUR

### Requirement

When tested in accordance with clause 9 of EN 15426:2018, the average soot index per hour from three tests (samples) shall be less than 1.0/h

The room temperature during testing was  $20 \pm 5^\circ\text{C}$

Wicks were trimmed to 5mm before lighting.

Cycles: 2 x  $240 \pm 5$  min cycles with >60min pause between cycles)

Soot testing was performed in wire mesh cylinder Type 1 (Diameter:  $230 \pm 10$  mm)

| Sample Ref. | Total burn time<br>$t_m$ (h) | Hourly soot index<br>$Si_h$ | Average soot index per hour<br>$Si_h$ | Result |
|-------------|------------------------------|-----------------------------|---------------------------------------|--------|
| CS0297U-1   | 8.33                         | 0.08                        | 0.06                                  | PASS   |
| CS0297U-2   | 8.33                         | 0.03                        |                                       |        |
| CS0297U-3   | 8.33                         | 0.06                        |                                       |        |

# CANDLE SHACK

Candle Shack Ltd  
 Unit A, West Carron Works  
 Stenhouse Rd  
 Carron  
 Stirlingshire  
 FK2 8DR

## Part 2: SPECIFICATION FOR FIRE SAFETY

| Test Property                 | Test Method                        | Requirements   | Result                 |
|-------------------------------|------------------------------------|--|------------------------|
| Stability                     | EN 15493:2019 4.1 (Visual Check)   | Candle should not tip over when placed on a 10° incline plane  | PASS                   |
| Secondary Ignition            | EN 15493:2019 4.2 (Visual Check)   | No secondary ignition shall occur for more than 10 s   | PASS                   |
| Flame Height                  | EN 15493:2019 4.3 (Measurement)    | The flame height for all candle types, except for tea lights, shall not exceed 75mm. The flame height for tea lights shall not exceed 30mm | PASS<br>Maximum: 20 mm |
| Behaviour after extinguishing | EN 15493:2019 4.5.1 (Visual Check) | After extinguishing the candle shall not spontaneously re-light  | PASS                   |
|                               | EN 15493:2019 4.5.2 (Measurement)  | The wick shall not continue to glow or smoke for an average time of more than 30 s after extinguishing                                     | PASS<br>Average: 6 s   |
| Container Candles             | EN 15493:2019 4.6 (Visual Check)   | The container shall not crack or break at any time throughout the burning test   | PASS                   |

The room temperature during testing was 20±5°C  
 Wicks were trimmed to 5mm before lighting.

Candle Performance (240 ± 5 min cycles with >60min pause between cycles)

| Sample Ref. | Gross Weight (g) | Total Wax Consumed (g) | *Total Burning Time (h) | Wax Consumption Rate (g/h) |
|-------------|------------------|------------------------|-------------------------|----------------------------|
| CS0297U-1   | 386.4            | 153.4                  | 52.5                    | 2.92                       |
| CS0297U-2   | 386.3            | 145.2                  | 52.5                    | 2.77                       |
| CS0297U-3   | 387.6            | 152.9                  | 56.5                    | 2.71                       |



\*If a candle self-extinguishes during the final burn cycle, the time of self-extinguishing is estimated

### Notes and Discussion:

# CANDLE SHACK

Candle Shack Ltd  
 Unit A, West Carron Works  
 Stenhouse Rd  
 Carron  
 Stirlingshire  
 FK2 8DR


## CHARTS

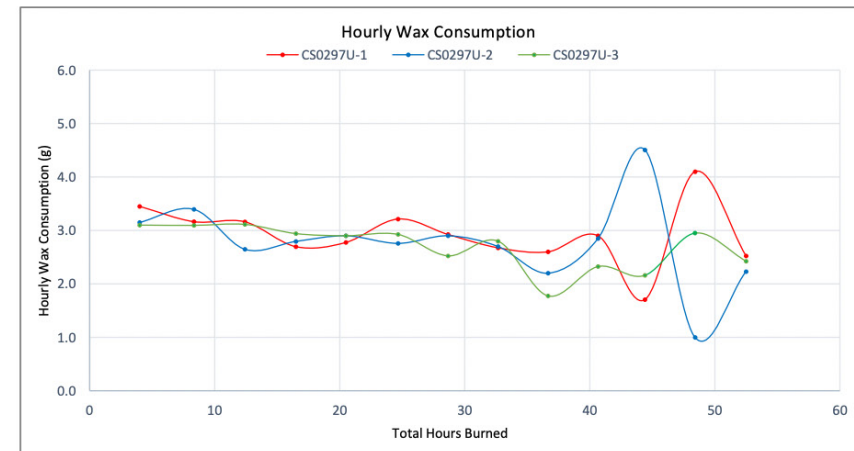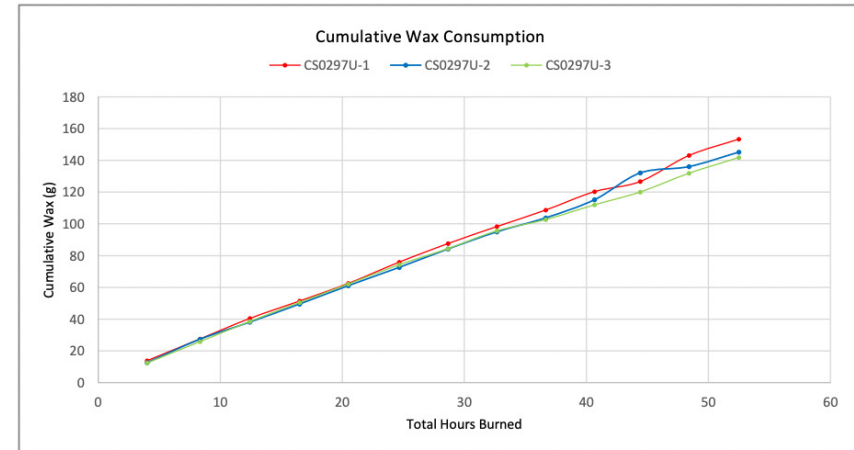


# CANDLE SHACK

Candle Shack Ltd  
Unit A, West Carron Works  
Stenhouse Rd  
Carron  
Stirlingshire  
FK2 8DR


## IMAGE GALLERY



End of Burn Front- Sample 1



End of Burn Front- Sample 2



End of Burn Front- Sample 3



End of Burn Top - Sample 1



End of Burn Top - Sample 2



End of Burn Top - Sample 3

## END OF REPORT

David Barn  
Head of R&D