WWW.CANDLE-SHACK.CO.UK

FRAG0702

RECIPE - 9CL FRESH LINEN IN CS1



CANDLE SHACK

DESCRIPTION

FRESH LINEN

TOP NOTES - CITRUS, GALBANUM HEART NOTES - VIOLET, ORANGE BLOSSOM, LILY, JASMINE BASE NOTES - WOODS, AMBER, MUSK

INGREDIENTS FOR EACH CANDLE

<u>1x 9cl glass jar</u>

5.25g of Fresh Linen Fragrance Oil

69.75g Candle Shack Ecosystem CS1 Wax

1x LX8 Wick

1x15mm Adhesive Wick Pad

1x WickClaw Tool for 9cl Glass

WAX

Candle Shack's CS1 Container Wax is blended from mineral and rapeseed oil. It is optimised for scent throw and maintains excellent hot and cold throw while using less fragrance. This vegan-friendly container wax also has a beautiful white texture and unmatched stability, making it popular with our luxury clients.

VESSEL

Our Lauren 9cl Votive glass is manufactured in Italy and meets the highest standards of clarity and tolerance. Height: 67mm Diameter: 56mm Internal height: 57mm

WICK

The Wedo LX candle wick series is one of Wedo's simplest and most popular wicks. Suitable for paraffin container candles, votives and pillar candles, the LX wicks are made of cotton and are without cores. All wicks are 110mm long with a thin paraffin wax coating for stability.

USAGE RECOMMENDATIONS

- We recommend heating CS1 to 75°C to melt.
- Add the fragrance at 70°C and stir for 60 seconds.
- Warm your glasses by putting them in a 40° C oven for 5 to 10 minutes.
- The mixture is ready to pour at 65°C into warmed glasses.
- If the top is uneven once set, you can flash the surface with a heat gun or do a top-up pour to get a clean finish.
- Leave the candle to cure for at least 2 days for the best results.

DISCLAIMER

Each report shows test results for a set of candles made by Candle Shack's R&D team for that particular recipe. The test reports are not a guarantee that all candles made to the recipe will burn in exactly the same way. Variables such as ambient temperature, air flow, or the manufacturing process can affect the burning profile of a candle, so it is recommended that candle makers conduct their own testing to ensure that they are satisfied with the performance of their product.



Candle Shack Ltd Unit A, West Carron Works Stenhouse Rd Carron Stirlingshire FK2 8DR

Technical report on a test set of candles made in Candle Shack R&D department for sooting behaviour testing and fire safety testing

Date of Report: 23/09/21

Testing Period: 29/08/2021 - 30/08/2021

Sample Ref	CS0298L-1	No. of Samples	3		
Candle Name	9cl Fresh Linen Candle, 7% in CS1				
Description	75g Paraffin Wax Fragranced Candle				
Fragrance	Fresh Linen	Weight per candle	5.25g		
Wax	Candle Shack Ecosystem CS1	Weight per candle	69.75g		
Colour	White	Height	67mm		
Wick Type	LX8	Top Diameter (ext)	56mm		
Wick Positioning	Centred	Top Diameter (int)	51mm		
Surface Defects	None	Base Diameter	50mm		

TECHNICAL REPORT

Part 1: SPECIFICATION FOR SOOTING BEHAVIOUR

To evaluate the performance of a test set of candles in a controlled environment against the requirements of **BS EN 15426:2018** (Candles. Specification for sooting behaviour)

Part 2: SPECIFICATION FOR FIRE SAFETY

To evaluate the performance of a test set of candles in a controlled environment against the requirements of **BS EN 15493:2019** (Candles. Specification for fire safety)



Candle Shack Ltd Unit A, West Carron Works Stenhouse Rd Carron Stirlingshire FK2 8DR

Part 1: SPECIFICATION FOR SOOTING BEHAVIOUR

Requirement

When tested in accordance with clause 9 of EN 15426:2018, the average soot index per hour from three tests (samples) shall be less than 1.0/h

The room temperature during testing was $20\pm5^{\circ}$ C Wicks were trimmed to 5mm before lighting. Cycles: 2 x 240 ± 5 min cycles with >60min pause between cycles) Soot testing was performed in wire mesh cylinder Type 1 (Diameter: 230 ± 10 mm)

Sample Ref.	Total burn time t _m (h)	Hourly soot index Si _h	Average soot index per hour Si _h	Result
CS0298L-1	8.00	0.03		
CS0298L-2	8.00	-0.06	0.02	PASS
CS0298L-3	8.00	0.09		



Candle Shack Ltd Unit A, West Carron Works Stenhouse Rd Carron Stirlingshire FK2 8DR

Part 2: SPECIFICATION FOR FIRE SAFETY

Test Property	Test Method	Requirements	Result
Stability	EN 15493:2019 4.1 (Visual Check)	Candle should not tip over when placed on a 10° incline plane	PASS
Secondary Ignition	EN 15493:2019 4.2 (Visual Check)	No secondary ignition shall occur for more than 10 s	PASS
Flame Height	EN 15493:2019 4.3 (Measurement)	The flame height for all candle types, except for tea lights, shall not exceed 75mm. The flame height for tea lights	PASS
	(shall not exceed 30mm	Maximum: 15 mm
Behaviour after extinguishing	EN 15493:2019 4.5.1 (Visual Check)	After extinguishing the candle shall not spontaneously re-light	PASS
	EN 15493:2019 4.5.2 (Measurement)	The wick shall not continue to glow or smoke for an average time of more than 30 s after extinguishing	PASS
			Average: 3 s
Container Candles	EN 15493:2019 4.6 (Visual Check)	The container shall not crack or break at any time throughout the burning test	PASS

The room temperature during testing was $20\pm5^{\circ}C$ Wicks were trimmed to 5mm before lighting.

Candle Performance (240 ± 5 min cycles with >60min pause between cycles)

Sample Ref.	Gross Weight (g)	Total Wax	*Total Burning	Wax Consumption
Sample Rei.		Consumed (g)	Time (h)	Rate (g/h)
CS0298L-1	198.5	71.2	32.2	2.21
CS0298L-2	200.2	66.4	32.2	2.06
CS0298L-3	200.8	70.2	32.2	2.18

*If a candle self-extinguishes during the final burn cycle, the time of self-extinguishing is estimated


Notes and Discussion:


L		



Candle Shack Ltd Unit A, West Carron Works Stenhouse Rd Carron Stirlingshire FK2 8DR

CHARTS

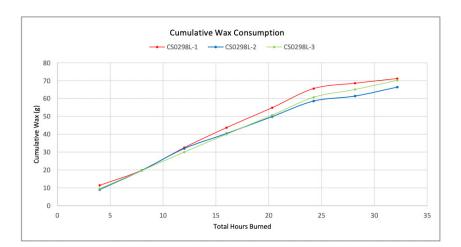

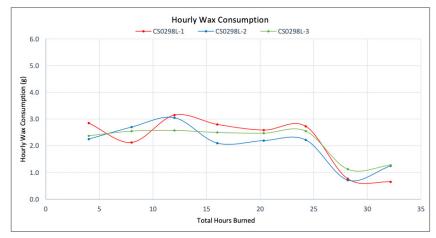

Page 4 of 5



DRI

David Barn Head of R&D

Page 5 of 5