

RECIPE - 30CL
PARADISE BEACH IN RS1

## CANDLE

#### DESCRIPTION

# PARADISE BEACH TOP NOTES - BERGAMOT, OZONIC HEART NOTES - LILY, FRESH OCEAN AIR BASE NOTES - SWEET VANILLA, POWDERED MUSK, COCONUT

#### INGREDIENTS FOR EACH CANDLE

1x 30cl glass jar

22.0g of Paradise Beach

198.0g Candle Shack Ecosystem RS1

1x CL14 Wick

1x 15mm Adhesive Wick Pad

1x WickClaw Tool for 30cl Glass

#### WAX

Candle Shack's EcoSystem RS1 Wax is a natural wax blend made from rapeseed and soy oils. Developed exclusively for Candle Shack, this professional-grade wax is easy to use by novice and seasoned chandler alike and is particularly popular with our luxury clients. This plant wax is also easy to wick and offers good scent throw with compatible fragrances.

#### **VESSEL**

Our Lotti 30cl glass is manufactured in Italy and meets the highest standards of clarity and tolerance.

Height: 90mm
Diameter: 78mm
Internal height: 75mm

#### **WICK**

Crafted from unbleached cotton and interwoven with a linen thread, CL candles wicks are innovative flat wicks designed to minimise afterglow and smoking while maintaining rigidity. All wicks are 110mm long with a thin paraffin coating for stability.

#### **USAGE RECOMMENDATIONS**

- We recommend heating RS1 to a maximum of 75°C (slowly to prevent damaging the wax).
- Add the fragrance at 63°C and stir for 60 seconds.
- The mixture is ready to pour at 60°C into glasses at room temperature.
- If the top is uneven once set, you can flash the surface with a heat gun or do a top-up pour to get a clean finish.
- Leave the candle to cure for at least 2 days for the best results.

#### DISCLAIMER

Each report shows test results for a set of candles made by Candle Shack's R&D team for that particular recipe. The test reports are not a guarantee that all candles made to the recipe will burn in exactly the same way. Variables such as ambient temperature, air flow, or the manufacturing process can affect the burning profile of a candle, so it is recommended that candle makers conduct their own testing to ensure that they are satisfied with the performance of their product



Candle Shack Ltd Unit A, West Carron Works Stenhouse Rd Carron Stirlingshire FK2 8DR

Technical report on a test set of candles made in Candle Shack R&D department for sooting behaviour testing and fire safety testing

Date of Report: 08/10/21 Testing Period: 09/09/2021 to 17/09/2021

Sample Ref	CS0262T-1	No. of Samples	3		
Candle Name	30cl Paradise Beach Candle, 10% in RS1				
Description	220g Rapeseed Container Blend Wax Fragranced Candle				
Fragrance	Paradise Beach		Weight per candle	22.0g	
Wax	Candle Shack Ecosystem RS1		Weight per candle	198.0g	
Colour	White	Height	92mm		
Wick Type	CL14	Top Diameter (ext)	82mm		
Wick Positioning	Centred	Top Diameter (int)	76mm		
Surface Defects	None	Base Diameter	76mm		

#### TECHNICAL REPORT

#### Part 1: SPECIFICATION FOR SOOTING BEHAVIOUR

To evaluate the performance of a test set of candles in a controlled environment against the requirements of **BS EN 15426:2018** (Candles. Specification for sooting behaviour)

#### Part 2: SPECIFICATION FOR FIRE SAFETY

To evaluate the performance of a test set of candles in a controlled environment against the requirements of **BS EN 15493:2019** (Candles. Specification for fire safety)

Page 1 of 5



Candle Shack Ltd Unit A, West Carron Works Stenhouse Rd Carron Stirlingshire FK2 8DR

#### Part 1: SPECIFICATION FOR SOOTING BEHAVIOUR

#### Requirement

When tested in accordance with clause 9 of EN 15426:2018, the average soot index per hour from three tests (samples) shall be less than 1.0/h

The room temperature during testing was 20±5°C

Wicks were trimmed to 5mm before lighting.

Cycles: 3 x 240 ± 5 min cycles with >60min pause between cycles)

Soot testing was performed in wire mesh cylinder Type 2 (Diameter: 300 ± 10 mm)

Sample Ref.	Total burn time t <sub>m</sub> (h)	Hourly soot index Si <sub>h</sub>	Average soot index per hour Si <sub>h</sub>	Result
CS0262T-1	12.00	0.14		
CS0262T-2	12.00	0.14	0.53	PASS
CS0262T-3	12.00	1.31		

## **CANDLE** SHACK

Candle Shack Ltd Unit A, West Carron Works Stenhouse Rd Carron Stirlingshire FK2 8DR

#### Part 2: SPECIFICATION FOR FIRE SAFETY

Test Property	Test Method	Requirements	Result
Stability	EN 15493:2019 4.1 (Visual Check)	Candle should not tip over when placed on a 10° incline plane	PASS
Secondary Ignition	EN 15493:2019 4.2 (Visual Check)	No secondary ignition shall occur for more than 10 s	PASS
Flame Height	EN 15493:2019 4.3 (Measurement)	The flame height for all candle types, except for tea lights, shall not exceed 75mm. The flame height for tea lights	PASS
	(,	shall not exceed 30mm	Maximum: 30 mm
	EN 15493:2019 4.5.1 (Visual Check)	After extinguishing the candle shall not spontaneously re-light	PASS
Behaviour after extinguishing	EN 15493:2019 4.5.2 (Measurement)	The wick shall not continue to glow or smoke for an average time of more than 30 s after extinguishing	PASS
	3		Average: 6 s
Container Candles	EN 15493:2019 4.6 (Visual Check)	The container shall not crack or break at any time throughout the burning test	PASS

The room temperature during testing was 20±5°C Wicks were trimmed to 5mm before lighting.

Candle Performance (240 ± 5 min cycles with >60min pause between cycles)

Sample Ref.	Gross Weight (g)	Total Wax Consumed (g)	*Total Burning Time (h)	Wax Consumption Rate (g/h)
CS0262T-1	541.5	207.2	57.8	3.58
CS0262T-2	537.89	200.1	57.8	3.46
CS0262T-3	542.8	206.0	57.8	3.56

<sup>\*</sup>If a candle self-extinguishes during the final burn cycle, the time of self-extinguishing is estimated.


## Notes and Discussion:


Page 3 of 5



Candle Shack Ltd Unit A, West Carron Works Stenhouse Rd Carron Stirlingshire FK2 8DR

#### CHARTS

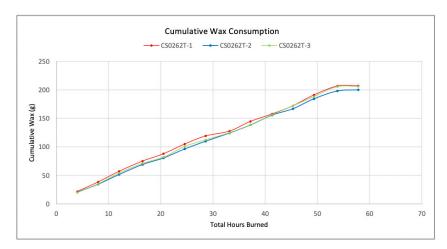

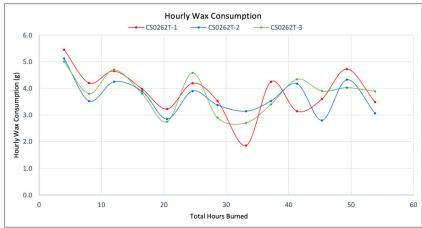

Page 4 of 5

### CANDLE SHACK

Candle Shack Ltd Unit A, West Carron Works Stenhouse Rd Carron Stirlingshire FK2 8DR

#### **IMAGE GALLERY**







End of Burn Front - Sample 2



End of Burn Front - Sample 3



End of Burn Top - Sample 1



End of Burn Top - Sample 2



End of Burn Top - Sample 3

#### **END OF REPORT**

DRJam

David Barn Head of R&D