

CONTENTS

IDEA GALLERY 4-12

PAVERS

Tumbled Pavers

| | |
|--------------------------------------|-------|
| Old World Holland 4x8 | 14-15 |
| Old World Vintage | 16-19 |
| Old World Vintage Patterns | 20-21 |

Contemporary Pavers

| | |
|---|-------|
| Harbor Stone | 22-24 |
| Harbor Stone & Bay Stone Patterns | 25 |
| Bay Stone | 26-29 |
| Vintage Series | 30-33 |
| Holland 4x8 | 34-37 |
| Holland Series | 38-45 |

Special Order Pavers

| | |
|----------------------------|-------|
| Symetry | 46-48 |
| Symetry Patterns | 49 |

Inventoried Paver Colors

| | |
|--|----|
| Standard Color Chart | 50 |
| Spectrum & Elite Color Chart | 51 |
| Old World Color Chart | 52 |
| Accent Pavers Color Chart | 53 |

Special Order Colors

| | |
|---------------------------------|-------|
| Custom Color Projects | 54-55 |
|---------------------------------|-------|

Installation Instructions 56

Inventoried Paver Colors/Shapes 57

ENVIRONMENTAL

| | |
|-----------------------------------|-------|
| Permeable Pavers | 59-62 |
| Geolink Erosion Control | 63 |
| Monoslab® Grass Paver | 64-65 |

WALL STONES

| | |
|--|---------|
| Garden Wall | 67 |
| Glenstone | 68 |
| Old World Glenstone | 69 |
| Glenstone Bullnose | 70 |
| Old World Glenstone Bullnose | 71 |
| Verazzo Stone | 72-75 |
| Stonegate | 76-79 |
| Old World Stonegate | 80-81 |
| Stonegate Caps & Steps | 82 |
| Stonegate Piers | 83 |
| Stonegate Design Details | 84-85 |
| Keystone Compacs | 86 |
| Compac Straight Split | 87-90 |
| Compac Hewnstone | 91-92 |
| Compac Contemporary | 93 |
| Compac Sculptured Split | 94 |
| Keystone Standards | 95 |
| Fire Pit Block | 96-97 |
| Coping Stone | 98 |
| Wall Caps & Stair Treads | 99 |
| Inventoried Wall Colors/Shapes | 100 |
| Wall Color Charts | 101 |
| Installation Instructions | 102-104 |
| Design Details & Geogrid Locations | 105-107 |
| Product Reference Guide | 108-109 |



Fendt is a proud member of both the Interlocking Concrete Pavement Institute (ICPI) and the National Concrete Masonry Association (NCMA). These organizations are recognized as the leading national associations for the advancement of properly designed and installed concrete paving stones and segmental retaining walls, respectively. We recommend that installations of our quality products follow the accepted installation standards of the ICPI and NCMA.



» WARRANTY

Fendt Builder's Supply, Inc., guarantees the structural integrity of our paver and retaining wall products to the original purchaser for residential applications. Should any product prove defective by not meeting existing ASTM specifications and standards, it will be replaced without cost. Replacement labor and shipping costs are not included in this guarantee. Color matching of any replacement units cannot be guaranteed. Proof of original purchase is required.

GUIDELINES FOR NON-WARRANTIED TOPICS

COLORS

The colors of products shown in this catalog are to be used as representations or guidelines only. The photography and printing processes are not fully capable of reproducing exact color of all products. Colors may also change from production run to production run. Not all colors are available in all shapes – check with the sales department for availability. Fendt Builder's Supply, Inc., may change, amend, add or discontinue any product, shape, style or color at its sole discretion with no prior notification. To assure random color distribution, it is recommended that individual blocks and/or pavers be mixed from different pallets on the job site.

CLEANING AND MAINTENANCE

Efflorescence, a white deposit common on concrete and masonry surfaces, is a natural occurrence and no warranty or liability is either expressed or implied for this condition. Cleaners are available for the removal of efflorescence. Residues left on pavers and wall stones from saw-cutting of units or from improper installation of polymeric sands are not the responsibility of Fendt. Cleaners are available for these situations. The face of retaining walls can be stained due to mineral and soil-laden moisture in the backfill area. Cleaners and sealers are available for routine maintenance.

SNOW REMOVAL AND SALTING

Snow can be shoveled or plowed from pavers as readily as other pavements. High-strength, low-absorption Fendt pavers are more resistant to de-icing salts than ordinary concretes, but they can still be damaged by intense application. Magnesium chloride is less damaging to concrete surfaces than other rock salt (sodium chloride) or calcium chloride.

IDEA GALLERY – WALKWAYS

PAVERS: HOLLAND 4x8 – STERLING SMOKE
ACCENT PAVERS: HOLLAND 4x8 – SLATE



IDEA GALLERY – DRIVEWAYS

PAVERS: BAY STONE – MACKINAC
ACCENT PAVERS: HOLLAND 4x8 – SUMMER WHEAT & SLATE



IDEA GALLERY – PATIOS

PAVERS: HOLLAND SERIES – POLAR ASH
BORDER PAVERS: HOLLAND 4x8 – JET BLACK
WALL STONES: STONEGATE – LIMESTONE BLEND
WALL CAPS: 3x24 SMOOTH CAP – SLATE



IDEA GALLERY – POOLS

PAVERS: HOLLAND SERIES – DUNEWOOD
ACCENT PAVERS: HOLLAND 4x8 – COFFEE



IDEA GALLERY – OUTDOOR KITCHENS

PAVERS: HOLLAND 4x8 – POLAR ASH
ACCENT PAVERS: HOLLAND 4x8 – SLATE
WALL STONES: STONEGATE – LIMESTONE BLEND
ACCENT WALL BAND: STONEGATE – SLATE



IDEA GALLERY – FIRE PITS

> FIRE PIT: FIRE PIT BLOCK – SLATE
FIRE PIT CAP: PRECAST UNIT
SEAT WALL: STONEGATE – SLATE
SEAT WALL CAPS: PRECAST UNIT
WALLS: STONEGATE – SLATE
WALL CAPS: 3x24 SMOOTH CAP – LIMESTONE BLEND



IDEA GALLERY – PRIVACY WALLS

WALLS: OLD WORLD STONEGATE – LIMESTONE BLEND
ACCENT WALL COURSE: OLD WORLD STONEGATE – SLATE
CAP: 3x24 SMOOTH CAP – LIMESTONE BLEND



IDEA GALLERY – RETAINING WALLS

› WALLS: STONEGATE – SLATE
WALL CAPS & STEPS: 3x24 SMOOTH CAP – LIMESTONE BLEND



IDEA GALLERY – OUTDOOR FIREPLACES

PAVERS: HOLLAND SERIES – WALNUT BLEND
WALLS STONES: VERAZZO – WALNUT BLEND & SLATE
CAPS: UNIVERSAL CAP – SLATE
CHIMNEY STONES: GLENSTONE – SLATE



PAVING STONES

PAVERS: OLD WORLD VINTAGE – POLAR ASH
ACCENT PAVERS: OLD WORLD VINTAGE XLR – JET BLACK
STEP COPING: OLD WORLD GLENSTONE BULLNOSE – LIMESTONE BLEND

CONTENTS

| | |
|---|-------|
| Old World Holland 4x8 | 14-15 |
| Old World Vintage | 16-19 |
| Old World Vintage Patterns | 20-21 |
| Harbor Stone | 22-24 |
| Harbor Stone & Bay Stone Patterns | 25 |
| Bay Stone | 26-29 |
| Vintage Series | 30-33 |
| Holland 4x8 | 34-37 |
| Holland Series | 38-45 |
| Symetry | 46-48 |
| Symetry Patterns | 49 |
| Standard Color Chart | 50 |
| Spectrum & Elite Color Chart | 51 |
| Old World Color Chart | 52 |
| Accent Pavers Color Chart | 53 |
| Custom Color Projects | 54-55 |
| Installation Instructions | 56 |
| Inventoried Paver Colors/Shapes | 57 |



When it comes to choosing a pavement surface that combines beauty, strength, color, texture and durability, it's hard to look any further than interlocking concrete paving stones, or pavers, for the perfect answer for your driveway, walk or patio.

The wide range of styles and shapes gives the design flexibility to create the most imaginative layouts and patterns. The vast choices of vibrant colors open the possibilities to match virtually any color scheme that you can dream of. And the strength and durability of pavers will pass the most stringent engineering tests that concrete can be put through.

For many years, Fendt has been known as a premier and quality paver manufacturer with some of the richest and most varied colors available to the homeowner and designer alike. As you page through this catalog and begin to dream of your new or refurbished patio, pool deck or driveway, let your imagination dream what can be possible. Fendt — Dream in Color.

OLD WORLD HOLLAND 4x8



OLD WORLD HOLLAND 4x8

Units per sq. ft.: 4.5
Sq. ft. per cube: 108
Weight per sq. ft.: 28 lbs.
Weight per cube: 3,024 lbs.

Sq. ft. per strap: 18
Soldier Coursing:
Per Strap – 27 lineal feet
Per Cube – 162 lineal feet

➤ RIGHT:
PAVERS: OLD WORLD HOLLAND 4x8 – RUSTIC BLEND
BORDER PAVERS: OLD WORLD VINTAGE XLR – SUMMER WHEAT

➤ BELOW:
PAVERS: OLD WORLD HOLLAND 4x8 – BURGUNDY BLEND
(SPECIAL ORDER COLOR)
BORDERS: HOLLAND 4x8 – SLATE
OLD WORLD VINTAGE – LIMESTONE BLEND



OLD WORLD HOLLAND 4x8


PAVERS: OLD WORLD HOLLAND 4x8 – BURGUNDY BLEND
(SPECIAL ORDER COLOR)
BORDERS: HOLLAND 4x8 – SLATE
OLD WORLD VINTAGE – LIMESTONE BLEND




O.W. RUSTIC BLEND



O.W. ANTIQUE BLEND



O.W. WALNUT BLEND



O.W. LIMESTONE BLEND



O.W. SLATE

OLD WORLD VINTAGE

PAVERS: OLD WORLD VINTAGE – LIMESTONE BLEND
BORDER PAVERS: OLD WORLD VINTAGE XLR – JET BLACK



OLD WORLD VINTAGE

PAVERS: OLD WORLD VINTAGE – POLAR ASH
ACCENT PAVERS: OLD WORLD VINTAGE XLR – JET BLACK



STANDARD COLORS



O.W. WALNUT BLEND




O.W. LIMESTONE BLEND


ELITE COLORS




O.W. POLAR ASH



O.W. SUMMER WHEAT
Stocked in Extra Large
Rectangle (XLR) only



O.W. COFFEE
Stocked in Extra Large
Rectangle (XLR) only



O.W. JET BLACK
Stocked in Extra Large
Rectangle (XLR) only


OLD WORLD VINTAGE

PAVERS: OLD WORLD VINTAGE – LIMESTONE BLEND
ACCENT PAVERS: HOLLAND 4x8 – SLATE
WALLS: OLD WORLD STONEGATE – LIMESTONE BLEND
CAPS: 3x24 SMOOTH CAP – SLATE

Large Square



Double Large Rectangle



XL Rectangle




Large Rectangle



Square



OLD WORLD VINTAGE SERIES

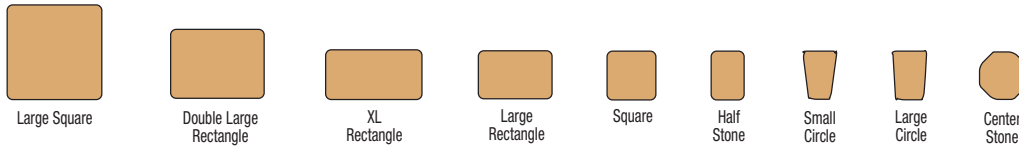


| LARGE SQUARE CUBE | | UNITS PER SQ. FT. | UNITS PER LAYER | SQ. FT. PER LAYER | UNITS PER CUBE | SQ. FT. PER CUBE | SQ. FT. PER STRAP | WEIGHT PER SQ. FT. (LBS.) | | |
|-------------------------------|--|-------------------|-----------------|-------------------|----------------|------------------|-------------------|---------------------------|---------------------------------|-------|
| | Large Square 9-1/2" x 9-1/2" x 2-3/8" | 1.65 | 20 | 12.1 | 160 | 97 | 19.4 | 28 | | |
| DOUBLE LARGE RECTANGLE CUBE | | UNITS PER SQ. FT. | UNITS PER LAYER | SQ. FT. PER LAYER | UNITS PER CUBE | SQ. FT. PER CUBE | SQ. FT. PER STRAP | WEIGHT PER SQ. FT. (LBS.) | | |
| | Double Large Rectangle 7-1/8" x 9-1/2" x 2-3/8" | 2.2 | 25 | 11.36 | 200 | 91 | 18.2 | 28 | | |
| XL RECTANGLE CUBE | | UNITS PER SQ. FT. | UNITS PER LAYER | SQ. FT. PER LAYER | UNITS PER CUBE | SQ. FT. PER CUBE | SQ. FT. PER STRAP | WEIGHT PER SQ. FT. | SOLDIER COURSING LINEAL FOOTAGE | |
| | Extra Large Rectangle 9-1/2" x 4-3/4" x 2-3/8" | 3.1 | 35 | 11.2 | 280 | 90 | 17.92 | 28 | CUBE | STRAP |
| | | | | | | | | | 111 | 22.2 |
| LARGE RECTANGLE CUBE | | UNITS PER SQ. FT. | UNITS PER LAYER | SQ. FT. PER LAYER | UNITS PER CUBE | SQ. FT. PER CUBE | SQ. FT. PER STRAP | WEIGHT PER SQ. FT. | SOLDIER COURSING LINEAL FOOTAGE | |
| | Large Rectangle 7-1/8" x 4-3/4" x 2-3/8" | 4.2 | 42 | 10.0 | 336 | 80 | 13.33 | 28 | CUBE | STRAP |
| | | | | | | | | | 133 | 22.2 |
| SQUARE CUBE | | UNITS PER SQ. FT. | UNITS PER LAYER | SQ. FT. PER LAYER | UNITS PER CUBE | SQ. FT. PER CUBE | SQ. FT. PER STRAP | WEIGHT PER SQ. FT. (LBS.) | | |
| | Square 4-3/4" x 4-3/4" x 2-3/8" | 6.3 | 63 | 10.0 | 504 | 80 | 8.89 | 28 | | |
| CIRCLE BOX (1 CIRCLE PER BOX) | | UNITS PER SQ. FT. | UNITS PER LAYER | SQ. FT. PER LAYER | UNITS PER BOX | SQ. FT. PER BOX | SQ. FT. PER STRAP | WEIGHT PER SQ. FT. (LBS.) | | |
| | Square 4-3/4" x 4-3/4" x 2-3/8" | 6.3 | | | 56 | 8.85 | | 28 | | |
| | Large Circle 4-11/16" x 4-5/16" x 2-3/8" | 8.3 | | | 120 | 14.45 | | 28 | | |
| | Small Circle 4-11/16" x 4-5/16" x 2-3/8" | 8.7 | | | 16 | 1.8 | | 28 | | |
| | Half Stone 4-3/4" x 3-5/8" x 2-3/8" | 8.4 | | | 84 | 10 | | 28 | | |
| | Center Stone 4-3/4" x 3-5/8" x 2-3/8" | 9.0 | | | 4 | 0.4 | | 28 | | |
| Totals for Cube | | | | | 280 | 35.5 | | 1,988 | | |

LAYING A CIRCLE

| ROW NUMBER | SMALL CIRCLE | LARGE CIRCLE | HALF STONE | SQUARE STONE | DIAMETER (INCHES) | SEQUENCE |
|------------|--------------|--------------|------------|--------------|-------------------|---|
| 1 | 8 | — | — | — | 14-1/8 | Next to each other |
| 2 | 8 | — | 8 | — | 23-1/2 | SC, HS, SC, HS, etc. |
| 3 | — | 24 | — | — | 33 | Next to each other |
| 4 | — | 24 | 7 | 1 | 42-1/2 | LC, LC, LC, HS, LC, LC, LC, HS, etc., plus a square at random |
| 5 | — | 24 | 16 | — | 52 | HS, LC, HS, LC, LC, HS, LC, HS, LC, LC, etc. |
| 6 | — | 24 | 24 | — | 61-1/2 | LC, HS, LC, HS, etc. |
| 7 | — | 22 | 23 | 9 | 71 | LC, HS, LC, HS, Square, LC, HS, LC, HS, Square, etc. |

Note: The extra Square Stones left from the Circle Cube can be used to enlarge the circle and to complete your project by themselves or with the stones from the Square/Small Rectangle (SSR) Cube and Large Rectangle (LR) Cube.

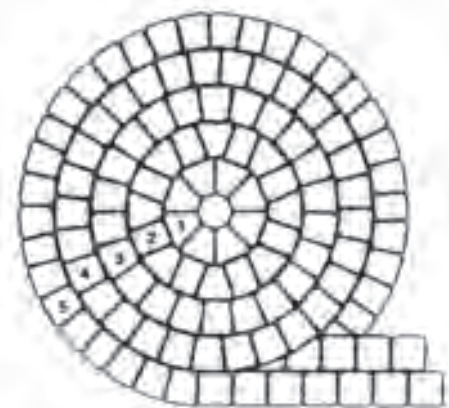


OLD WORLD VINTAGE PATTERNS


LEGEND: S (Square) LR (Large Rectangle) XLR (Extra Large Rectangle)
 LS (Large Square) DLR (Double Large Rectangle)




PATTERN 1
 2 DLR34%
 1 LS22%
 2.83 square feet 4 XLR44%




PATTERN 5
 7 S28%
 7 XLR56%
 3.91 square feet 1 LS16%

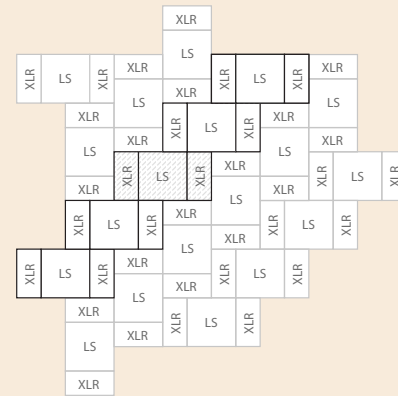


PATTERN 9
 2 XLR50%
 1 LS50%
 1.25 square feet




PATTERN 2
 2 S12%
 4 LR38%
 2 XLR25%
 2.52 square feet 1 LS25%




PATTERN 6
 2 S7%
 1 LR6%
 7 XLR51%
 4.32 square feet 2 DLR22%
 1 LS14%

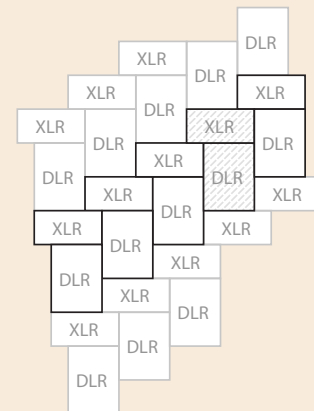


PATTERN 10
 1 XLR40%
 1 DLR60%
 .79 square feet




PATTERN 3
 9 XLR75%
 1 LS17%
 3.75 square feet 2 S8%




PATTERN 7
 4 S14%
 4 LR22%
 2 XLR14%
 4.41 square feet 2 DLR22%
 2 LS28%



PATTERN 11
 10 XLR56%
 4 LS44%
 5.62 square feet




PATTERN 4
 2 LR9%
 8 XLR48%
 2 DLR19%
 5.18 square feet 2 LS24%




PATTERN 8
 2 S6%
 5 LR24%
 8 XLR49%
 5.10 square feet 1 DLR9%
 1 LS12%

OLD WORLD VINTAGE PATTERNS




PATTERN 12
1.41 square feet

| | | |
|-------|-------|-----|
| 1 XLR | | 22% |
| 1 DLR | | 34% |
| 1 LS | | 44% |

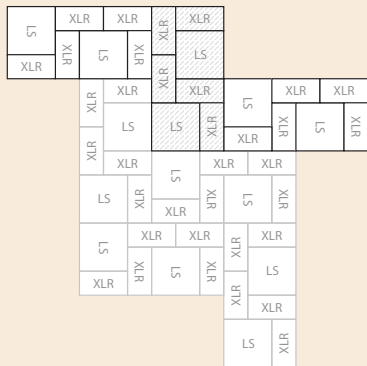

PATTERN 13
2.81 square feet


| | | |
|-------|-------|-----|
| 5 XLR | | 56% |
| 2 LS | | 44% |

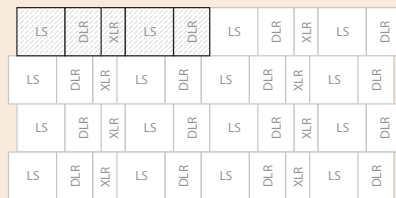

PATTERN 14
2.51 square feet


| | | |
|-------|-------|-----|
| 2 LS | | 50% |
| 2 DLR | | 38% |
| 1 XLR | | 12% |

SIDEWALK PATTERNS

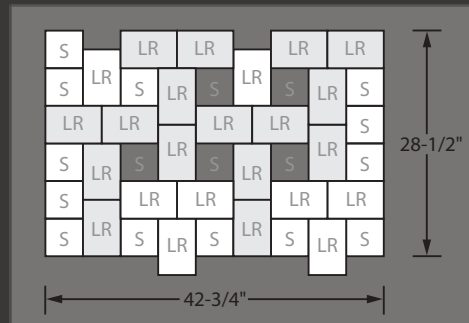


SIDEWALK PATTERN 1
8.48 square feet

| | | |
|-------|-------|-----|
| 18 S | | 33% |
| 24 LR | | 67% |

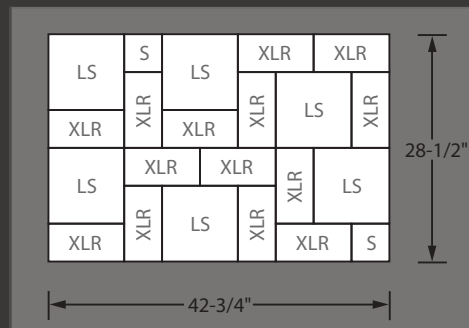


SIDEWALK PATTERN 2
8.48 square feet

| | | |
|--------|-------|-----|
| 2 S | | 4% |
| 14 XLR | | 53% |
| 6 LS | | 43% |

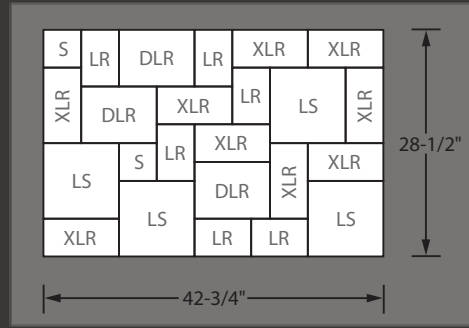

SIDEWALK PATTERN 3
8.48 square feet

| | | |
|-------|-------|-----|
| 2 S | | 4% |
| 6 LR | | 17% |
| 9 XLR | | 33% |
| 3 DLR | | 17% |
| 4 LS | | 29% |

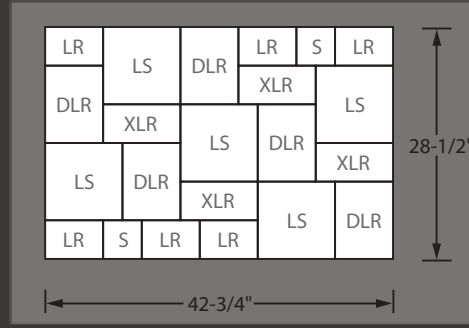

SIDEWALK PATTERN 4
8.48 square feet

| | | |
|-------|-------|-----|
| 2 S | | 3% |
| 6 LR | | 17% |
| 4 XLR | | 15% |
| 5 DLR | | 28% |
| 5 LS | | 37% |

| | SQ. FT. PER CUBE | UNITS PER SQ. FT. | UNITS PER CUBE | SQ. FT. PER STRAP |
|------------------------|------------------|-------------------|----------------|-------------------|
| Square (O.W. only) | 80 | 6.3 | 198 | 8.89 |
| Square/Small Rectangle | 80 | | 576 | 8.89 |
| Large Rectangle | 80 | 4.2 | 336 | 13.33 |
| Extra Large Rectangle | 90 | 3.1 | 280 | 17.92 |
| Double Large Rectangle | 91 | 2.2 | 200 | 18.2 |
| Large Square | 97 | 1.6 | 160 | 19.4 |

HARBOR STONE

PAVERS: HARBOR STONE – IRONWOOD BLEND
BORDER PAVERS: OLD WORLD VINTAGE XLR – TITANIUM
BAY STONE XLR – JET BLACK



HARBOR STONE

PAVERS: HARBOR STONE – STERLING SMOKE
ACCENT PAVERS: HOLLAND 4x8 – SLATE
WALLS: OLD WORLD STONEGATE – LIMESTONE BLEND
CAPS: 3x24 SMOOTH CAP – SLATE
(Installed utilizing Pattern 4)







HARBOR STONE

PAVERS: HARBOR STONE – WALNUT BLEND
PAVER BORDER: HOLLAND 4x8 – JET BLACK
(Installed utilizing Pattern 2)




HARBOR STONE & BAY STONE PATTERNS

PAVERS: HARBOR STONE – STERLING SMOKE
 ACCENT PAVERS: HOLLAND 4x8 – SLATE
 WALL STONES: OLD WORLD STONEGATE – LIMESTONE BLEND
 CAPS: 3x24 SMOOTH CAP – SLATE
 (Installed utilizing Pattern 4)

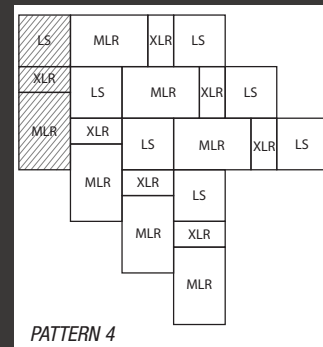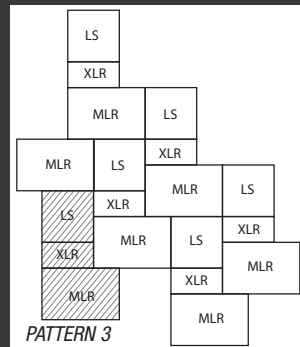

HARBOR STONE COLORS



| | | UNITS PER SQ. FT. | UNITS PER LAYER | SQ. FT. PER LAYER | UNITS PER CUBE | SQ. FT. PER CUBE | SQ. FT. PER STRAP | WEIGHT PER SQ. FT. | SOLDIER COURSING LINEAL FOOTAGE | |
|------------------------------------|--|-------------------|-----------------|-------------------|----------------|------------------|-------------------|--------------------|---------------------------------|---------------|
| LS – 40% MLR – 60% | <i>Mega Large Rectangle</i> 9-1/2" x 14-1/4" x 2-3/8" | 1.06 | 12 | 11.25 | 96 | 90 | 30 | 28 | | |
| XLR – 25% MLR – 75% | <i>Large Square</i> 9-1/2" x 9-1/2" x 2-3/8" | 1.65 | 20 | 12.1 | 160 | 97 | 19.4 | 28 | | |
| XLR – 17% LS – 33% MLR – 50% | <i>Extra Large Rectangle</i> 9-1/2" x 4-3/4" x 2-3/8" | 3.1 | 35 | 11.2 | 280 | 90 | 17.92 | 28 | CUBE 111 | STRAP 22.2 |
| XLR – 17% LS – 33% MLR – 50% | | | | | | | | | | |

BAY STONE

› PAVERS: BAY STONE (MLR) – AU GRES
ACCENT PAVERS: HOLLAND 4x8 WHITESTONE & JET BLACK
FIRE PIT: STONEGATE – SLATE
CAP ON FIRE PIT: 3x24 SMOOTH CAP – SLATE
WALL STONES: STONEGATE – GRAPHITE
CAP: 3x24 SMOOTH CAP – WHITESTONE



BAY STONE


PAVERS: BAY STONE – MACKINAC
ACCENT PAVERS: HOLLAND 4x8 – SUMMER WHEAT & SLATE



SPECTRUM ELITE COLORS




BIRCHWOOD




MACKINAC



AU GRES



POLAR ASH



JET BLACK
Stocked in Extra
Large Rectangle (XLR) only

BAY STONE

PAVERS: BAY STONE – MACKINAC
FIRE PIT: STONEGATE – Mixture of WALNUT BLEND & CAMEL (SPECIAL ORDER)
FIRE PIT CAP: 3x24 SMOOTH CAP – WALNUT BLEND




BAY STONE

PAVERS: BAY STONE – AU GRES
ACCENT PAVERS: BAY STONE XLR – JET BLACK
(Installed utilizing Pattern 2)


SPECTRUM ELITE COLORS




BIRCHWOOD




MACKINAC



AU GRES



POLAR ASH



JET BLACK
Stocked in Extra
Large Rectangle (XLR) only



VINTAGE

PAVERS: VINTAGE – WALNUT BLEND



VINTAGE

PAVERS: VINTAGE – SANDSTONE BLEND




STANDARD COLORS




RUSTIC BLEND



ANTIQUE BLEND



SANDSTONE BLEND



WALNUT BLEND



SLATE
Stocked in Large
Rectangle (LR) only

VINTAGE

PAVERS: VINTAGE – RUSTIC BLEND
ACCENT PAVERS: HOLLAND 4x8 – JET BLACK



VINTAGE SERIES



Large Rectangle



Square



Small Rectangle



Half Stone



Small Circle










Large Circle



Center Stone

| LARGE RECTANGLE CUBE | | UNITS PER SQ. FT. | UNITS PER LAYER | SQ. FT. PER LAYER | UNITS PER CUBE | SQ. FT. PER CUBE | SQ. FT. PER STRAP | WEIGHT PER SQ. FT. | SOLDIER COURSE LINEAL FOOTAGE | |
|---|---|-------------------|-----------------|-------------------|----------------|------------------|-------------------|--------------------|-------------------------------|-------|
| | | | | | | | | CUBE | | STRAP |
|  | Large Rectangle 7-1/8" x 4-3/4" x 2-3/8" | 4.2 | 42 | 10.0 | 336 | 80 | 13.33 | 28 | 133 | 22.2 |


| SQUARE & SMALL RECTANGLE CUBE | | UNITS PER SQ. FT. | UNITS PER LAYER | SQ. FT. PER LAYER | UNITS PER CUBE | SQ. FT. PER CUBE | SQ. FT. PER STRAP | WEIGHT PER SQ. FT. (LBS.) |
|---|--|-------------------|-----------------|-------------------|----------------|------------------|-------------------|---------------------------|
| <i>(Sold in ratio of 3 squares to 1 small rectangle only)</i> | | | | | | | | |
|  | Square 4-3/4" x 4-3/4" x 2-3/8" | 6.3 | 54 | 8.5 | 432 | 68.6 | 8.89 | 28 |
|  | Small Rectangle 4-3/4" x 2-7/16" x 2-3/8" | 12.6 | 18 | 1.4 | 144 | 11.4 | | 28 |
| <i>Totals for Cube</i> | | | 72 | | 576 | 80 | | 2,440 |

| CIRCLE CUBE | | UNITS PER SQ. FT. | UNITS PER LAYER | SQ. FT. PER LAYER | UNITS PER CUBE | SQ. FT. PER CUBE | SQ. FT. PER STRAP | WEIGHT PER SQ. FT. (LBS.) |
|---|---|-------------------|-----------------|-------------------|----------------|------------------|-------------------|---------------------------|
| <i>(1 circle per cube)</i> | | | | | | | | |
|  | Square 4-3/4" x 4-3/4" x 2-3/8" | 6.3 | 14 | 2.2 | 56 | 8.85 | | 28 |
|  | Large Circle 4-11/16" x 4-5/16" x 2-3/8" | 8.3 | 30 | 3.6 | 120 | 14.45 | | 28 |
|  | Small Circle 4-11/16" x 4-5/16" x 2-3/8" | 8.7 | 4 | 0.5 | 16 | 1.8 | | 28 |
|  | Half Stone 4-3/4" x 3-5/8" x 2-3/8" | 8.4 | 21 | 2.5 | 84 | 10 | | 28 |
|  | Center Stone 4-3/4" x 3-5/8" x 2-3/8" | 9.0 | 1 | 0.1 | 4 | 0.4 | | 28 |
| <i>Totals for Cube</i> | | | | | 280 | 35.5 | | 994 |

LAYING A CIRCLE

| ROW NUMBER | SMALL CIRCLE | LARGE CIRCLE | HALF STONE | SQUARE STONE | DIAMETER (INCHES) | SEQUENCE |
|------------|--------------|--------------|------------|--------------|-------------------|---|
| 1 | 8 | — | — | — | 14-1/8 | Next to each other |
| 2 | 8 | — | 8 | — | 23-1/2 | SC, HS, SC, HS, etc. |
| 3 | — | 24 | — | — | 33 | Next to each other |
| 4 | — | 24 | 7 | 1 | 42-1/2 | LC, LC, LC, HS, LC, LC, LC, HS, etc., plus a square at random |
| 5 | — | 24 | 16 | — | 52 | HS, LC, HS, LC, LC, HS, LC, HS, LC, LC, etc. |
| 6 | — | 24 | 24 | — | 61-1/2 | LC, HS, LC, HS, etc. |
| 7 | — | 22 | 23 | 9 | 71 | LC, HS, LC, HS, Square, LC, HS, LC, HS, Square, etc. |

Note: The extra Square Stones left from the Circle Cube can be used to enlarge the circle and to complete your project by themselves or with the stones from the Square/Small Rectangle (SSR) Cube and Large Rectangle (LR) Cube.

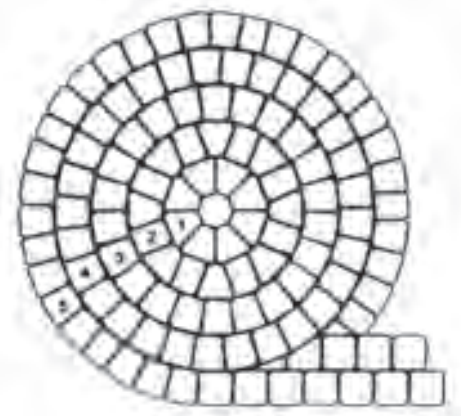

HOLLAND 4x8

PAVERS: HOLLAND 4x8 – SEASHELL BLEND



HOLLAND 4x8

PAVERS: HOLLAND 4x8 – POLAR ASH
ACCENT PAVERS: HOLLAND 4x8 – SLATE
WALLS: STONEGATE – LIMESTONE BLEND
WALL ACCENT COURSE: STONEGATE – SLATE
CAPS: 3x24 SMOOTH CAP – LIMESTONE BLEND



HOLLAND 4x8

PAVERS: HOLLAND 4x8 – JET BLACK & WHITESTONE
ACCENT PAVERS: HOLLAND 4x8 – JET BLACK
PIERS: GLENSTONE – LIMESTONE BLEND
FIRE PIT: COMPAC CONTEMPORARY – LIMESTONE BLEND
CAPS: 3x24 SMOOTH CAP – SLATE



HOLLAND 4x8


PAVERS: HOLLAND 4x8 – STERLING SMOKE
 ACCENT PAVERS: HOLLAND 4x8 – SLATE
 STEP RISERS: GLENSTONE – STERLING SMOKE
 STEP CAPS: 3x24 SMOOTH CAP – LIMESTONE BLEND




STANDARD COLORS




ANTIQUÉ BLEND



RUSTIC BLEND




SLATE




SANDSTONE BLEND




WALNUT BLEND



LIMESTONE BLEND



PEWTER




MOSSY OAK BLEND




LAKESHORE BLEND


ELITE COLORS



IRONWOOD




WHITESTONE



STERLING SMOKE




SEASHELL BLEND



POLAR ASH

ELITE COLORS




COFFEE




JET BLACK



SUMMER WHEAT



ALABASTER



DUNEWOOD

SPECTRUM COLORS



BURGUNDY

HOLLAND SERIES

PAVERS: HOLLAND SERIES – WALNUT BLEND
ACCENT PAVERS: HOLLAND 4x8 – WALNUT BLEND
BORDER PAVERS: OLD WORLD VINTAGE XLR – SUEDE (SPECIAL ORDER)



HOLLAND SERIES

PAVERS: HOLLAND SERIES – POLAR ASH
ACCENT PAVERS: HOLLAND 4x8 – JET BLACK
WALL STONES: STONEGATE – LIMESTONE BLEND
CAPS: 3x24 SMOOTH CAP – SLATE



HOLLAND SERIES

PAVERS: HOLLAND SERIES – LIMESTONE BLEND
ACCENT PAVERS: HOLLAND 4x8 – JET BLACK
WALL STONES: STONEGATE – LIMESTONE BLEND
WALL ACCENT COURSE: OLD WORLD VINTAGE XLR – JET BLACK
STEP COPING: 3x24 SMOOTH CAP – SLATE



HOLLAND SERIES

PAVERS: HOLLAND SERIES – DUNEWOOD BLEND
BORDER PAVERS: HOLLAND 4x8 – COFFEE



HOLLAND SERIES

> PAVERS: HOLLAND SERIES – DUNEWOOD
ACCENT PAVERS: HOLLAND 4x8 – COFFEE
STEP CAPS: 3x24 SMOOTH CAP – CHESTNUT



HOLLAND SERIES

PAVERS: HOLLAND SERIES (12x12 & 8x8 ONLY) – STERLING SMOKE
BORDER PAVERS: HOLLAND 4x8 – SLATE




HOLLAND SERIES

PAVERS: HOLLAND SERIES – LAKESHORE BLEND
ACCENT PAVERS: HOLLAND 4x8 – SLATE
WALL STONES: STONEGATE – LIMESTONE BLEND
WALL ACCENT COURSE: STONEGATE – SLATE
CAPS & STEPS: 3x24 SMOOTH CAP – SLATE



HOLLAND SERIES PATTERN – 12x12 and 8x8 only

Approximate % of total area
12x12 – 69%
8x8 – 31%

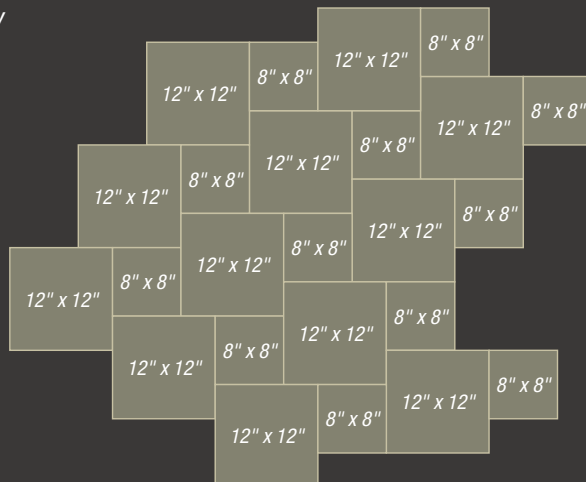


HOLLAND SERIES

PAVERS: HOLLAND SERIES – STERLING SMOKE
 ACCENT PAVERS: HOLLAND 4x8 – JET BLACK
 STEP CAPS: 3x24 SMOOTH CAP – SLATE




STANDARD COLORS



WALNUT BLEND




LIMESTONE BLEND




LAKESHORE BLEND


ELITE COLORS



POLAR ASH



STERLING SMOKE



DUNEWOOD

HOLLAND 4x8

2-3/8" thick
 Units per sq. ft.: 4.5
 Sq. ft. per cube: 108
 Weight per sq. ft.: 28 lbs.
 Weight per cube: 3,024 lbs.
 Sq. ft. per strap: 18

HOLLAND 12x12


2-3/8" thick
 Units per sq. ft.: 1
 Sq. ft. per cube: 72
 Weight per sq. ft.: 28 lbs.
 Weight per cube: 2,016 lbs.
 Sq. ft. per strap: 18

HOLLAND 8x8

2-3/8" thick
 Units per sq. ft.: 2.25
 Sq. ft. per cube: 96
 Weight per sq. ft.: 28 lbs.
 Weight per cube: 2,688 lbs.
 Sq. ft. per strap: 16

HOLLAND SERIES PATTERN ►

| | Approximate % |
|-----------|---------------|
| 4" x 8" | 24% |
| 8" x 8" | 24% |
| 12" x 12" | 52% |

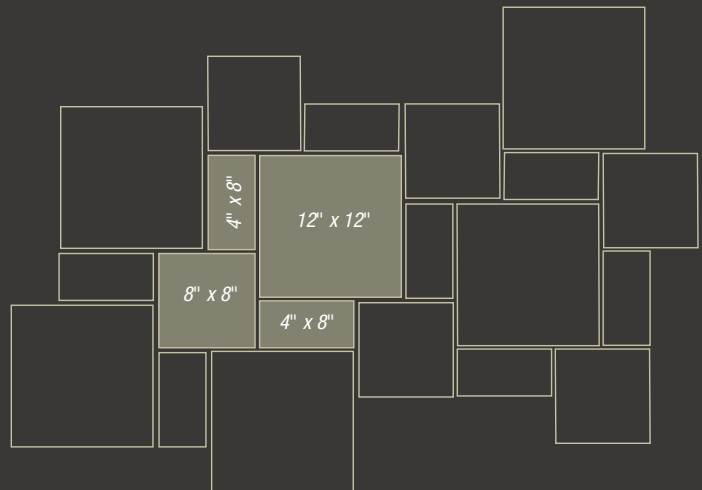

SYMETRY® (SPECIAL ORDER)

› NEXT PAGE:
PAVERS: SYMETRY – RUSTIC BLEND
6x6 – CUSTOM COLOR
(Installed utilizing Venetian Parquet Pattern)



SYMETRY

Units per sq. ft.: 3.4
Sq. ft. per cube: 84
Weight per sq. ft.: 28 lbs.
Weight per cube: 2,352 lbs.
Sq. ft. per strap: 21




6x6 SQUARE

Units per sq. ft.: 4
Sq. ft. per cube: 92
Weight per sq. ft.: 28 lbs.
Weight per cube: 2,576 lbs.
Sq. ft. per strap: 13.14

› RIGHT:
PAVERS: SYMETRY – RUSTIC BLEND
6x6 – CUSTOM COLOR
(Installed utilizing Venetian Parquet Pattern)

› BELOW:
PAVERS: SYMETRY – RUSTIC BLEND
6x6 – SLATE
(Installed utilizing Venetian Parquet Pattern)

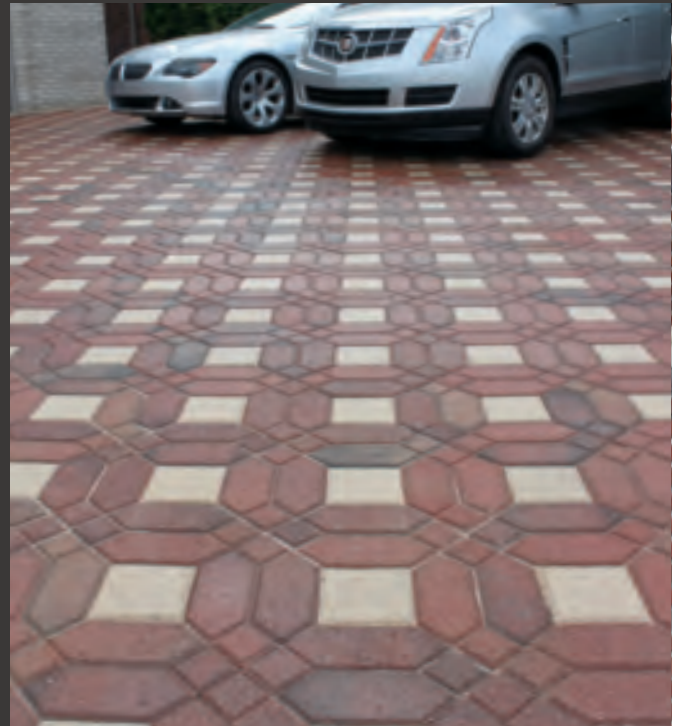

SYMETRY[®] (SPECIAL ORDER)

SYMETRY[®] AND
6X6 SHAPES ARE
AVAILABLE ON
SPECIAL ORDER
ONLY.




SYMETRY[®] (SPECIAL ORDER)


PAVERS: SYMETRY[®] – RUSTIC BLEND
6x6 – CREAM – CUSTOM COLOR
(Installed utilizing Venetian Parquet Pattern)




SYMETRY® PATTERNS (SHOWN WITH 6x6)

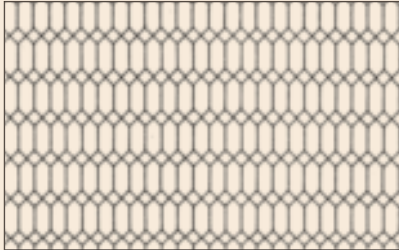


Diamond Run Pattern 100% SYMETRY

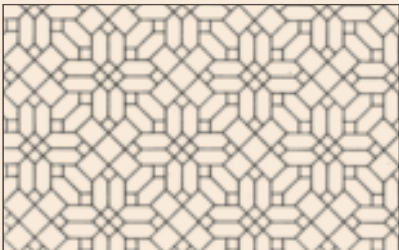


Pattern #7 74.5% SYMETRY 25.5% SQUARES

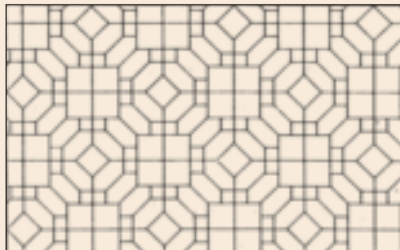


Grand Parquet Pattern 66.2% SYMETRY 33.8% SQUARES

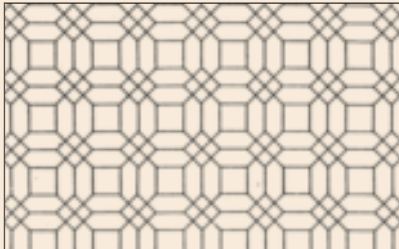


Venetian Parquet Pattern 83% SYMETRY 17% SQUARES

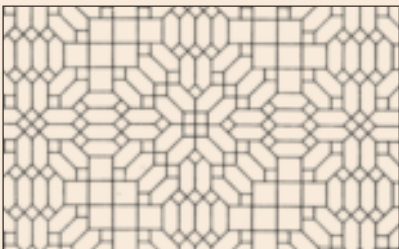


Regency Pattern 83% SYMETRY 17% SQUARES

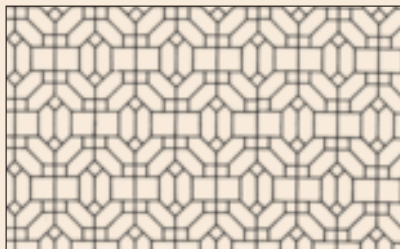


Interpace Pattern 78.5% SYMETRY 21.5% SQUARES

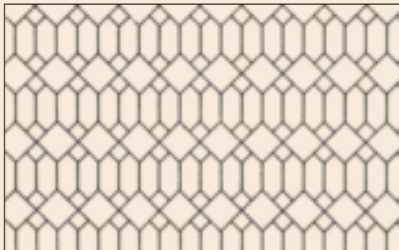


Embassy Row Pattern 71% SYMETRY 29% SQUARES

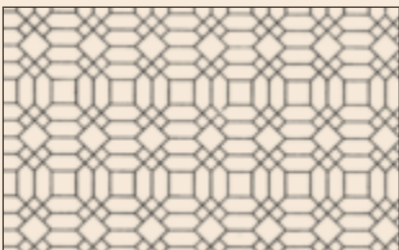


Georgian Parquet Pattern 78.5% SYMETRY 21.5% SQUARES

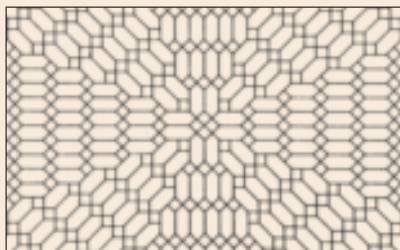

Rondolais Pattern 100% SYMETRY

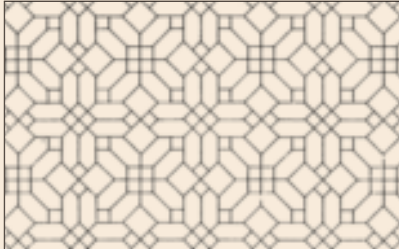

Palace Parquet Pattern 83% SYMETRY 17% SQUARES

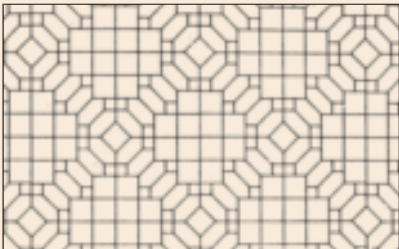

Pattern R.S. 53% SYMETRY 47% SQUARES

Approximate Scale: 1/4" = 1'
(Percentages in Square Feet)

STANDARD COLORS

Fendt offers separate color lines at three separate pricing levels, which include Standard Colors, Spectrum Colors and Elite Colors. Fendt's Standard Colors offer some of the widest varieties of both solid colors and blended colors that are available in today's market.



RUSTIC BLEND



WALNUT BLEND



PEWTER




ANTIQUE BLEND



LIMESTONE BLEND



LAKESHORE BLEND

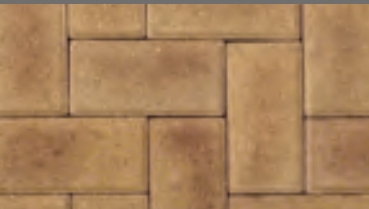

SANDSTONE BLEND



SLATE



MOSSY OAK BLEND
(Minimal Upcharge)

WHEN SELECTING COLOR: The color samples depicted are only a guide to assist in color selection and should not be used to select final color. Actual colors of pavers and walls may vary due to the nature of the raw materials used in processing and the variation of reproduction and printing processes. Final color selection should be made from actual paver and wall products. When installing pavers, use several cubes simultaneously for proper color blending.

SPECTRUM COLORS & ELITE COLORS

Fendt offers two premium color lines, namely Spectrum Colors and Elite Colors. The Spectrum Colors line offers deeper and richer color tones which take standard paver colors to a higher level. The Elite Colors line offers the latest color possibilities when premium colors are combined with premium cements.

SPECTRUM COLORS



BURGUNDY

ELITE COLORS



IRONWOOD




JET BLACK




STERLING SMOKE

ELITE COLORS

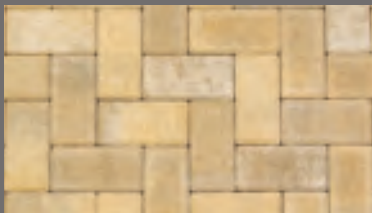

SEASHELL BLEND

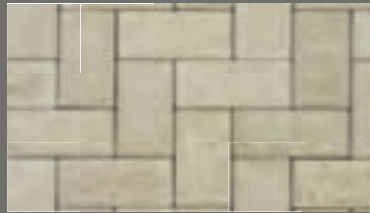

SUMMER WHEAT




COFFEE


ELITE COLORS



ALABASTER

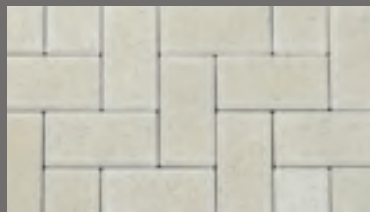


WHITESTONE

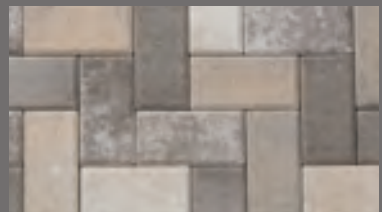

POLAR ASH

ELITE COLORS

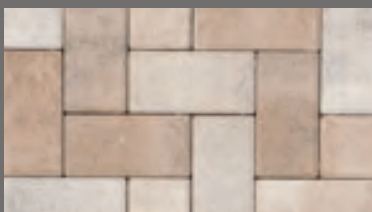

DUNEWOOD

OLD WORLD COLORS

WHEN SELECTING COLOR: The color samples depicted are only a guide to assist in color selection and should not be used to select final color. Actual colors of pavers and walls may vary due to the nature of the raw materials used in processing and the variation of reproduction and printing processes. Final color selection should be made from actual paver and wall products. When installing pavers, use several cubes simultaneously for proper color blending.

STANDARD COLORS



LIMESTONE BLEND



WALNUT BLEND



ANTIQUE BLEND



RUSTIC BLEND



SLATE

ELITE COLORS



POLAR ASH



SUMMER WHEAT
Stocked in Extra Large Rectangle (XLR) only

ACCENT PAVERS — ELITE COLORS

- > TOP:
PAVERS: OLD WORLD VINTAGE – SEASHELL BLEND
ACCENT PAVERS: OLD WORLD VINTAGE XLR – RUBY & JET BLACK
- > BOTTOM:
PAVERS: OLD WORLD VINTAGE – SEASHELL BLEND
ACCENT PAVERS: OLD WORLD VINTAGE XLR – JET BLACK



ELITE ACCENT COLORS INVENTORIED IN
OLD WORLD VINTAGE EXTRA LARGE RECTANGLE



CUSTOM COLOR PROJECTS

Looking for something just a little out of the ordinary? While most wall stone and paver products are stocked in a wide range of common colors, Fendt has the capability to produce custom colors on select jobs. Need your driveway pavers a certain shade of gray or even something bolder? Have a special color that is your backyard patio inspiration? Perhaps you just want something no one else has! Fendt understands.





CUSTOM COLOR PROJECTS



PAVER INSTALLATION INSTRUCTIONS

Interlocking Concrete Paving Stones

1. Prepare the site, making a compacted base with 21AA gravel between 8" and 12" for driveways and with 21AA gravel up to 4" to 6" for patios and walkways. Slope as necessary.
2. Spread a layer of 2NS concrete sand 1" over compacted base. It is important to maintain consistent thickness of bedding sand. Screed the sand to desired level. Allow for thickness of paver and for compaction of sand (approximately 1/4" to 1/2") to be done in step #5.
3. Lay the paving stones in the patterns you choose, starting the edge stones from an existing line such as a curb or house.
4. Make any necessary cutting of stones with a paving stone splitter or masonry saw.
5. Remove and replace any chipped, cracked, or otherwise undesirable pavers prior to compacting, polysanding, or sealing.
6. Make a minimum of two passes over paving stones with a plate vibrator.
7. Fill the joints by sweeping dry sand over the paving stones, leaving a thin layer for final vibration.
8. Vibrate sand into joints and sweep off excess sand. The pavement is now ready for immediate use.

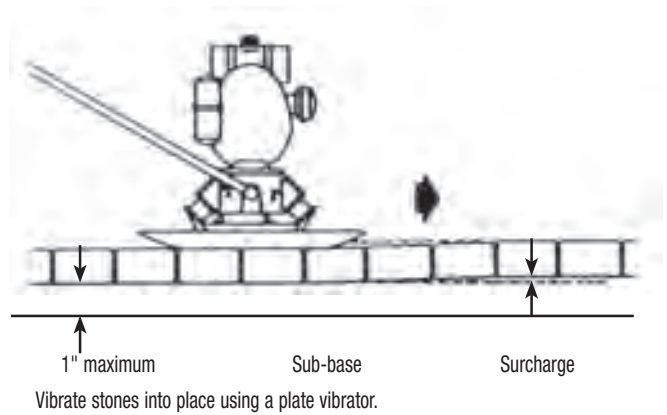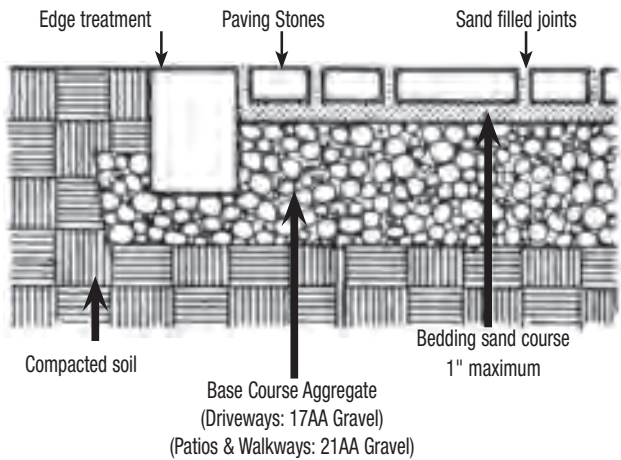


Interlocked Patterns

The Herringbone Patterns

Form the greatest interlock, since the longest continuous joint is only 1-1/2 stones long.




45° Herringbone Pattern



90° Herringbone Pattern


Parquet Pattern

A pattern with unlimited variations.

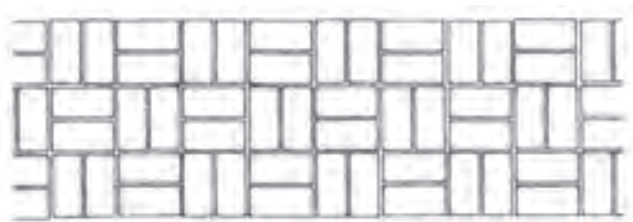

Running Bond Pattern

A traditional pattern that, when used for vehicular traffic, should have traffic crossing the stones' length at right angles.

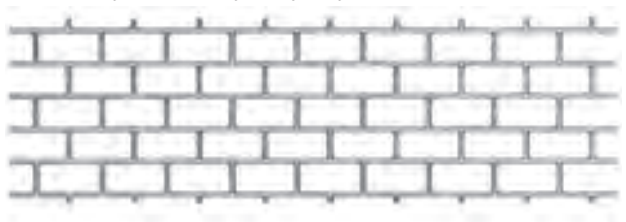

PAVERS — INVENTORIED COLORS AND SHAPES


| | ALABASTER | ANTIQUE | AU GRES | BIRCHWOOD | BURGUNDY | COFFEE | DUNEWOOD | IRONWOOD | JET BLACK | LAKESHORE | LIMESTONE | MACKINAC | MOSSY OAK | PEWTER | POLAR ASH | RUSTIC | SANDSTONE | SEASHELL | SLATE | STERLING SMOKE | SUMMER WHEAT | WALNUT | WHITESTONE |
|--|-----------|---------|---------|-----------|----------|--------|----------|----------|-----------|-----------|-----------|----------|-----------|--------|-----------|--------|-----------|----------|-------|----------------|--------------|--------|------------|
| BAY STONE | | | | | | | | | | | | | | | | | | | | | | | |
| Bay Stone Extra Large Rectangle (XLR) | | | • | • | | | | | • | | | • | | | • | | | | | | | | |
| Bay Stone Large Square (LS) | | | • | • | | | | | | | | • | | | • | | | | | | | | |
| Bay Stone Mega Large Rectangle (MLR) | | | • | • | | | | | | | | • | | | • | | | | | | | | |
| COPING STONE | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | • | | | | | | | | • | | | • | |
| ECOLOGICAL PAVERS | | | | | | | | | | | | | | | | | | | | | | | |
| Eco-Brick | | | | | | | | | | | | | | | | | | | | | | | |
| Eco-Classic | | | | | | | | | | | • | | | | | | | | | | | | |
| Eco-Classic – Old World (OW) | | | | | | | | | | | | | | | | | | | | | | | |
| Monoslab Grass Paver | | | | | | | | | | | | | | • | | | | | | | | | |
| HARBOR STONE | | | | | | | | | | | | | | | | | | | | | | | |
| Harbor Stone Extra Large Rectangle (XLR) | | | | | | | | • | | | | | | | | | | | | | • | | • |
| Harbor Stone Large Square (LS) | | | | | | | | • | | | | | | | | | | | | | • | | • |
| Harbor Stone Mega Large Rectangle (MLR) | | | | | | | | • | | | | | | | | | | | | | • | | • |
| HOLLAND | | | | | | | | | | | | | | | | | | | | | | | |
| Holland 4x8 | • | • | | | • | • | • | • | • | • | • | | • | • | • | • | • | • | • | • | • | • | • |
| Holland 8x8 | | | | | | | • | | | • | • | | | | • | | | | | | • | | • |
| Holland 12x12 | | | | | | | • | | | • | • | | | | • | | | | | | • | | • |
| Holland 4x8 Old World (OW) | | • | | | | | | | | | • | | | | | • | | | • | | | | • |
| VINTAGE | | | | | | | | | | | | | | | | | | | | | | | |
| Vintage Circle (C) | | • | | | | | | | | | | | | | | • | • | | | | | | • |
| Vintage Square/Small Rectangle (SSR) | | • | | | | | | | | | | | | | | • | • | | | | | | • |
| Vintage Large Rectangle (LR) | | • | | | | | | | | | | | | | | • | • | | • | | | | • |
| Vintage Extra Large Rectangle (XLR) | | | | | | | | | | | | | | | | | | | | | | | |
| Vintage Double Large Rectangle (DLR) | | | | | | | | | | | | | | | | | | | | | | | |
| Vintage Large Square (LS) | | | | | | | | | | | | | | | | | | | | | | | |
| VINTAGE – OLD WORLD (OW) | | | | | | | | | | | | | | | | | | | | | | | |
| OW Vintage Circle (C) | | | | | | | | | | | • | | | | • | | | | | | | | • |
| OW Vintage Square (S) | | | | | | | | | | | • | | | | • | | | | | | | | • |
| OW Vintage Large Rectangle (LR) | | | | | | | | | | | • | | | | • | | | | | | | | • |
| OW Vintage Extra Large Rectangle (XLR) | | | | | | • | | • | | • | • | | | | • | | | | | | • | | • |
| OW Vintage Double Large Rectangle (DLR) | | | | | | | | | | • | • | | | | • | | | | | | | | • |
| OW Vintage Large Square (LS) | | | | | | | | | | • | • | | | | • | | | | | | | | • |

• = In Stock

ENVIRONMENTAL PRODUCTS

CONTENTS

Permeable Pavers 59-61
Geolink Erosion Control 63
Monoslab® Grass Paver 64-65

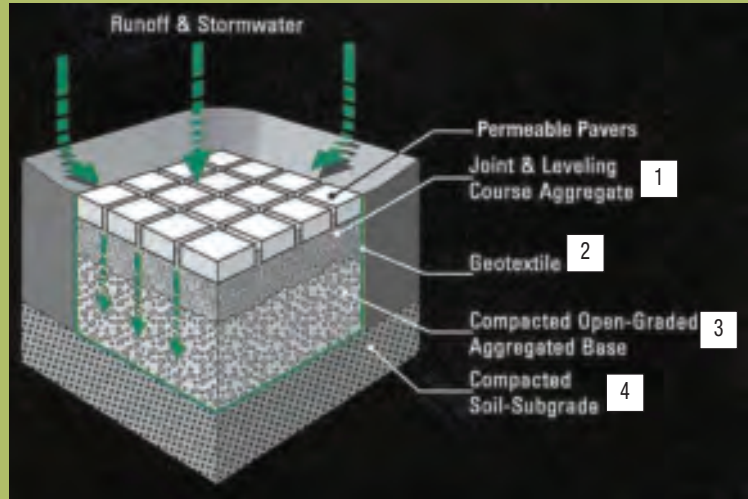

- 1 JOINT FILLING BEDDING LAYER
1/8" Crushed Stone Chips @ 1-1/2" Thick
- 2 GEOTEXTILE
Non-woven Geotextile Fabric, Minimum 4.0 Ounces Per Square Yard
- 3 BASE COURSE
6A Crushed Aggregate @ 6" Minimum Thickness
- 4 SUBGRADE*
Well Compacted Undisturbed Soil

*Subgrade soil type will determine the need for an outlet from base course to bioswale area. Applicable soil types are fine-grain or impervious soils such as clay. See a qualified Fendt representative for bioswale applications.

Permeable pavements now offer a new dimension by allowing a higher percentage of rainwater to permeate through the pavement system as opposed to overburdened storm water systems. When installed as part of the Bio-Aquifer Storm System (BASS), permeable pavers allow for natural storm water drainage and ground water recharge, making them ecologically sound and economically smart.

A parking lot or street created with BASS uses durable, permeable components that allow water to flow through, retaining the water runoff and directing it through a series of natural filtration systems before it enters nearby streams or rivers. Fendt's Eco-Brick™ and Eco-Classic are the perfect solution that can transform any paver parking lot, driveway or pavement area into a beautiful and sustainable pavement that effectively manages storm water.

PERMEABLE PAVERS: ECO-CLASSIC

Eco-Classic

PRODUCT INFORMATION

FULL BRICK
4-1/2" x 9" x 3-1/8"
.272 sq. ft. per unit
3.68 units per sq. ft.
36 units/layer, 252/cube

HALF BRICK
4-1/2" x 4-1/2" x 3-1/8"
.136 sq. ft. per unit
7.35 units per sq. ft.
8 units/layer, 56/cube

10.9 sq. ft. per layer
76.30 sq. ft. per cube

Weight per cube: 2,719 lbs.



ECO-CLASSIC
INVENTORIED IN LIMESTONE BLEND (ABOVE)

Old World Eco-Classic (SPECIAL ORDER)

PRODUCT INFORMATION

FULL BRICK
4-1/2" x 9" x 3-1/8"
.272 sq. ft. per unit
3.68 units per sq. ft.
36 units/layer, 252/cube

HALF BRICK
4-1/2" x 4-1/2" x 3-1/8"
.136 sq. ft. per unit
7.35 units per sq. ft.
8 units/layer, 56/cube

10.9 sq. ft. per layer
76.30 sq. ft. per cube

Weight per cube: 2,719 lbs.




OLD WORLD ECO-CLASSIC

PERMEABLE PAVERS: ECO-CLASSIC

▶ PAVERS: ECO-CLASSIC – WALNUT BLEND (Special Order Color)

STANDARD COLORS



LIMESTONE BLEND



PERMEABLE PAVERS: ECO-CLASSIC

PAVERS: ECO-CLASSIC – SANDSTONE BLEND (Special Order Color)
ACCENT PAVERS: ECO-CLASSIC – JADE (Special Order Color)



PERMEABLE PAVERS: ECO-BRICK™ (SPECIAL ORDER)

> ECO-BRICK – LIMESTONE BLEND
BORDER: HOLLAND 4x8 – SLATE



PRODUCT INFORMATION

FULL BRICK
4-1/2" x 9" x 3-1/8"
.272 sq. ft. per unit
3.68 units per sq. ft.
36 units/layer, 252/cube

HALF BRICK
4-1/2" x 4-1/2" x 3-1/8"
.136 sq. ft. per unit
7.35 units per sq. ft.
8 units/layer, 56/cube




GEOLINK (SPECIAL ORDER)



Soil erosion has been an issue plaguing engineers for decades. It is a well-known fact that the single biggest impact on water quality is the soil erosion process. As a result of new federal and local regulations mandating the control of silt runoff, the engineering community must now use innovative measures to control the erosion process.


Geolink's premium design inhibits the transport of soil during the erosion process and helps keep our waterways free from silt and hazardous pollutants. Open cells within the block support and maintain vegetative growth, enhancing water quality through a natural cleansing process by filtering out contaminants. Geolink's superior methods of erosion control promote a natural, aesthetically pleasing environment.

| G E O L I N K Unit Specifications | | | | | | | |
|-----------------------------------|-------|--------|------------------------------------|--------------------------------|------------------|-----------------|--|
| depth | width | length | gross coverage per ft ² | weight | weight per sq ft | units per sq ft | |
| 4" | 12" | 16" | 1.12 | 36.6 | 32-37 | 20 | |
| UNITS PER PALLET – 48 | | | | WEIGHT PER PALLET – 1,469 LBS. | | | |

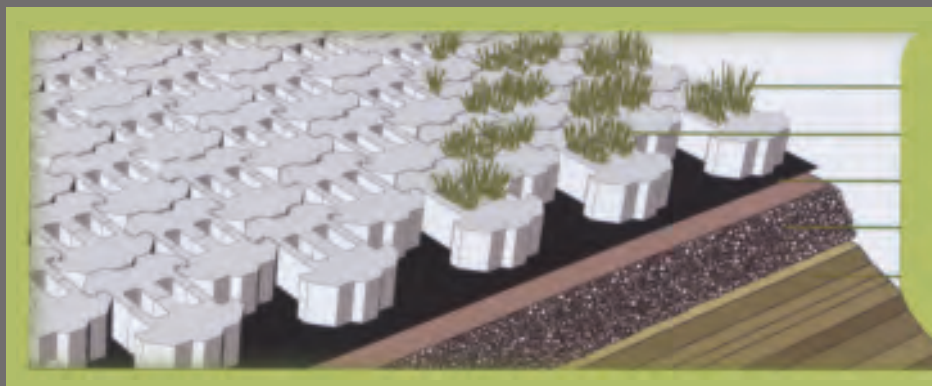

PERMEABLE GRASS PAVER

- Geolink units with vegetation
- Soil-filled units
- Engineering fabric layer
- Drainage media
- Prepared subgrade foundation

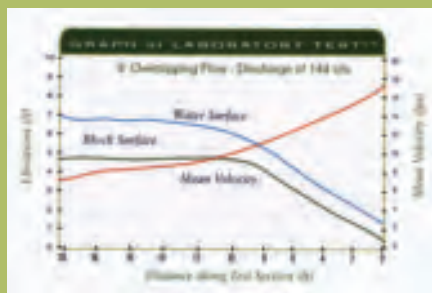

GRASS PAVERS: MONOSLAB[®]

MULTI-PURPOSE MONOSLAB GRASS PAVER ... THE PROBLEM SOLVER!

STABILIZES GRASSY AREAS:

- FOR FIRE LANES
- HIGHWAY CROSSOVERS
- RUNWAY SHOULDERS

It's the natural look in paving ... proven over three decades in use. Monoslab Grass Pavers allow a lawn area to be used for parking or driveways — preserving green space in places where it's scarce.

Monoslab Grass Pavers eliminate the dust or mud normally created by allowing traffic in unpaved areas, and can be used in any area where you want to allow vehicular traffic while preserving the look of a lawn.

The unique design of Monoslab affords better weight distribution and increased load bearing capacity. The surface pattern encourages controllable drainage, while stimulating grass growth.

Fast and simple to install in any weather, Monoslab Grass Pavers are available for immediate use.

Monoslab Grass Paver grids permit emergency vehicles and fire trucks to approach buildings from all directions saving time and possibly lives. Heavy trucks drive over stabilized grassy areas leaving no trace.

When considering the areas around apartments and other commercial buildings, the design professional has an alternative to traditional asphalt and other hard surfacing. Monoslab is not subject to most restrictive zoning ordinances that cover hard pavement.

Monoslab grids enable emergency and surface vehicles to cross over between concrete and asphalt pavements.

Especially suitable at curves, concrete grids are readily seen at night. Fast, easy installation. Tire rumbling when driving over the concrete grids alerts drivers.



GOOD NEWS FOR FIREFIGHTERS, LANDSCAPE ARCHITECTS & HIGHWAY/WATERWAY ENGINEERS

SAVES GRASS ... The design professional now has an exciting option when considering surfacing for areas around apartment buildings, shopping malls, office buildings and other urban developments. Monoslab offers a relief from traditional hard surfacing by introducing stabilized grass areas. Suitable for parking lots and overflow parking areas, it will also allow utility trucks to drive over landscaped grounds.

STOPS EROSION ... Monoslab is the best answer to stabilize slopes and put an end to persistent erosion problems. Even river bed erosion in fast-flowing rivers or open culverts can be effectively controlled with Monoslab.

It is also successfully used as revetments to reinforce reservoirs and shoreline slopes and to provide seawall toe protection. After Monoslab is laid and grass established, an installation can be mowed as normal grass.



MONOSLAB® GRASS PAVERS

EASY TO INSTALL



STEP 1


For heavy loads, bulldoze one foot below finished grade.

For light loads (automobiles), bulldoze one-half foot below finished grade.



STEP 2

For light loads, spread and tamp — or roll — one inch sand bed directly on the sub-grade.

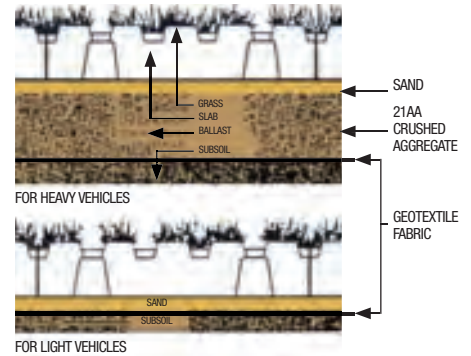

STEP 3

For heavy loads (trucks), spread and tamp — or roll — six inches of crushed rock or crushed concrete over continuous geotextile fabric for heavy vehicle base course. Not required for light loads, such as automobiles.

Spread and tamp — or roll — one-inch sand bed on the six-inch ballast course.




STEP 4

Level the paver grids on the sand bed. Keep them "pencil thickness" apart.



STEP 5

Ready for service.

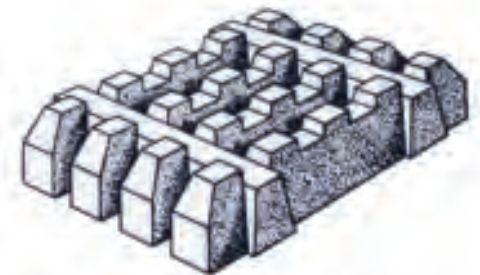


SO MANY BENEFITS:

- Minimize storm water runoff
- Replenish subterranean ground water
- Avoid erosion and soil wash away
- Protect lawns from wheel tracks
- Reduce hard surface pavement

All of the above objectives can be accomplished by installing Monoslab. On a test installation of tufted Grass Paver bedded on two inches of coarse sand spread over six inches of gravel, with clay subsoil, no water ran off for an hour. Storm water runoff then ranged from 5% to 18%.

SPECIFICATIONS

| MEASUREMENTS | USA/CAN actual | USA/CAN nominal | USE NOMINAL VALUES FOR COMPUTATIONS |
|--------------------------|-------------------|---------------------|---|
| Length | 23-1/2" | 24 in. - 2 ft. | +/- 1/8" |
| Width | 15-3/8" | 16 in. - 1-1/3 ft. | +/- 1/8" |
| Thickness | 4-9/16" | 4-1/2 in. - 3/8 ft. | +/- 1/16" |
| Area, gross | 370 sq. in. | 2-2/3 sq. ft. | 3 grids = 8 sq. ft. |
| Area, upper surface | 95 sq. in. | 2/3 sq. ft. | 25% of gross area |
| Area, base surface | 326 sq. in. | 2-1/2 sq. ft. | 85% of gross area |
| Weight/grid | 94 lb. +/- 3 lbs. | 94 lbs. | depends on water absorption |
| Strength, compression | 4000 psi | 4000 psi | per ASTM C140-70 |
| Braking load, transverse | - | - | see specification and test procedure sheets |
| Absorption, water | 13 lbs. / cu. ft. | 13 lbs. / cu. ft. | per ASTM C140-70 |

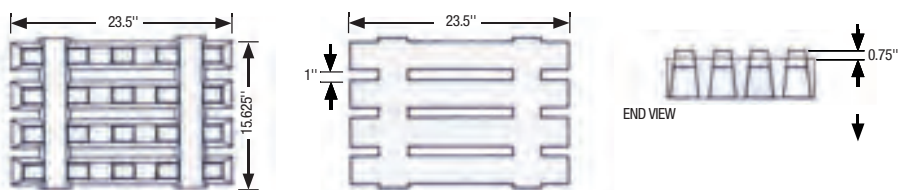

WALL STONES

WALLS: OLD WORLD STONEGATE – LIMESTONE BLEND
ACCENT WALL COURSE: OLD WORLD STONEGATE – SLATE
CAPS: 3x24 SMOOTH CAPS – LIMESTONE BLEND

CONTENTS

| | |
|--|---------|
| Garden Wall | 67 |
| Glenstone | 68 |
| Old World Glenstone | 69 |
| Glenstone Bullnose | 70 |
| Old World Glenstone Bullnose | 71 |
| Verazzo Stone | 72-75 |
| Stonegate | 76-79 |
| Old World Stonegate | 80-81 |
| Stonegate Caps & Steps | 82 |
| Stonegate Piers | 83 |
| Stonegate Design Details | 84-85 |
| Keystone Compacs | 86 |
| Compac Straight Split | 87-90 |
| Compac Hewnstone | 91-92 |
| Compac Contemporary | 93 |
| Compac Sculptured Split | 94 |
| Keystone Standards | 95 |
| Fire Pit Blocks | 96-97 |
| Coping Stone | 98 |
| Wall Caps & Stair Treads | 99 |
| Inventoried Wall Colors/Shapes | 100 |
| Wall Color Charts | 101 |
| Installation Instructions | 102-104 |
| Design Details & Charts | 105-107 |
| Product Reference Guide | 108-109 |




The perfect way to complete your hardscape project is with Fendt concrete wall stones. We feature the Keystone Retaining Wall product line, which has been recognized as the leader in Segmental Retaining Walls (SRWs).

This same style, technology and performance that engineers have specified for years is now available in a wide range of colors and designs to fit your every need and situation. With various styles of wall stones to choose from, your yard can become a showcase to satisfy every possible design.

Fendt's history and experience with colors in concrete pavers is now yours to expand your design options when utilizing retaining walls, courtyard walls, piers and fire pits. As you consider the right wall product to use to complement the rest of your hardscape design, let yourself dream in color!

GARDEN WALL



LIMESTONE BLEND



RUSTIC BLEND




DESERT BROWN



ANTIQUE BLEND



SLATE



GREY

When it's time to create the garden of your dreams, Fendt offers a full line of Garden Wall brand wall stones to create the elegant and unique look you want. Garden Wall products come in a wide variety of exceptional colors. With their three-dimensional, textured appearance, they add an element of rugged perfection to any garden project.



(Unit shown upside-down to show rear lug)



RIGHT: KEYSTONE GARDEN WALL – GRAY


Removing rear lugs when building curves

To remove outside lugs or edges of retaining lip, hold unit securely or place at angle on ground. Strike the lug firmly with a hammer. Always wear safety glasses to protect eyes from chips.



Size: 4" h x 12" w x 8" d
 Exposed face area: 1/3 sq. ft. (4" x 12")
 Weight: 25 lbs.
 Units per pallet: 96 units
 Weight per pallet: 2,400 lbs.

Typical Landscape Wall Section Shown at Right

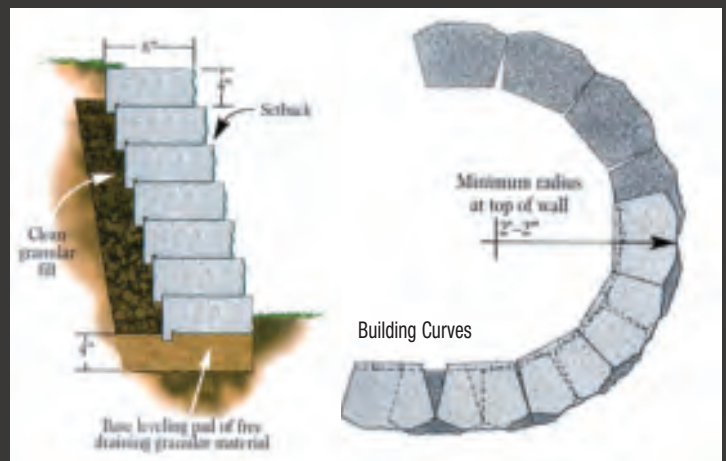


GLENSTONE

> WALL STONES: GLENSTONE – SLATE
 WALL ACCENT COURSE: OLD WORLD VINTAGE XLR – COFFEE
 WALL CAPS: GLENSTONE BULLNOSE – SLATE
 PIERS: GLENSTONE – LIMESTONE BLEND
 PIER ACCENT COURSE: OLD WORLD VINTAGE XLR – COFFEE


STANDARD COLORS




WALNUT BLEND




SLATE




RUSTIC BLEND



SAHARA BLEND




GREYSTONE




LIMESTONE BLEND

SPECTRUM COLORS




BURGUNDY BLEND




CHESTNUT


ELITE COLORS



IRONWOOD



STERLING SMOKE



ALABASTER



Old World 4'' Radius Glenstone

- Size: 4''h x 8''d x 12-1/4''/9-1/8''w
- Use with Glenstone to Turn Radius
- No Cutting Required – 16 units per circle
- Weight: 27.55 lbs.
- Units per pallet: 96 units
- Weight per pallet: 2,645 lbs.
- Stock Colors: Walnut, Limestone, Slate



Glenstone / Old World Glenstone

- Size: 4''h x 8''d x 12''w
- Exposed face area: 1/3 sq. ft. (4'' x 12'')
- Weight: 32 lbs.
- Units per pallet: 96 units
- Weight per pallet: 3,072 lbs.

OLD WORLD GLENSTONE


- > TOP:
 WALLS: OLD WORLD GLENSTONE – STERLING SMOKE
 PAVERS: HOLLAND SERIES – STERLING SMOKE
- > BOTTOM:
 WALL STONES: OLD WORLD GLENSTONE – IRONWOOD
 WALL ACCENT COURSE: GLENSTONE – SLATE
 PAVERS: HOLLAND SERIES – SANDSTONE
 ACCENT PAVERS: OLD WORLD VINTAGE XLR – SUMMER WHEAT



STANDARD COLORS



O.W. WALNUT BLEND



O.W. SLATE



O.W. RUSTIC BLEND



O.W. SAHARA BLEND



O.W. GREYSTONE



O.W. LIMESTONE BLEND

SPECTRUM COLORS



O.W. BURGUNDY BLEND



O.W. CHESTNUT

ELITE COLORS



O.W. IRONWOOD



O.W. STERLING SMOKE



O.W. ALABASTER

GLENSTONE BULLNOSE

› TOP:
STEP COPING: GLENSTONE BULLNOSE – SLATE
WALL STONES: OLD WORLD GLENSTONE – IRONWOOD BLEND

› BOTTOM:
WALLS: VERAZZO STONE – CAMEL (SPECIAL ORDER)
STEP COPING: GLENSTONE BULLNOSE – CAMEL (SPECIAL ORDER)
WALL ACCENT COURSE: GLENSTONE – SLATE
PAVERS: HOLLAND SERIES – WALNUT BLEND
ACCENT PAVERS: HOLLAND 4x8 – SLATE


STANDARD COLORS




WALNUT BLEND



SLATE



SAHARA BLEND



LIMESTONE BLEND



OLD WORLD GLENSTONE BULLNOSE

STEP COPING: OLD WORLD GLENSTONE BULLNOSE – CAMEL (SPECIAL ORDER)
PAVERS: HARBOR STONE – IRONWOOD
ACCENT PAVERS: OLD WORLD VINTAGE XLR – COFFEE & SUMMER WHEAT
WALLS: OLD WORLD STONEGATE – CAMEL (SPECIAL ORDER)
WALL ACCENT COURSE: OLD WORLD VINTAGE XLR – COFFEE



STANDARD COLORS



O.W. WALNUT BLEND



O.W. SAHARA BLEND



O.W. SLATE



O.W. LIMESTONE BLEND

KEYSTONE VERAZZO STONE™

WALLS: VERAZZO STONE – WALNUT BLEND
CAPS: UNIVERSAL CAP – GRAY
PAVERS: HOLLAND SERIES – WALNUT BLEND



KEYSTONE VERAZZO STONE™

WALLS: VERAZZO STONE – WALNUT BLEND
STEPS: UNIVERSAL CAP – WALNUT BLEND
PAVERS: HOLLAND SERIES – WALNUT BLEND



KEYSTONE VERAZZO STONE™

PIERS: VERAZZO RETURN CORNERS – WALNUT BLEND
 PIER ACCENT COURSE: GLENSTONE – SLATE
 PAVERS: HOLLAND SERIES – WALNUT BLEND



STANDARD COLORS



WALNUT BLEND



RUSTIC BLEND



LIMESTONE BLEND




SLATE



SAHARA BLEND

SPECTRUM COLOR




CHESTNUT

ELITE COLOR



GRAPHITE BLEND

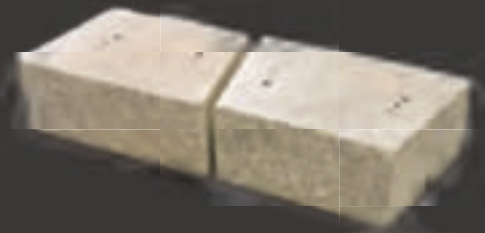

With unmatched strength and stability, Keystone Verazzo Stone™ has rugged good looks and aesthetic appeal. Each Keystone Verazzo Stone™ is angled on both sides providing different face lengths for a tight fitting, straight wall. Aligning units is also effortless due to the Keystone proven pin connection system. Each stone contains multiple pin positions allowing for a nearly vertical or offset wall.


Keystone Verazzo Stone™ looks like a natural element in your yard because each unit is finished on two sides.

Size.....6" h x 16"/12" w x 10-1/2" d
 Exposed face area.....0.58 sq. ft. (avg.)
 Weight.....73 lbs.
 Units per pallet.....45 units
 Weight per pallet.....3,272 lbs.
 Pins.....2/block, 50/bag

Verazzo Pin




18 Pieces
 93" O.D.
 71" I.D.

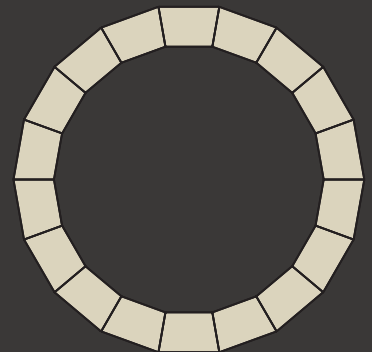

VERAZZO RETURN CORNER

WALL STONES: VERAZZO STONE – CAMEL (SPECIAL ORDER)
PAVERS: HOLLAND SERIES – WALNUT BLEND
PAVER BORDER: HOLLAND 4x8 – SLATE

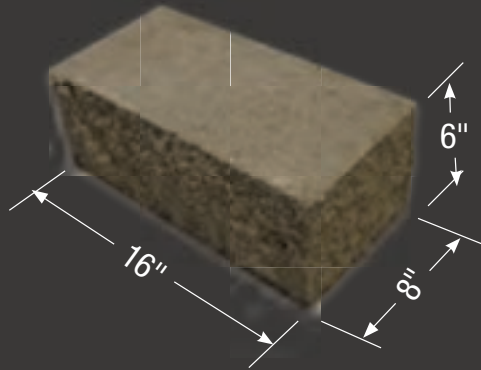

Verazzo Return Corner



Corner Construction



24" x 24" Pier
Utilizing 4-Return Corners



KEYSTONE STONEGATE

WALLS: STONEGATE – LIMESTONE BLEND
WALL ACCENT COURSE: STONEGATE – SLATE
CAPS: 3x24 SMOOTH CAP – LIMESTONE BLEND
PAVERS: HOLLAND 4x8 – POLAR ASH
PAVER BORDER: HOLLAND 4x8 – SLATE



KEYSTONE STONEGATE

WALL STONES: STONEGATE – SAHARA BLEND
WALL CAPS: 3x24 CAP SMOOTH – CHESTNUT
PAVERS: HOLLAND SERIES – DUNEWOOD



KEYSTONE STONEGATE

- › TOP:
WALLS: STONEGATE – LIMESTONE BLEND
STEPS: GLENSTONE BULLNOSE – LIMESTONE BLEND
- › BOTTOM:
WALLS: STONEGATE – WALNUT BLEND
CAPS: 3x24 SMOOTH CAPS – WALNUT BLEND




KEYSTONE STONEGATE


> WALL STONES: STONEGATE – SLATE
 ACCENT WALL COURSE: STONEGATE – LIMESTONE BLEND
 WALL CAPS: 3x24 CAP SMOOTH – LIMESTONE BLEND
 PAVERS: HARBOR STONE – WALNUT BLEND




STANDARD COLORS




RUSTIC BLEND




WALNUT BLEND



LIMESTONE BLEND




SAHARA BLEND



SLATE

ELITE COLORS



GRAPHITE BLEND



ALABASTER

Set size 6" h x 10" d x 32" w max.
 Exposed face area 1.4 sq. ft. max.
 Weight/set 137 lbs.
 Sets per pallet 20
 Weight per pallet 2,788 lbs.

LARGE UNIT

60 lbs. (27 kg)
 6" h x 10" d x 16" / 14" w
 (150mm x 250mm x 400mm/350mm)



MEDIUM UNIT

40 lbs. (18 kg)
 6" h x 10" d x 12" / 10" w
 (150mm x 250mm x 300mm/250mm)



SMALL UNIT

25 lbs. (11 kg)
 6" h x 10" d x 6" / 4" w
 (150mm x 250mm x 150mm/100mm)



KEYSTONE OLD WORLD STONEGATE

WALLS: OLD WORLD STONEGATE – WALNUT BLEND
CAPS: 3x24 CAP – GREYSTONE (Special Order Color)



KEYSTONE OLD WORLD STONEGATE

WALLS: OLD WORLD STONEGATE – LIMESTONE BLEND
CAPS: 3x24 SMOOTH CAP – SLATE
PAVERS: HARBOR STONE – STERLING SMOKE
ACCENT PAVERS: HOLLAND 4x8 – SLATE


STANDARD COLORS



O.W. RUSTIC BLEND



O.W. WALNUT BLEND



O.W. LIMESTONE BLEND




O.W. SAHARA BLEND




O.W. SLATE

ELITE COLORS



O.W. GRAPHITE BLEND



O.W. ALABASTER



Set size 6" h x 10" d x 32" w max.
Exposed face area 1.4 sq. ft. max.
Weight/set 137 lbs.
Sets per pallet 20
Weight per pallet 2,788 lbs.

LARGE UNIT

60 lbs. (27 kg)
6" h x 10" d x 16" / 14" w
(150mm x 250mm x 400mm/350mm)



MEDIUM UNIT

40 lbs. (18 kg)
6" h x 10" d x 12" / 10" w
(150mm x 250mm x 300mm/250mm)



SMALL UNIT

25 lbs. (11 kg)
6" h x 10" d x 6" / 4" w
(150mm x 250mm x 150mm/100mm)



STONEGATE • CAPS & STEPS

CAPS

Cap Unit
(One side textured)
72 lbs.
3" h x 12" d x 24" w



Cap Unit
(Smooth all sides)
72 lbs.
3" h x 12" d x 24" w



Stocked in all six Standard colors

Stocked in all Stonegate colors and Burgundy Blend

Exposed face area 1/2 sq. ft. (3" x 24")
Units per pallet 48 units
Weight per pallet 3,504 lbs.
Linear foot coverage 2 l.f.

PINS

Stonegate Shouldered Pin
5-1/4" long
1/2" diameter
3/4" diameter at shoulder
100 pins/box
5 pins/set of Stonegate
1 box (100 pins) per pallet of Stonegate



COUNTRY CORNER



The 3" x 12" x 12" Country Corner coping corner unit allows the user to make attractive and simple-to-build 90 degree corners when capping a wall using the 3" x 12" x 24" cap. It has two faces, either textured or smooth to match the 24" caps with one side textured or with all smooth sides. This eliminates the need to make difficult miter cuts and also allows the user to make attractive caps for the 20", 26", 30" and 38" Stonegate piers (See page 83).


Size 3" h x 12" d x 12" w
Exposed face area 1/4 sq. ft. (3" x 12")
Weight 36 lbs.
Units per pallet 96 units
Weight per pallet 3,504 lbs.

Face and Sides Textured
Special Order

Smooth All Sides



STEP DETAILS

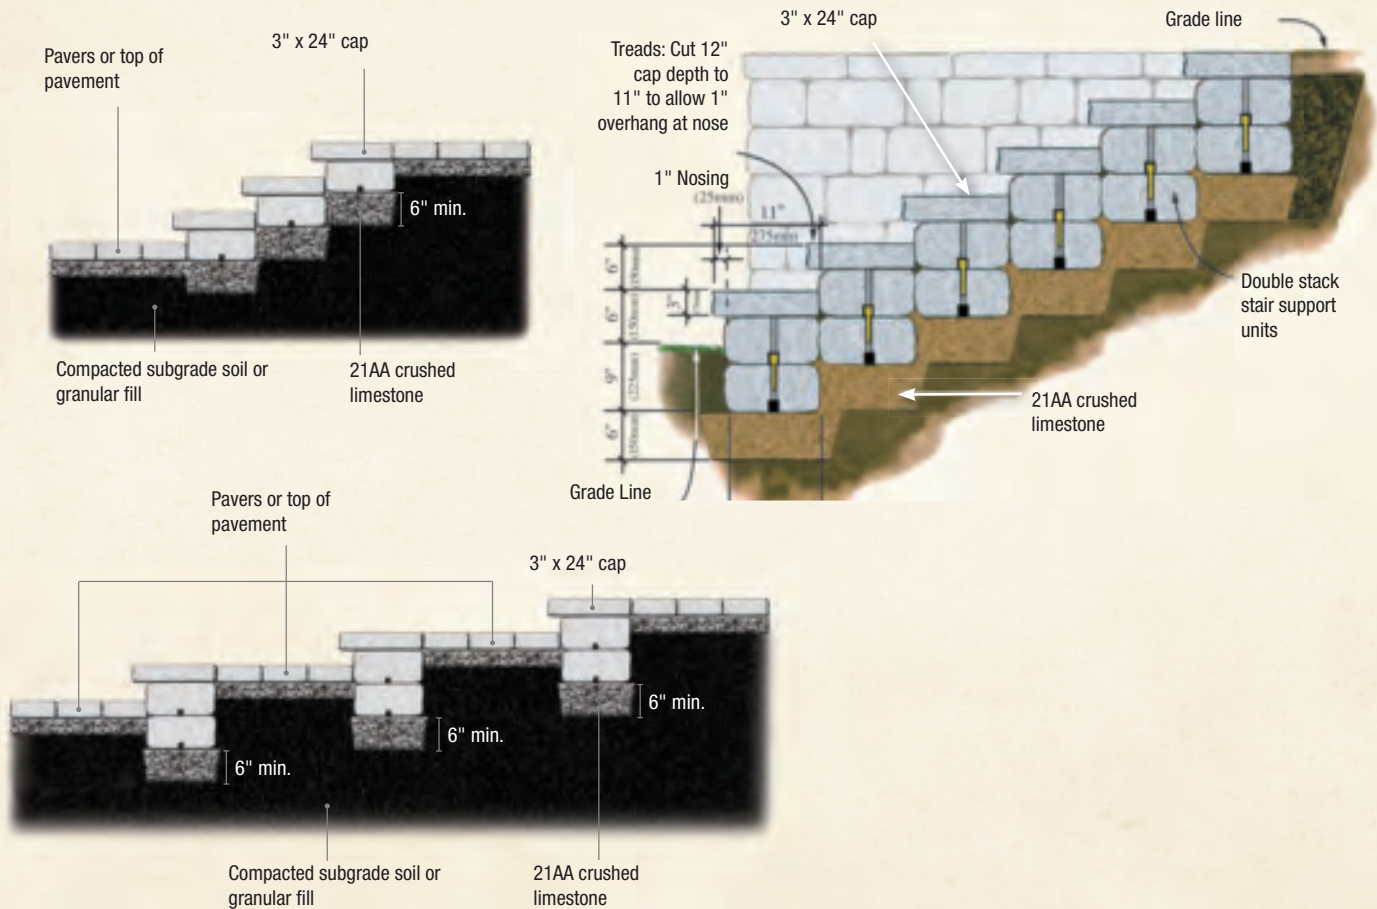

STONEGATE • PIERS

PIER AND PIER CAP DETAILS


20" Pier



20" Pier, 1st and odd numbered courses



20" Pier, 2nd and even numbered courses



Small Pier Cap: Size: 24" square
For 20" pier or center top cap of larger piers.

26" Pier



26" Pier, 1st and odd numbered courses



26" Pier, 2nd and even numbered courses



Cap for 26" Pier: Size: 30" square
Note: Leave 6" square in center open for plantings or cover with 24" pier cap.


30" Pier



30" Pier, 1st and odd numbered courses



30" Pier, 2nd and even numbered courses



Cap for 30" Pier: Size: 34" square
Note: Leave 10" square in center open for plantings or cover with 24" pier cap.


38" Pier



38" Pier, 1st and odd numbered courses



38" Pier, 2nd and even numbered courses



Cap for 38" Pier: Size: 42" square
Note: Leave 18" square in center open for plantings or cover with 24" pier cap. (24" pier cap for center may need to be glued at the joints ahead of time and allowed to set up prior to installation.)



STONEGATE • DESIGN DETAILS

DESIGN DETAILS

FREE-STANDING WALL APPLICATIONS


Column Corner

Similar to the "L" Return End wall detail, the Column Corner utilizes a 20" x 20" column geometry to develop an integrated pier at the end of a running wall. The detail offers visual aesthetic interest as well as provides strength at the termination end of the free-standing wall.

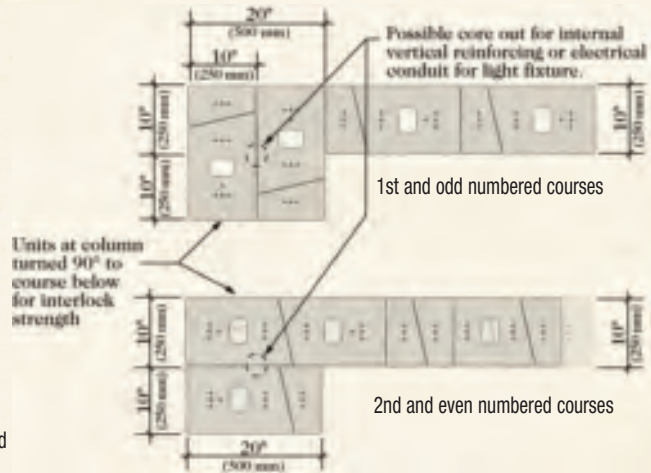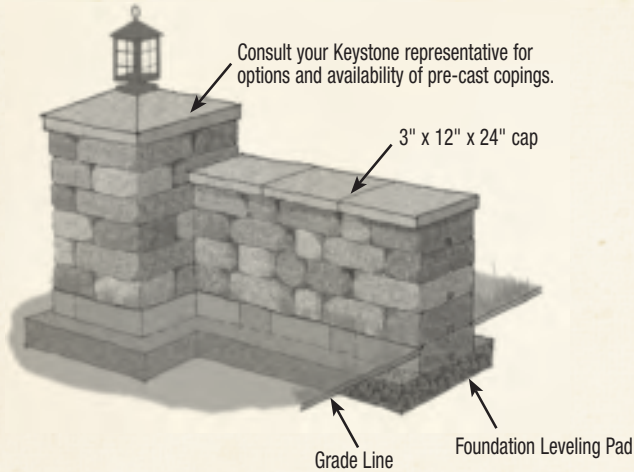

Wall End Column

The Wall End column is a larger version of the "Column Corner" detail. The benefit of this design option is the development of internal reinforcement to provide for greater strength and height, along with a larger footprint dimension for aesthetic purposes.

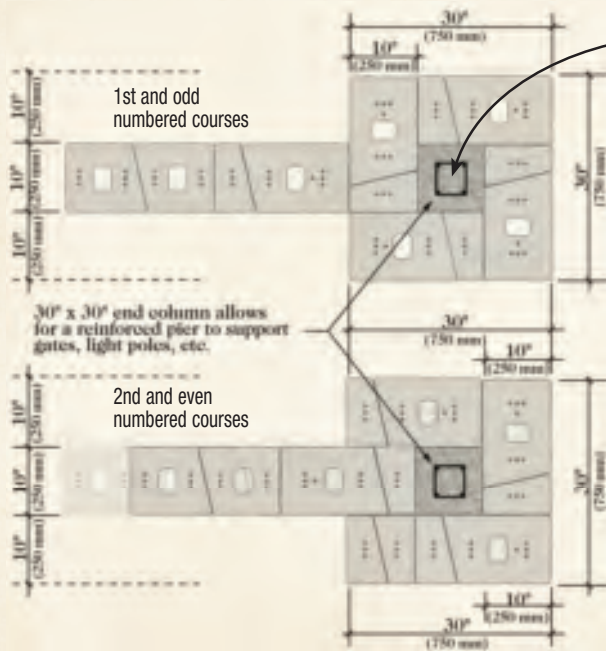


Internal column reinforcing should provide for steel rebar and solid concrete grouting in connection with a reinforced concrete foundation.

Optional capping pattern using Country Corner

Cut caps to fit against perpendicular surface


3" x 12" x 24" cap

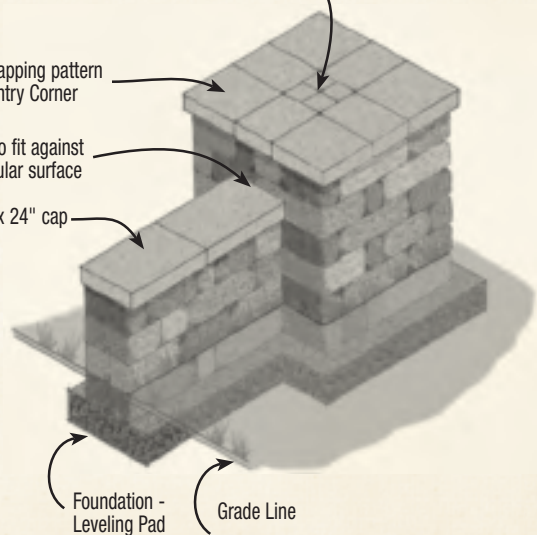


STONEGATE • DESIGN DETAILS

DESIGN CONSIDERATIONS


Gravity Wall – Near Vertical Detail

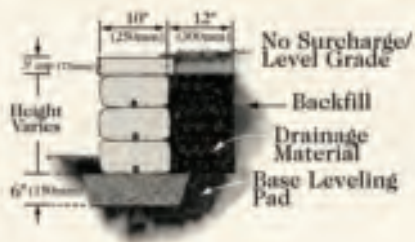


Gravity Wall – Setback Detail 9.5° + Batter

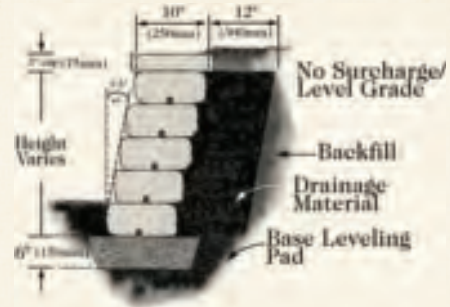

Reinforced Wall – Near Vertical Detail

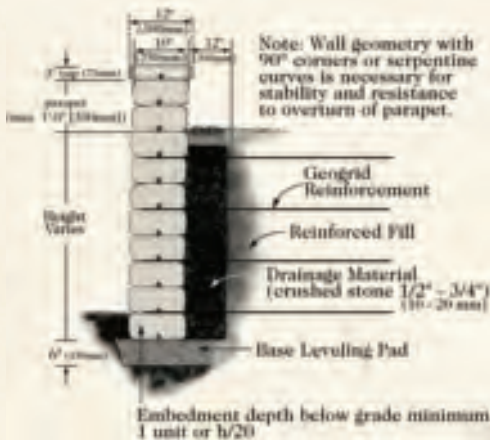

Reinforced Wall – Setback Detail 9.5° + Batter

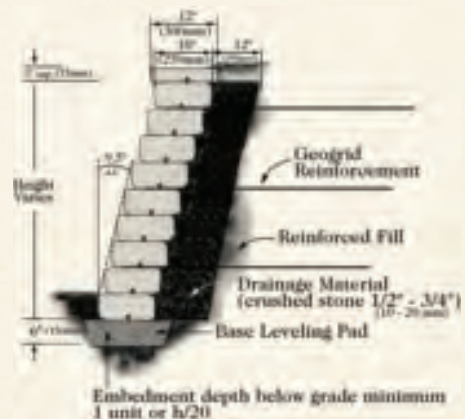

| GRAVITY WALLS (maximum unreinforced wall height) | | | | |
|--|------------------|------------------|------------------|------------------|
| Maximum Height | Near Vertical | | 9.5° +/- Batter | |
| | Level | 3H:1V | Level | 3H:1V |
| SAND/GRAVEL PHI = 34° | 2'-0" (0.6m) | 1'-6" (0.45m) | 3'-0" (0.9m) | 2'-6" (0.75m) |
| SILTY SAND PHI = 34° | 1'-6" (0.45m) | 1'-6" (0.45m) | 2'-6" (0.75m) | 2'-0" (0.6m) |
| SILT/LEAN CLAY PHI = 26° | 1'-6" (0.45m) | 1'-0" (0.3m) | 2'-0" (0.6m) | 1'-6" (0.45m) |

DESIGN NOTES

- Friction angle (PHI) for earth pressure calculations is min. 28° max. 32°
- Moist weight of all soil types is 120 lbs./ft.³ (19kN/m²)
- Sliding calculations use 6" (150mm) crushed stone leveling pad as compacted foundation material
- All backfill materials are compacted to 95% maximum density
- The term "vertical" implies a wall built to a near vertical alignment with a slight positive setback
- The information provided herein is for preliminary design use only. A qualified engineer should be consulted for design and analysis of structures. Keystone Retaining Wall Systems, Inc. assumes no liability for the improper use of these tables

REINFORCED WALLS — Vertical

GEGRID: Per manufacturer recommendation.

For walls above 4'-6", use of battered pin position is recommended

REINFORCED WALLS — Battered (9.5° +/- setback)

GEGRID: Per manufacturer recommendation.

Stonegate installation and design information reprinted by permission of Keystone Retaining Wall Systems, Inc.

KEYSTONE COMPACS

COMPAC 3 STRAIGHT SPLIT

Size 8" h x 18" w x 11" d
 Exposed face area 1 sq. ft. (8" x 18")
 Weight 77 lbs.
 Units per pallet 36 units
 Weight per pallet 2,772 lbs.



› INVENTORIED COLORS:
 WALNUT / LIMESTONE / RUSTIC / SAHARA /
 GREY / GRAPHITE



GREY



LIMESTONE

COMPAC HEWNSTONE

Size 8" h x 18" w x 11" d
 Exposed face area 1 sq. ft. (8" x 18")
 Weight 75 lbs.
 Units per pallet 36 units
 Weight per pallet 2,700 lbs.



› INVENTORIED COLORS:
 WALNUT / LIMESTONE / SAHARA / SLATE



CARBON BLEND

COMPAC CONTEMPORARY

Size 8" h x 18" w x 11" d
 Exposed face area 1 sq. ft. (8" x 18")
 Weight 75 lbs.
 Units per pallet 36 units
 Weight per pallet 2,700 lbs.



› INVENTORIED COLORS:
 WALNUT / LIMESTONE /
 CARBON BLEND



DESERT BROWN

COMPAC SCULPTURED SPLIT

Size 8" h x 18" w x 11" d
 Exposed face area 1 sq. ft. (8" x 18")
 Weight 77 lbs.
 Units per pallet 36 units
 Weight per pallet 2,772 lbs.



› INVENTORIED COLORS:
 ALL SPECIAL ORDER.

KEYSTONE COMPAC STRAIGHT SPLIT

WALLS: COMPAC STRAIGHT SPLIT – WALNUT BLEND
CAPS: UNIVERSAL CAPS – WALNUT BLEND



KEYSTONE COMPAC STRAIGHT SPLIT

WALLS: COMPAC 3 STRAIGHT SPLIT – GRAY
CAPS: UNIVERSAL CAP – GRAY




KEYSTONE COMPAC STRAIGHT SPLIT

WALLS: COMPAC – GRAPHITE BLEND
CAPS: UNIVERSAL CAP – SLATE




STANDARD COLORS


COMPAC UNITS



GRAY




RUSTIC BLEND



WALNUT BLEND



LIMESTONE BLEND



SAHARA BLEND

ELITE COLORS



GRAPHITE BLEND

KEYSTONE COMPAC STRAIGHT SPLIT

WALLS: COMPAC – GRAPHITE BLEND
CAPS: 3X24 SMOOTH CAP – SLATE



KEYSTONE COMPAC HEWNSTONE

WALLS: COMPAC HEWNSTONE – WALNUT BLEND
CAPS: 3/24 SMOOTH CAP – WALNUT BLEND



KEYSTONE COMPAC HEWNSTONE


- > TOP:
WALLS: COMPAC HEWNSTONE – WALNUT BLEND
CAPS: 3x24 SMOOTH CAP – WALNUT BLEND
- > BOTTOM:
PIER: COMPAC HEWNSTONE RETURN CORNER – SLATE



8" x 18" x 9" Hewnstone Return Corner


KEYSTONE COMPAC HEWNSTONE UNIT:

Size 8" h x 18" w x 11" d
 Exposed face area 1 sq. ft. (8" x 18")
 Weight 86 lbs.
 Units per pallet 36 units
 Weight per pallet 3,096 lbs.

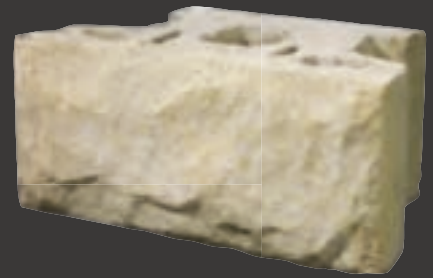


HEWNSTONE RETURN CORNER UNIT:


Size 8" h x 18" w x 9" d
 Weight 100 lbs.
 Units per pallet 30 units
 Weight per pallet 3,000 lbs.




WALNUT BLEND



LIMESTONE BLEND



SAHARA BLEND



SLATE

KEYSTONE COMPAC CONTEMPORARY

- › TOP:
WALL STONES – LOWER: COMPAC CONTEMPORARY – LIMESTONE BLEND
WALL STONES – UPPER: GLENSTONE – LIMESTONE BLEND
WALL CAPS: 3x24 CAP SMOOTH – SLATE
- › BOTTOM:
FIRE PIT: COMPAC CONTEMPORARY – LIMESTONE BLEND
CAP: 3x24 CAP SMOOTH – SLATE
PAVERS: HOLLAND 4x8 – WHITESTONE & JET BLACK
BORDER PAVERS: HOLLAND 4x8 – JET BLACK



KEYSTONE COMPAC SCULPTURED SPLIT

Like Keystone Straight Split, Keystone Sculptured Split wall stones offer a traditional and classic presentation. But you can add a creative flair with Keystone Sculptured Split wall stones. Turn any landscaping project — large or small — into a work of art!

KEYSTONE COMPAC
SCULPTURED SPLIT
(SPECIAL ORDER ONLY)

- RIGHT:
8" COMPAC SCULPTURED SPLIT – DESERT BROWN
- BELOW:
8" COMPAC SCULPTURED SPLIT – DESERT BROWN
- BELOW RIGHT:
8" COMPAC SCULPTURED SPLIT – DESERT BROWN



KEYSTONE STANDARDS



STRAIGHT SPLIT

(Available on Special Order Basis Only)

➤ WALNUT BLEND



SCULPTURED SPLIT

(Available on Special Order Basis Only)

➤ DESERT BROWN



8" STANDARD STRAIGHT SPLIT



Size 8"h x 18"w x 22"d
 Exposed face area 1 sq. ft. (8" x 18")
 Weight 127 lbs.
 Units per pallet 20 units
 Weight per pallet 2,540 lbs.

8" STANDARD SCULPTURED SPLIT



Size 8"h x 18"w x 22"d
 Exposed face area 1 sq. ft. (8" x 18")
 Weight 119 lbs.
 Units per pallet 20 units
 Weight per pallet 2,380 lbs.

8" 90° CORNER



Size 8"h x 18"w x 9"d
 Exposed face area 1 sq. ft. (8" x 18")
 Weight 86 lbs.
 Units per pallet 30 units
 Weight per pallet 2,580 lbs.

FIBERGLASS PIN



5-1/4" long
 1/2" diameter
 100 pins/box
 Two pins needed for each
 Mini, Compac and Standard

FIRE PIT BLOCK

> LEFT SIDE
 FIRE PIT: 4' FIRE PIT BLOCK – SLATE
 FIRE PIT CAP: 4' RADIUS GLENSTONE – SLATE
 PAVERS: HARBOR STONE – STERLING SMOKE
 ACCENT PAVERS: HOLLAND 4x8 – JET BLACK


> RIGHT SIDE
 FIRE PIT: 3' FIRE PIT BLOCK – WALNUT BLEND
 FIRE PIT CAP: 3' RADIUS GLENSTONE – SLATE
 PAVERS: HOLLAND SERIES – WALNUT BLEND
 ACCENT PAVERS: HOLLAND 4x8 – WHITESTONE




4' Fire Pit Block

3' Fire Pit Block


STANDARD COLORS



WALNUT BLEND



LIMESTONE BLEND



SLATE

These three colors stocked in:

- 3' Fire Pit Block
- 4' Fire Pit Block
- 4" Radius Cap Block

| FIRE PIT BLOCKS - BASE UNITS | | |
|------------------------------|------------------------|--------|
| 4 feet | Inside Circle Diameter | 3 feet |
| 5 1/2" | Height | 5 1/2" |
| 12 | Units per Course | 9 |
| 75 | Units per Pallet | 75 |
| 38.8 | Pounds per Unit | 37.8 |
| 2,910 | Pounds per Pallet | 2,835 |
| RADIUS - CAP UNITS | | |
| 4" | Height | 4" |
| 16 | Units per Course | 12 |
| 96 | Units per Pallet | 96 |
| 27.6 | Pounds per Unit | 27.6 |
| 2,645 | Pounds per Pallet | 2,650 |

OLD WORLD FIRE PIT BLOCK

> FIRE PIT: OLD WORLD FIRE PIT BLOCK – LIMESTONE BLEND
 FIRE PIT CAP: OLD WORLD 4" RADIUS GLENSTONE – LIMESTONE BLEND
 WALLS: OLD WORLD STONEGATE – LIMESTONE BLEND
 WALL ACCENT COURSE: OLD WORLD VINTAGE XLR – BURGUNDY BLEND
 PAVERS: OLD WORLD VINTAGE – LIMESTONE BLEND
 ACCENT PAVERS: OLD WORLD VINTAGE XLR – BURGUNDY BLEND




The installation of an optional metal ring may extend the life of the Fire Pit blocks.




> FIRE PIT: FIRE PIT BLOCK – LIMESTONE BLEND
 ACCENT COURSE: OLD WORLD VINTAGE XLR – SLATE
 FIRE PIT CAP: OLD WORLD 4" RADIUS GLENSTONE – LIMESTONE BLEND
 PAVERS: OLD WORLD VINTAGE – LIMESTONE BLEND

STANDARD COLORS



O.W. WALNUT BLEND



O.W. LIMESTONE BLEND



O.W. SLATE

These three colors stocked in:

O.W. 3' Fire Pit Block
 O.W. 4' Fire Pit Block
 O.W. 4" Radius Cap Block

COPING STONE

➤ POOL COPING: COPING STONE – WALNUT BLEND
PAVERS: OLD WORLD VINTAGE – SEASHELL

STANDARD COLORS



LIMESTONE BLEND



SLATE



WALNUT BLEND



WALL CAPS & STAIR TREADS

Inventoried Colors

12" x 12" COUNTRY CORNER CAP

- Chestnut
- Limestone Blend
- Sahara Blend
- Slate
- Walnut Blend
- Whitestone



12" x 12" COUNTRY CORNER CAP



UNIVERSAL CAP

Inventoried Colors

UNIVERSAL CAP

- Chestnut
- Graphite Blend
- Grey
- Limestone Blend
- Rustic Blend
- Sahara Blend
- Slate
- Walnut Blend

3" x 24" CAP SINGLE FACE SOFT SPLIT

- Limestone Blend
- Slate
- Walnut Blend



3" x 24" SINGLE FACE SOFT SPLIT CAP




3" x 24" ALL SMOOTH CAP

3" x 24" CAP ALL SMOOTH

- Chestnut
- Limestone Blend
- Rustic Blend
- Sahara Blend
- Slate
- Walnut Blend
- Whitestone

COPING STONE

- Limestone Blend
- Slate
- Walnut Blend

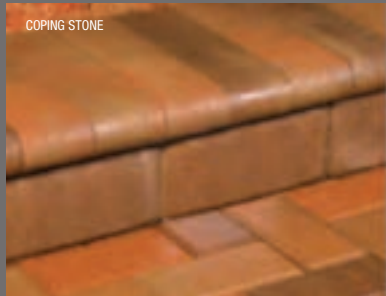

COPING STONE



STAIR TREAD

UNIVERSAL STAIR TREAD

(SPECIAL ORDER ONLY)

GLENSTONE BULLNOSE

LEFT TO RIGHT

- Sahara Blend
- Slate
- Limestone Blend
- Whitestone - *Special Order*
- Walnut Blend



GLENSTONE BULLNOSE



OLD WORLD GLENSTONE BULLNOSE

OLD WORLD GLENSTONE BULLNOSE

LEFT TO RIGHT

- Sahara Blend
- Slate
- Limestone Blend
- Whitestone - *Special Order*
- Walnut Blend

| | 12" x 12" Country Corner Cap | Universal Cap | 3" x 24" Soft Split Cap | 3" x 24" All Smooth Cap | Coping Stone | Stair Tread | Glenstone Bullnose |
|--------------------------|---------------------------------|-----------------------|----------------------------|----------------------------|------------------------------|-----------------------|--------------------|
| Size (inches) | 3"h x 12"w x 12"d | 3-1/2"h x 18"w x 12"d | 3"h x 24"w x 12"d | 3"h x 24"w x 12"d | 2-3/8"h x 3-7/8"w x 12-7/8"d | 3-1/2"h x 18"w x 20"d | 4"h x 8"w x 12"d |
| Weight per unit (lbs.) | 36 | 62 | 70.1 | 71.5 | 9.915 | 106 | 29.7 |
| Units per pallet | 96 | 56 | 48 | 48 | 117 | 28 | 96 |
| Weight per pallet (lbs.) | 3,456 | 3,472 | 3,365 | 3,432 | 1,160 | 2,968 | 2,858 |

WALL STONES — INVENTORIED COLORS AND SHAPES

| | ALABASTER | ANTIQUÉ BLEND | BURGUNDY BLEND | CARBON BLEND | CHESTNUT | GRAPHITE BLEND | GRAY | GREYSTONE | IRONWOOD | LIMESTONE BLEND | RUSTIC BLEND | SAHARA BLEND | SLATE | STERLING SMOKE BLEND | WALNUT BLEND | WHITESTONE |
|-------------------------------------|-----------|---------------|----------------|--------------|----------|----------------|------|-----------|----------|-----------------|--------------|--------------|-------|----------------------|--------------|------------|
| CAPS | | | | | | | | | | | | | | | | |
| 12x12 Cap (Smooth) | | | | | • | | | | | • | | • | • | | • | • |
| 3x24 Cap (Smooth) | | | | | • | | | | | • | • | • | • | | • | • |
| 3x24 Cap (Split Face One Face) | | | | | | | | | | • | | | • | | • | |
| Universal Cap | | | | | • | • | • | | | • | • | • | • | | • | |
| COMPAC SERIES - 8x18x11 | | | | | | | | | | | | | | | | |
| Contemporary (Smooth) | | | | • | | | | | | • | | | | | • | |
| Contemporary Return Corner | | | | • | | | | | | • | | | | | • | |
| Hewnstone | | | | | | | | | | • | | • | • | | • | |
| Hewnstone Return Corner | | | | | | | | | | • | | • | • | | • | |
| Sculptured Split | | | | | | | | | | | | | | | | |
| Straight Split | | | | | | • | • | | | • | • | • | | | • | |
| 90-Degree Return Corner 8x18x9 | | | | | | • | • | | | • | • | • | | | • | |
| FIRE PIT BLOCKS | | | | | | | | | | | | | | | | |
| Fire Pit - 4' | | | | | | | | | | • | | | • | | • | |
| Fire Pit – Old World (OW) - 4' | | | | | | | | | | • | | | • | | • | |
| Fire Pit - 3' | | | | | | | | | | • | | | • | | • | |
| Fire Pit – Old World (OW) - 3' | | | | | | | | | | • | | | • | | • | |
| GARDENWALL | | | | | | | | | | | | | | | | |
| | | • | | | | | • | | | • | • | | • | | • | |
| GLENSTONE SERIES | | | | | | | | | | | | | | | | |
| Glenstone | • | | • | | • | | | • | • | • | • | • | • | • | • | • |
| Glenstone – Old World (OW) | • | | • | | • | | | • | • | • | • | • | • | • | • | • |
| Glenstone Bullnose | | | | | | | | | | • | | • | • | | • | |
| Glenstone Bullnose – Old World (OW) | | | | | | | | | | • | | • | • | | • | |
| Glenstone Radius | | | | | | | | | | • | | | • | | • | |
| Glenstone Radius – Old World (OW) | | | | | | | | | | • | | | • | | • | |
| KEYSTONE STANDARD - 8x18x22 | | | | | | | | | | | | | | | | |
| STONEGATE SERIES - 6" | | | | | | | | | | | | | | | | |
| Stonegate 6" Contemporary (Smooth) | • | | | | | • | | | | • | • | • | • | | • | |
| Stonegate 6" – Old World (OW) | • | | | | | • | | | | • | • | • | • | | • | |
| VERAZZO STONE SERIES | | | | | | | | | | | | | | | | |
| Verazzo - 6" | | | | | • | • | | | | • | • | • | • | | • | |
| Verazzo 6" Return Corner | | | | | • | • | | | | • | • | • | • | | • | |

• = In Stock

FENDT LANDSCAPE WALL COLORS

Fendt offers a wide variety of colors and geometric shapes to meet your specific requirements. Don't see what you need? Fendt can custom manufacture any of the shapes shown, in any color your imagination desires. Your Fendt representative can also discuss Fendt's custom color and texture matching technology. Just bring us a brick or a portion of an existing retaining wall and we'll match the color and texture to add the perfect personalized finishing touch to any commercial or residential job.

GARDEN WALL COLORS




ANTIQUE BLEND



WALNUT BLEND



RUSTIC BLEND



LIMESTONE BLEND



SLATE




GRAY

VERAZZO COLORS



WALNUT BLEND




RUSTIC BLEND




LIMESTONE BLEND



SLATE



SAHARA BLEND



CHESTNUT



GRAPHITE (ELITE)


STONEGATE COLORS (Shown in Old World texture)




WALNUT BLEND



RUSTIC BLEND



LIMESTONE BLEND



SAHARA BLEND



SLATE




GRAPHITE




ALABASTER


COMPAC COLORS



GRAY




RUSTIC BLEND




SAHARA BLEND



WALNUT BLEND



LIMESTONE BLEND



GRAPHITE


GLENSTONE COLORS (Shown in Old World texture)




WALNUT BLEND




RUSTIC BLEND




BURGUNDY BLEND



SLATE



IRONWOOD




SAHARA BLEND



LIMESTONE BLEND




GREYSTONE



CHESTNUT



STERLING SMOKE



ALABASTER

BASIC PRODUCT INSTALLATION



The Keystone Retaining Wall System was developed with simplicity of construction in mind. The following steps will guide you from start to finish.

■ STEP 1: PREPARATION OF BASE LEVELING PAD

Excavate a shallow trench to the designed length and width dimensions for your Keystone wall. Provide 12" behind the Keystone unit to allow for a granular backfill drainage zone. Keystone units should be placed on a 6" leveling pad of compacted well draining fill (i.e., sand, 1/2" to 3/4" crushed stone or gravel) at 95% Standard Proctor compaction or equal. Provide additional trench depth for below grade placement of Keystone units on a ratio of 1" below grade for each 8" of wall height above grade.

■ STEP 2: INSTALLING THE BASE COURSE

Install the first course of Keystone units side by side over the prepared base. Level each unit side to side and front to back. Place the units such that the kidney-shaped void is on the bottom surface. Line up pins or back edge of the unit for straight wall alignment. Units should touch side point to side point as diagrammed.

■ STEP 3: INSTALLING THE INTERLOCKING PINS

Place the reinforced fiberglass pins into the paired holes in each Keystone unit. Provide pins of correct length for appropriate unit size. Once in place, the pins will allow an automatic setback when installing additional courses as per STEP 5.

■ STEP 4: INSTALLING BACKFILL AND COMPACTION

Fill all voids in and between Keystone units and behind units 12". This fill should consist of 1/2" to 3/4" crushed stone or clean, well-draining granular fill. This allows for water drainage and compacts easily. Compact to eliminate potential settlement. Backfill behind gravel drainage zone using existing soils. (NOTE: Heavy clays or organic soils are not recommended due to water holding properties.) Compact to 95% Standard Proctor. Backfill in 8" lifts on a course basis. **NOTE:** Only lightweight walk-behind mechanical compaction equipment should sweep the units to remove small pebbles, debris, etc., so the units rest evenly upon one another. Backfill and compact at every 8" course.

■ STEP 5: INSTALLING ADDITIONAL COURSES

Place the next course of Keystone units over the positioned fiberglass pins so they are centered on and will bridge two units below in a running bond pattern. Pins should fit into kidney-shaped recesses on bottom of units. Pull the Keystone module toward the face of the wall until the module makes full contact with both pins. Repeat STEPS 3, 4, and 5.

■ STEP 6: INSTALLING KEYSTONE CAPS

Use Keystone cap units to complete your wall. Place the Keystone cap over the projecting pins on the unit below. Pull forward to the automatic set back position. Backfill and compact to finish grade. **NOTE:** In areas of high public accessibility and vandalism, we recommend construction adhesive or epoxy cement be used around the perimeter underside of the cap prior to unit placement.

The above installation guidelines apply to all Keystone unit sizes. These installation procedures do not take into account geological variations in site and soil conditions and, therefore, may require engineering consideration and detail. The final design and construction of a wall is the responsibility of the owner, not Fendt Builder's Supply, Inc., or Keystone Wall Systems, Inc.

GEOGRID INSTALLATION (PATENTED PROCEDURES)

For taller, more critical walls where geogrid is required to resist greater lateral earth pressures, use the following steps for installation:

STEP 1: Follow steps 1 through 4 of BASIC PRODUCT INSTALLATION.

STEP 2: Excavate the reinforced soil area to the maximum embedment length.

STEP 3: Cut sections of geogrid off roll to the specified length. Place geogrid in proper orientation (i.e., roll out from wall toward embankment). Check manufacturer's criteria for biaxial or uniaxial geogrids.


STEP 4: Hook geogrid over Keystone fiberglass pins, assuring a secure connection between unit and geogrid.

STEP 5: To pretension geogrid, pull the pinned geogrid taut to eliminate loose folds. Stake or secure back edge of the geogrid prior to and during backfill and compaction.

STEP 6: Install the next course of Keystone retaining wall units.




STEP 7: Proceed to place compacted backfill over geogrid in 8" lifts. Provide minimum 6" soil coverage prior to driving equipment over grid. Avoid tracked or wheeled vehicles directly on grid, or turning on grid.

STEP 8: Continue steps 3 through 7 until the retaining wall is complete.

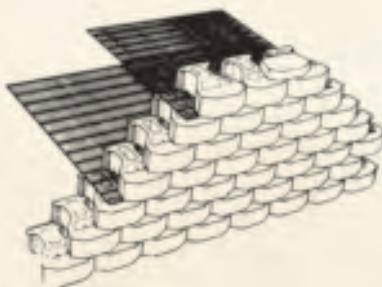


Miter Cutting Universal Cap Units to Cap Inside and Outside 90° Corners

Outside Corner

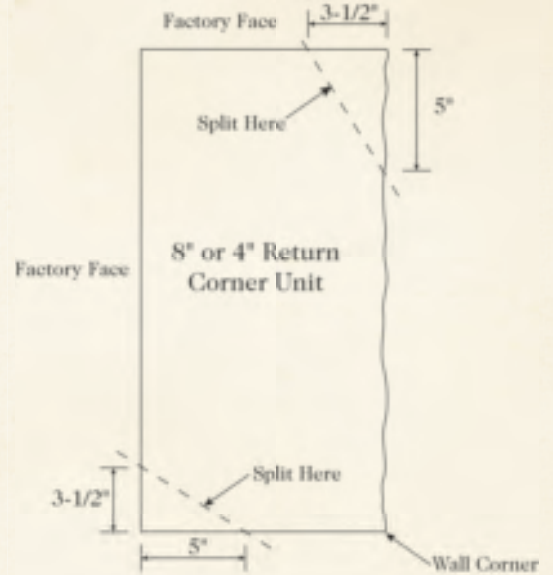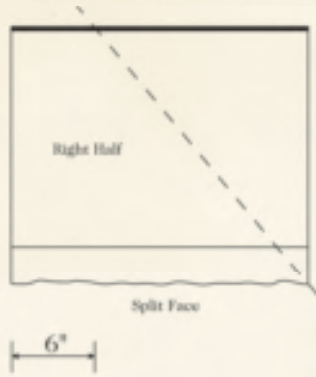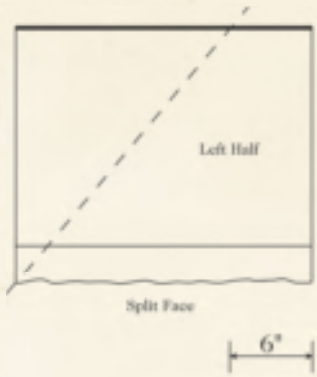


Split Locations for 90 Degree Corners in Sculptured Rock Faced Walls

Inside Corner



STEP OPTIONS:

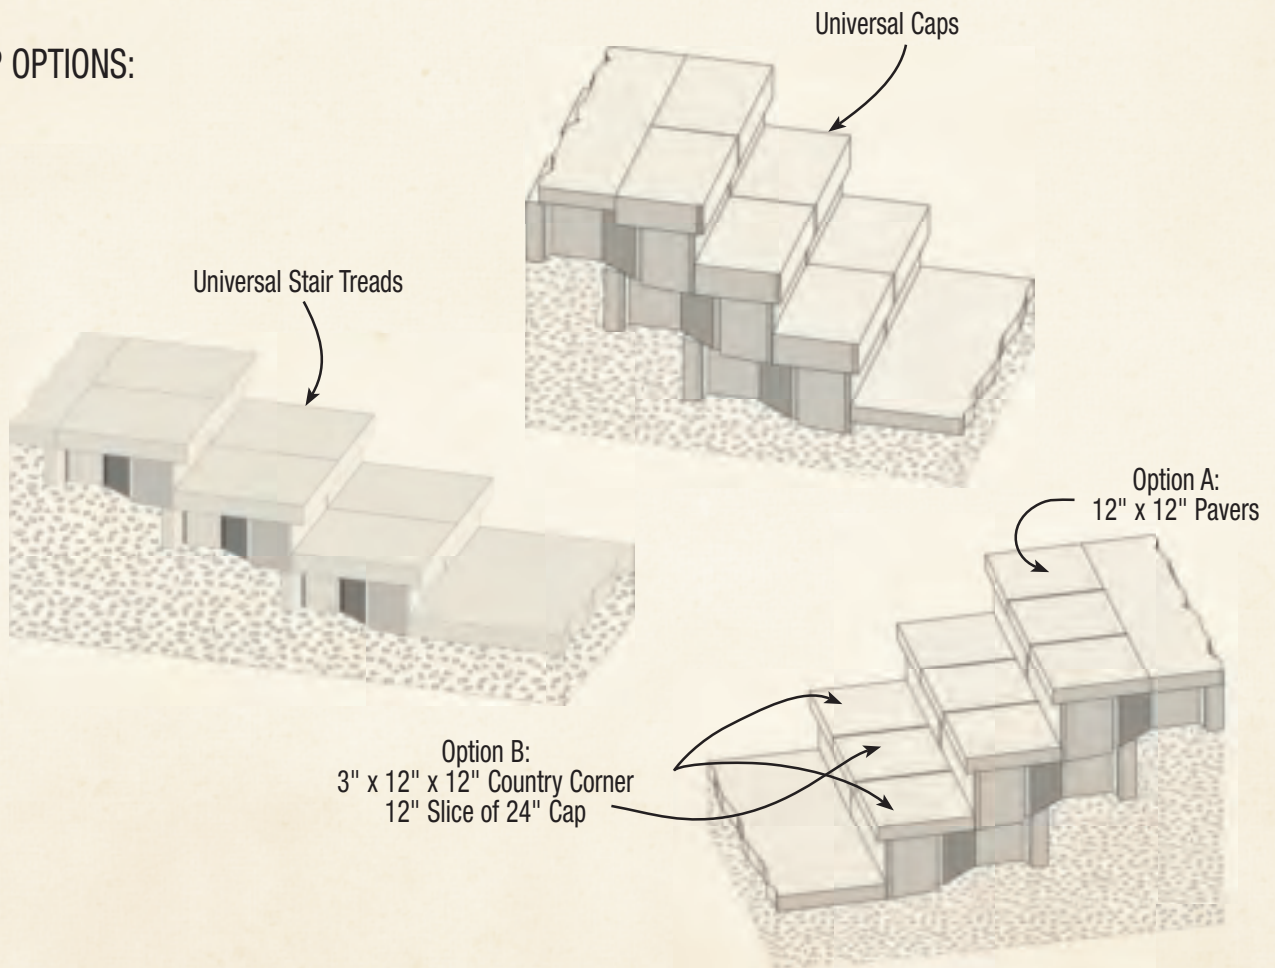

CURVES AND CORNERS


CONCAVE CURVES INSTALLATION PROCEDURES:

1. Follow standard installation instructions for preparation of the subgrade and the leveling pad.
2. Overlap the corners of the base course. The amount of overlap will vary based on the size of the curve. Gapping will occur as the units batter or move away from the point of radius. The rate of gapping is controlled by the severity of the batter (i.e., a 1:8 batter will gap more quickly than a 1:128 batter). The distance between the pin holes of adjacent first course units should not exceed 12" on center. For best visual appearance, a maximum 1/2" to 3/4" gap is recommended.
3. Follow standard installation instructions for backfilling and placement of additional courses.
4. If geogrid reinforcement is used, refer to manufacturer's recommendations for proper placement of this material along concave curves and corners.
5. Depending on wall height, radius and batter selection, some gapping between units may occur. If gaps exceed acceptable limits, redrill new pin holes as needed, using a 5/8" masonry bit, and realign units to close the gaps.




CONVEX CURVES INSTALLATION PROCEDURES

1. Follow standard installation instructions for preparation of subgrade and leveling pad.
2. Place base course units with a small gap between adjacent units. This gap will close with the placement of each additional course of Keystone units as the units batter and converge toward the point of radius. The rate of closure is controlled by the severity of the batter (i.e., a 1:8 batter will close more quickly than a 1:128 batter). A maximum of 1/2"-3/4" gap is recommended for best visual appearance. To achieve this, the distance between the pin holes on adjacent first course units should not exceed 12" on center.
3. Follow standard installation instructions for backfilling and placement of additional courses.
4. If geogrid reinforcement is used, refer to manufacturer's recommendations for proper placement of this material along convex curves.
5. Depending on wall height, radius and batter selection, some binding between units may occur. If this prohibits proper placement of additional units, try one of the following suggestions:
 - Trim unit corners using either a masonry chisel or concrete saw.
 - Push units back and realign. Redrill pin holes as needed using a 5/8" masonry bit.

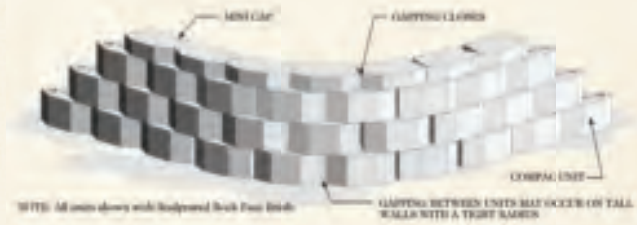

90° OUTSIDE CORNER

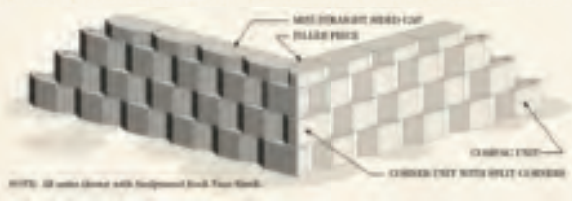


90° INSIDE CORNER - ROUNDED




GRAVITY WALL DESIGN CHARTS

NEAR VERTICAL WALL

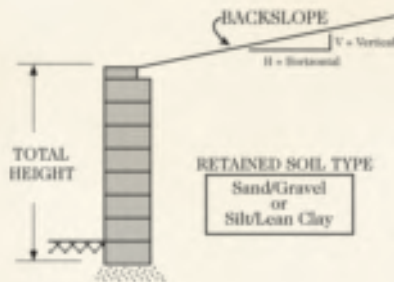

ONE INCH SETBACK WALL

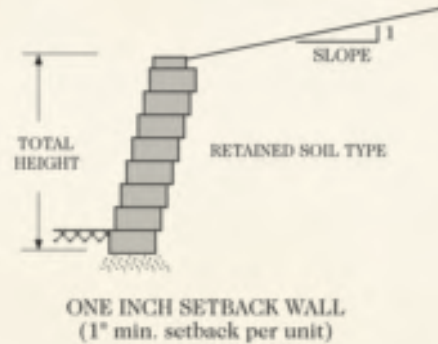

STANDARD UNITS

| MAXIMUM GRAVITY WALL HEIGHT CHART | | | | |
|-----------------------------------|-------------|-------------|-------------|-------------|
| Near Vertical Wall | Backslope | | | |
| | Level | 4H:1V | 3H:1V | 2H:1V |
| Soil Type | Level | 4H:1V | 3H:1V | 2H:1V |
| Sand/Gravel | 5.2' (1.6m) | 4.7' (1.5m) | 4.6' (1.4m) | 4.1' (1.2m) |
| Silty Sand | 4.7' (1.4m) | 4.3' (1.3m) | 4.1' (1.2m) | 3.6' (1.1m) |
| Silt/Lean Clay | 4.4' (1.3m) | 3.9' (1.2m) | 3.7' (1.1m) | 2.9' (0.9m) |

COMPAC UNITS

| MAXIMUM GRAVITY WALL HEIGHT CHART | | | | |
|-----------------------------------|--------------|--------------|--------------|--------------|
| Near Vertical Wall | Backslope | | | |
| | Level | 4H:1V | 3H:1V | 2H:1V |
| Soil Type | Level | 4H:1V | 3H:1V | 2H:1V |
| Sand/Gravel | 2.9' (0.9m) | 2.3' (0.71m) | 2.3' (0.71m) | 2.3' (0.71m) |
| Silty Sand | 2.3' (0.71m) | 2.3' (0.71m) | 1.7' (0.51m) | 1.7' (0.51m) |
| Silt/Lean Clay | 2.3' (0.71m) | 1.7' (0.51m) | 1.7' (0.51m) | 1.0' (0.30m) |

STANDARD UNITS

| MAXIMUM GRAVITY WALL HEIGHT CHART | | | | |
|-----------------------------------|-------------|-------------|-------------|-------------|
| Near Vertical Wall | Backslope | | | |
| | Level | 4H:1V | 3H:1V | 2H:1V |
| Soil Type | Level | 4H:1V | 3H:1V | 2H:1V |
| Sand/Gravel | 6.8' (2.1m) | 6.2' (1.9m) | 5.9' (1.8m) | 5.3' (1.6m) |
| Silty Sand | 6.1' (1.9m) | 5.5' (1.7m) | 5.2' (1.6m) | 4.4' (1.3m) |
| Silt/Lean Clay | 5.3' (1.6m) | 4.5' (1.4m) | 4.1' (1.2m) | 3.2' (1.0m) |

COMPAC UNITS (1" SETBACK OPTION AVAILABLE IN STRAIGHT FACE AND HEWNSTONE UNITS ONLY)

| MAXIMUM GRAVITY WALL HEIGHT CHART | | | | |
|-----------------------------------|---------------|---------------|---------------|----------------|
| Near Vertical Wall | Backslope | | | |
| | Level | 4H:1V | 3H:1V | 2H:1V |
| Soil Type | Level | 4H:1V | 3H:1V | 2H:1V |
| Sand/Gravel | 3.67' (1.20m) | 3.67' (1.20m) | 3.00' (0.91m) | 3.00' (0.91m) |
| Silty Sand | 3.00' (0.91m) | 3.00' (0.91m) | 3.00' (0.91m) | 2.33' (0.71m) |
| Silt/Lean Clay | 3.00' (0.91m) | 2.33' (0.71m) | 2.33' (0.71m) | <1.00' (0.30m) |

GEOGRID CHART NOTES

The Keystone geogrid charts are graphically presented to show the proper orientation and lengths of geogrids used with Standard and Compac Units at the near vertical batter.

Heights were set in two-block increments beginning at 4.3' and ending at 11'. Engineering judgement should be used when interpolating between heights. Heights under the 4.3' height shown may require geogrid reinforcement depending upon the units used, soil types and surcharge loadings.

Soil ranges were selected to approximate good, medium and poor soil conditions to concisely cover the typical design range. Wall height is the total height of the wall from leveling pad to the top of the wall. The charts assume the use of a lower strength geogrid, and can be used safely with the following materials:


- Synten SF35
- Stratagrid 200 by Strata Systems
- Mirafi 3XT

All geogrid lengths shown are the actual lengths of geogrids required as measured from the connection points to the end of the geogrid.

The design charts assume that the walls are constructed in accordance with Keystone specifications and good construction practice. All soils must be compacted in 8" lifts to 95% Standard Proctor density as determined by laboratory testing.

The information contained in the design charts is for preliminary design use only. A qualified professional should be consulted for final design assistance. Keystone accepts no liability for the improper use of these charts.

DESIGN CHARTS FOR KEYSTONE COMPAC

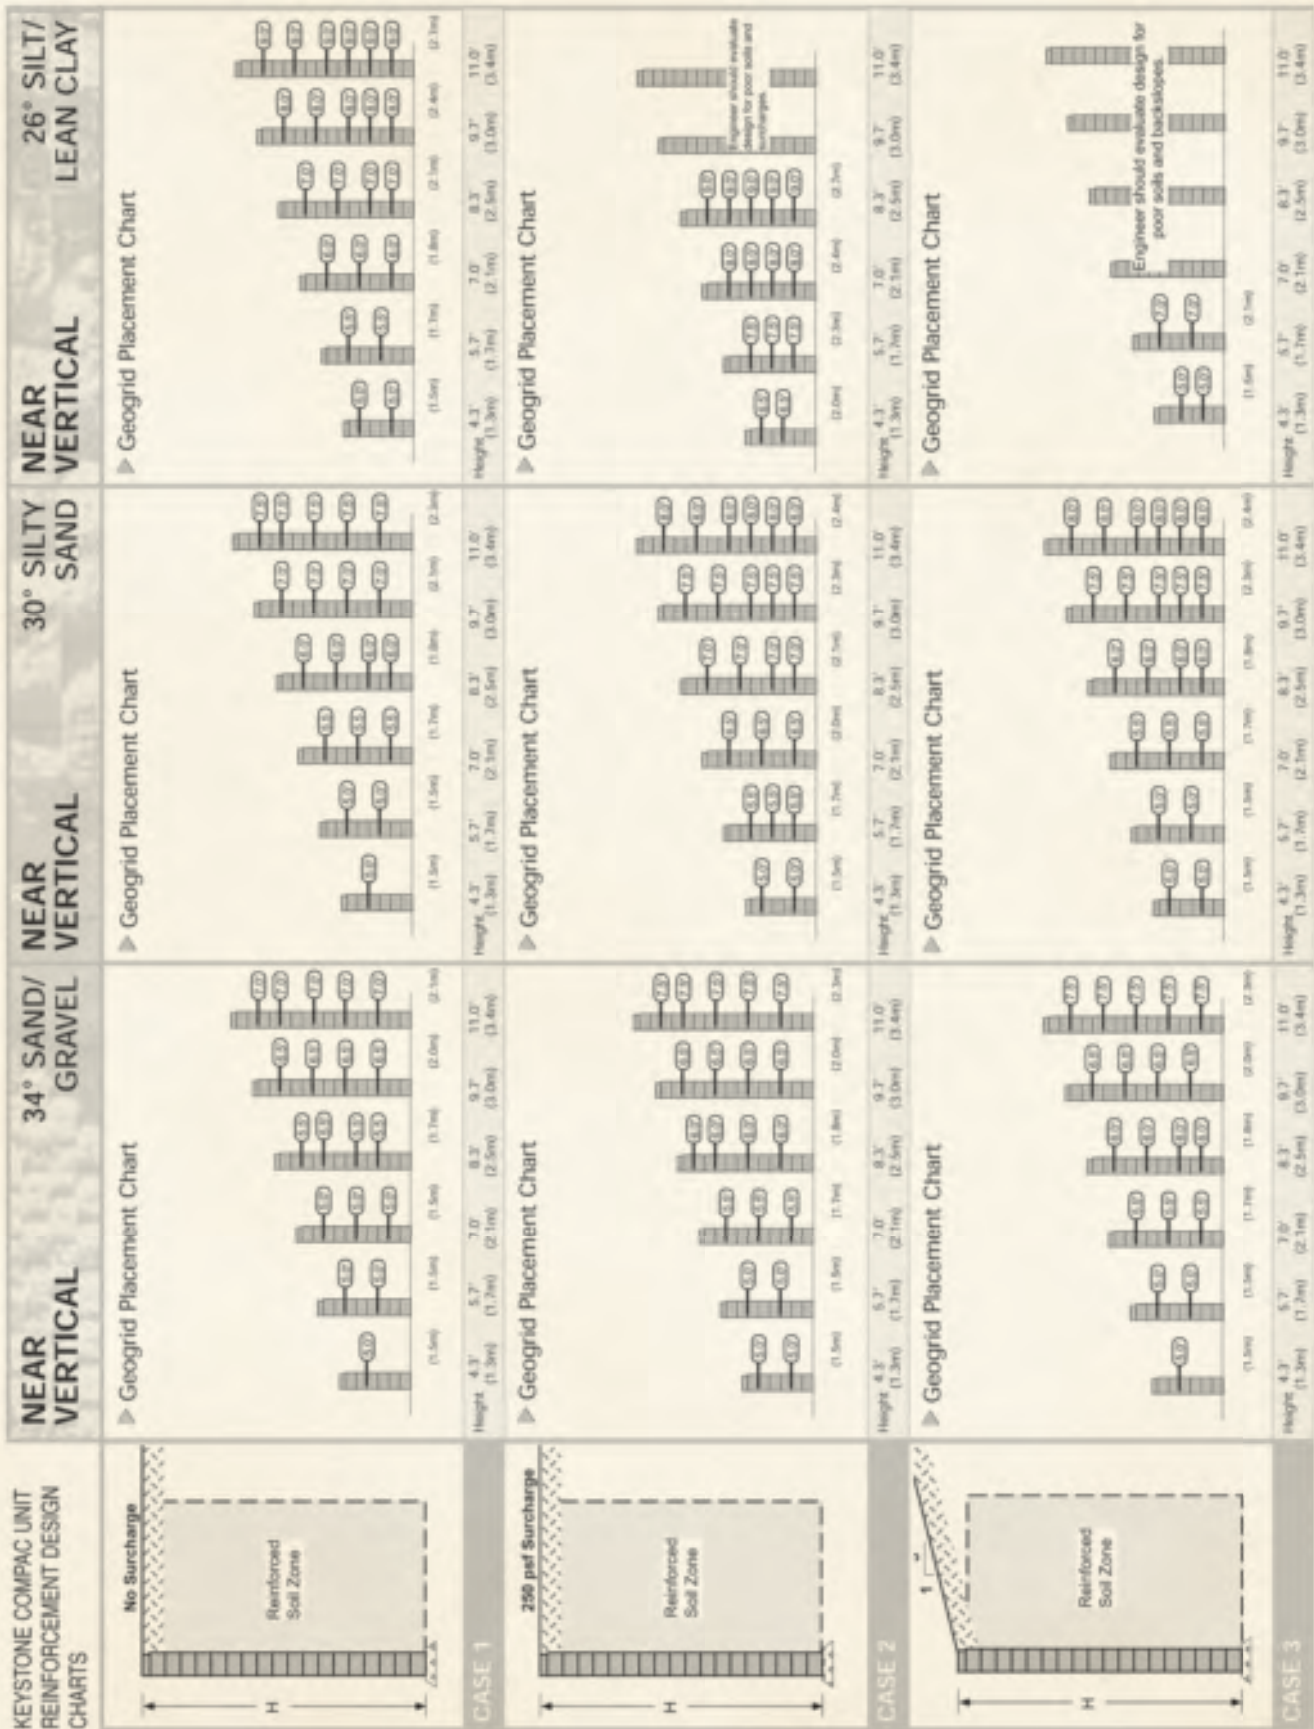

PAVER & WALL STONE REFERENCE GUIDE

| INVENTORIED PAVERS | Description | Units Per Sq. Ft. | Sq. Ft. Per Cube | Units Per Cube | Weight Per Sq. Ft. | Weight Per Cube | Sq. Ft. Per Strap |
|--|-----------------------------|--------------------------|-------------------------|-----------------------|---------------------------|------------------------|--------------------------|
| Holland 4" x 8" | 2-3/8" Thick | 4.5 | 108 | 486 | 28 | 3,024 | 18 |
| Holland 8" x 8" | 2-3/8" Thick | 2.25 | 96 | 216 | 28 | 2,688 | 16 |
| Holland 12" x 12" | 2-3/8" Thick | 1 | 72 | 72 | 28 | 2,016 | 18 |
| Harbor Stone & Bay Stone | | | | | | | |
| Mega Large Rectangle | 9-1/2" x 14-1/4" x 2-3/8" | 1.06 | 90 | 96 | 28 | 2,688 | 30 |
| Large Square | 9-1/2" x 9-1/2" x 2-3/8" | 1.6 | 97 | 160 | 28 | 2,716 | 19.4 |
| Extra Large Rectangle | 9-1/2" x 4-3/4" x 2-3/8" | 3.1 | 90 | 280 | 28 | 2,509 | 17.92 |
| Vintage Series - Circle Cube | | | | | | | |
| Square | 4-3/4" x 4-3/4" x 2-3/8" | 6.3 | 8.85 | 56 | 28 | — | — |
| Large Circle | 4-11/16" x 4-5/16" x 2-3/8" | 8.3 | 14.45 | 120 | 28 | — | — |
| Small Circle | 4-11/16" x 4-5/16" x 2-3/8" | 8.7 | 1.8 | 16 | 28 | — | — |
| Half Stone | 4-3/4" x 3-5/8" x 2-3/8" | 8.4 | 10.0 | 84 | 28 | — | — |
| Center Stone | 4-3/4" x 3-5/8" x 2-3/8" | 9 | 0.4 | 4 | 28 | — | — |
| Totals For Cube | | | 35.5 | 280 | | 994 | |
| Vintage Series - Square & Small Rectangle Cube | | | | | | | |
| Square | 4-3/4" x 4-3/4" x 2-3/8" | 6.3 | 68.6 | 432 | 28 | — | — |
| Small Rectangle | 4-3/4" x 2-7/16" x 2-3/8" | 12.6 | 11.4 | 144 | 28 | — | — |
| Totals For Cube | | | 80 | 576 | | 2,240 | |
| Vintage Large Rectangle Cube | 7-1/8" x 4-3/4" x 2-3/8" | 4.2 | 80 | 336 | 28 | — | 13.33 |
| Old World Holland | 2-3/8" Thick | 4.5 | 108 | 486 | 28 | 3,024 | — |
| Old World Vintage | 2-3/8" Thick | — | 80 (Square Cube) | 504 | 28 | 2,240 | — |
| | 2-3/8" Thick | — | 80 (Lg. Rectangle Cube) | 336 | 28 | 2,240 | — |
| | 2-3/8" Thick | — | 90 (XL Rectangle Cube) | 280 | 28 | 2,509 | — |
| | 2-3/8" Thick | — | 91 (DL Rectangle Cube) | 200 | 28 | 2,548 | — |
| | 2-3/8" Thick | — | 97 (Lg. Square Cube) | 160 | 28 | 2,716 | — |
| Old World Vintage Circle | 2-3/8" Thick | — | 35.5 (Crate) | — | 28 | 994 | — |
| SPECIAL ORDER PAVERS | | | | | | | |
| Arrowhead™ | 2-3/8" Thick | 4.8 | 78.75 | 378 | 28 | 2,205 | 11.25 |
| Euro Stone (Use With Arrowhead) | 2-3/8" Thick | 3.7 | 102 | 378 | 28 | 2,856 | 14.57 |
| Carousel Series - Circle Cube | | | | | | | |
| Square | 4-1/2" x 4-1/2" x 2-3/4" | 7.11 | 27.84 | 198 | 33 | — | — |
| Small Rectangle | 4-1/2" x 2-1/4" x 2-3/4" | 14.12 | .84 | 12 | 33 | — | — |
| Large Circle | 4-1/2" x 4-1/2" x 2-3/4" | 8.3 | 23.10 | 192 | 33 | — | — |
| Small Circle | 3-3/8" x 4-1/2" x 2-3/4" | 11.43 | 1.56 | 18 | 33 | — | — |
| Totals For Cube | | | 53.34 | 420 | | 1,760 | — |
| Carousel Series - Square & Small Rectangle Cube | | | | | | | |
| Square | 4-1/2" x 4-1/2" x 2-3/4" | 7.11 | 53.16 | 378 | 33 | — | — |
| Small Rectangle | 4-1/2" x 2-1/4" x 2-3/4" | 14.12 | 3.84 | 54 | 33 | — | — |
| Totals For Cube | | | 57 | | | 1,881 | |
| Carousel Series - Large Rectangle Cube | | | | | | | |
| Large Rectangle | 4-1/2" x 6-3/4" x 2-3/4" | 4.8 | 80 | 384 | 33 | | 13.33 |
| Cobblestone | 2-3/8" Thick | 3.5 | 103 | 360 | 28 | 2,884 | 20.6 |
| Holland 4" x 4" | 2-3/8" Thick | 4.5 | 108 | 486 | 28 | 3,024 | 18 |
| Holland 8" x 8" | 3-1/8" Thick | 2.25 | 74.67 | 168 | 37 | 2,763 | — |
| Holland 4" x 8" | 3-1/8" Thick | 4.5 | 84 | 378 | 37 | 3,108 | 16 |
| Old World Holland 8" x 8" | 3-1/8" Thick | 2.25 | 74.67 | 168 | 37 | 2,763 | — |
| Old World Holland 4" x 8" | 3-1/8" Thick | 4.5 | 84 | 378 | 37 | 3,108 | — |
| Old World Arrowhead | 2-3/8" Thick | 4.8 | 78.75 | 376 | 28 | 2,205 | — |
| Old World Random | 2-3/8" Thick | — | 96 | 288 | 28 | 2,407 | — |
| Old Style Symetry (Use In Combination With Euro Stone) | 2-3/8" Thick | 3.1 | 93 | 288 | 28 | 2,604 | 23.25 |
| ENVIRONMENTAL PRODUCTS | | | | | | | |
| Eco-Brick | 3-1/8" Thick | 3.68 | 76.3 | — | — | 2,592 | — |
| Eco-Classic/O.W. Eco-Classic | 3-1/8" Thick | 3.68 | 76.3 | — | — | 2,719 | — |
| Geolink | 4"h x 12"w x 16"l | 1.12 | 32 | 36 | 36.6 | 1,469 | — |
| Monoslab® Grass Paver | 4-1/2"h x 16"w x 24"l | 0.38 | 95.76 | 36 | 31.65 | 3,031 | — |

| | Description | Units Per Sq. Ft. | Sq. Ft. Per Cube | Units Per Cube | Weight Per Sq. Ft. | Weight Per Cube | Sq. Ft. Per Strap |
|--|--------------------------|-------------------|------------------|----------------|--------------------|-----------------|-------------------|
| SPECIAL ORDER PAVERS (Continued) | | | | | | | |
| Symetry® | 2-3/8" Thick | 3.4 | 84 | 288 | 28 | 2,352 | 21 |
| 6" x 6" (Use With Symetry) | 2-3/8" Thick | 4.1 | 92 | 378 | 28 | 2,576 | 13.14 |
| Symetry® | 3-1/8" Thick | 3.4 | 65 | 224 | 37 | 2,405 | 18 |
| 6" x 6" (Use In Combination With Symetry) | 3-1/8" Thick | 4.1 | 71.4 | 294 | 37 | 2,642 | 18 |
| Durastone | 2-3/8" Thick | 3.6 | 100 | 360 | 28 | 2,800 | 20 |
| | 3-1/8" Thick | 3.6 | 78 | 280 | 37 | 2,886 | — |
| Omnistone | 2-3/8" Thick | 3.5 | 103 | 360 | 28 | 2,884 | 20.6 |
| Honeycomb | 2-3/8" Thick | 3.1 | 87 | 270 | 28 | 2,436 | 14.5 |
| Plazastone | 2-3/8" Thick | 2.73 | 89 | 243 | 28 | 2,492 | 17.8 |
| Vintage Extra Large Rectangle Cube | 9-1/2" x 4-3/4" x 2-3/8" | 3.1 | 90 | 280 | 28 | 2,509 | 17.92 |
| Vintage Double Large Rectangle Cube | 7-1/8" x 9-1/2" x 2-3/8" | 2.2 | 91 | 200 | 28 | 2,548 | — |
| Vintage Large Square Cube | 9-1/2" x 9-1/2" x 2-3/8" | 1.6 | 97 | 160 | 28 | 2,716 | — |

| INVENTORIED WALL STONES | Size | Exposed Face Area | Weight (lbs.) | Units Per Cube | Weight Per Cube (lbs.) | Linear Foot Coverage |
|--|---|-----------------------------|---------------|----------------|------------------------|-------------------------|
| Compac Units | | | | | | |
| Compac 3 Straight Split | 8"h x 18"w x 11"d | 1 Sq. Ft. (8" x 18") | 79 | 36 | 2,844 | 1.5 l.f. |
| 8" 90° Split Return Corner | 8"h x 18"w x 9"d | 1 Sq. Ft. (8" x 18") | 86 | 30 | 2,580 | — |
| Compac Hewnstone | 8"h x 18"w x 11"d | 1 Sq. Ft. (8" x 18") | 86 | 36 | 3,096 | 1.5 l.f. |
| Compac Contemporary | 8"h x 18"w x 11"d | 1 Sq. Ft. (8" x 18") | 79 | 36 | 2,844 | 1.5 l.f. |
| 8" Contemporary & Hewn Return Corner | 8"h x 18"w x 9"d | 1 Sq. Ft. (8" x 18") | 100 | 30 | 3,000 | — |
| Garden Wall | 4"h x 12"w x 8"d | 1/3 Sq. Ft. (4" x 12") | 25 | 96 | 2,352 | 1 l.f. |
| Glenstone/O.W. Glenstone | 4"h x 12"w x 8"d | 1/3 Sq. Ft. (4" x 12") | 32 | 96 | 3,072 | — |
| 3' Radius Glenstone/O.W. Glenstone | 4"h x 13-3/8"/9-1/8"w x 8"d | 1/3 Sq. Ft. (4" x 12") | 28 | 96 | 2,650 | — |
| 4' Radius Glenstone/O.W. Glenstone | 4"h x 12-1/4"/9-1/8"w x 8"d | 1/3 Sq. Ft. (4" x 12") | 28 | 96 | 2,645 | — |
| Glenstone/O.W. Glenstone Bullnose | 4"h x 8"w x 12"d | 0.22 Sq. Ft. (4" x 8") | 29.7 | 96 | 2,858 | 0.67 l.f. |
| Stonegate/O.W. Stonegate | | | | | | |
| 6" Large Unit | 6"h x 10"d x 16"/14"w | 1 Set = 1.4 Sq. Ft. Max. | 66 | 20 Sets/Cube | 2,928 | 1 Set = 2.5 l.f. Max. |
| 6" Medium Unit | 6"h x 10"d x 12"/10"w | | 47 | | | |
| 6" Small Unit | 6"h x 10"d x 6"/4"w | | 23 | | | |
| Verazzo Stone | 6"h x 10-1/2"d x 16"/12"w | 1 Unit = 0.58 Sq. Ft. Avg. | 73 | 45 | 3,272 | 1 Unit = 1.16 l.f. Avg. |
| Verazzo Return Corner | 6"h x 8"d x 16"w | 0.67 Sq. Ft. | 62.8 | 48 | 3,015 | 1.33 l.f. |
| 3' Fire Pit Block/O.W. Fire Pit Block | 5-1/2"h x 6"d x 13-3/8"/9-1/8"w | — | 38 | 75 | 2,835 | — |
| 4' Fire Pit Block/O.W. Fire Pit Block | 5-1/2"h x 6"d x 15-1/2"/12-1/2"w | — | 39 | 75 | 2,910 | — |
| Universal Cap Unit | 3-1/2"h x 18"w x 12"d | 0.44 Sq. Ft. (3-1/2" x 18") | 62 | 56 | 3,472 | 1.5 l.f. |
| 3" Caps/Coping | | | | | | |
| 3" x 24" Cap | 3"h x 12"d x 24"w | 1/2 Sq. Ft. (3" x 24") | 72 | 48 | 3,504 | 2 l.f. |
| Country Corner | 3"h x 12"d x 12"w | 1/4 Sq. Ft. (3" x 12") | 36 | 96 | 3,504 | 1 l.f. |
| Coping Stone | 3-7/8"w x 12 7/8" Length x 2-3/8" Thick | 2.83 Pcs/Sq. Ft. | 10 | 117 | 1,170 | 0.33 l.f. |
| SPECIAL ORDER WALL STONES | | | | | | |
| Mini Straight Split | 4"h x 18"w x 11"d | 1/2 Sq. Ft. (4" x 18") | 43 | 63 | 2,709 | 1.5 l.f. |
| Mini Sculptured Split | 4"h x 18"w x 11"d | 1/2 Sq. Ft. (4" x 18") | 46 | 56 | 2,576 | 1.5 l.f. |
| Mini Cap Sculptured Split | 4"h x 18"w x 11"d | 1/2 Sq. Ft. (4" x 18") | 46 | 56 | 2,576 | 1.5 l.f. |
| 4" 90° Return Corner | 4"h x 18"w x 9"d | 1/2 Sq. Ft. (4" x 18") | 43 | 60 | 2,580 | — |
| Compac Cap Sculptured Split | 8"h x 18"w x 11"d | 1 Sq. Ft. (8" x 18") | 96 | 32 | 3,072 | 1.5 l.f. |
| Country Manor SE - Smooth Ends | | | | | | |
| 6" Large Unit | 6"h x 10"d x 16"/14"w | 1 Set = 1.4 Sq. Ft. Max. | 66 | 20 Sets/Cube | 2,928 | 1 Set = 2.5 l.f. Max. |
| 6" Medium Unit | 6"h x 10"d x 12"/10"w | | 47 | | | |
| 6" Small Unit | 6"h x 10"d x 6"/4"w | | 23 | | | |
| 3" Large Unit | 3"h x 10"d x 16"/14"w | 1 Set = 0.7 Sq. Ft. Max. | 35 | 40 Sets/Cube | 3,088 | 1 Set = 2.5 l.f. Max. |
| 3" Medium Unit | 3"h x 10"d x 12"/10"w | | 26 | | | |
| 3" Small Unit | 3"h x 10"d x 6"/4"w | | 12 | | | |
| Country Manor Return Corner | | | | | | |
| 6" Large Unit | 6"h x 10"d x 16"/14"w | 1 Set = 1.4 Sq. Ft. Max. | 70 | 20 Sets/Cube | 2,928 | 1 Set = 2.5 l.f. Max. |
| 6" Medium Unit | 6"h x 10"d x 12"/10"w | | 50 | | | |
| 6" Small Unit | 6"h x 10"d x 6"/4"w | | 25 | | | |
| 3" Country Manor Return Corner Large | 3"h x 10"d x 16"/14"w | 1 Set = 0.7 Sq. Ft. Max. | 36 | 40 Sets/Cube | 3,088 | 1 Set = 2.5 l.f. Max. |
| 3" Country Manor Return Corner Medium | 3"h x 10"d x 12"/10"w | | 27 | | | |
| 3" Country Manor Return Corner Small | 3"h x 10"d x 6"/4"w | | 13 | | | |
| Sculptured Split Face Units | | | | | | |
| Standard | 8"h x 18"w x 22"d | 1 Sq. Ft. (8" x 18") | 116 | 20 | 2,320 | 1.5 l.f. |
| Compac Sculptured Split Face | 8"h x 18"w x 11"d | 1 Sq. Ft. (8" x 18") | 78 | 36 | 2,808 | 1.5 l.f. |
| Straight Split Face Units | | | | | | |
| Standard | 8"h x 18"w x 22"d | 1 Sq. Ft. (8" x 18") | 128 | 20 | 2,560 | 1.5 l.f. |
| Universal Stair Tread | 3-1/2"h x 18"w x 20"d | 0.44 Sq. Ft. (3-1/2" x 18") | 106 | 28 | 2,968 | 1.5 l.f. |