
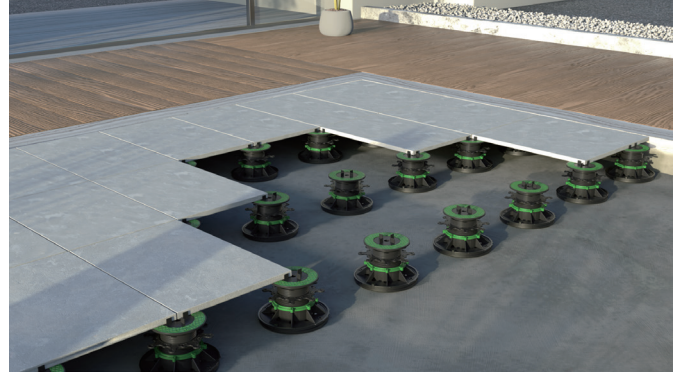


PEDESTAL SUPPLY

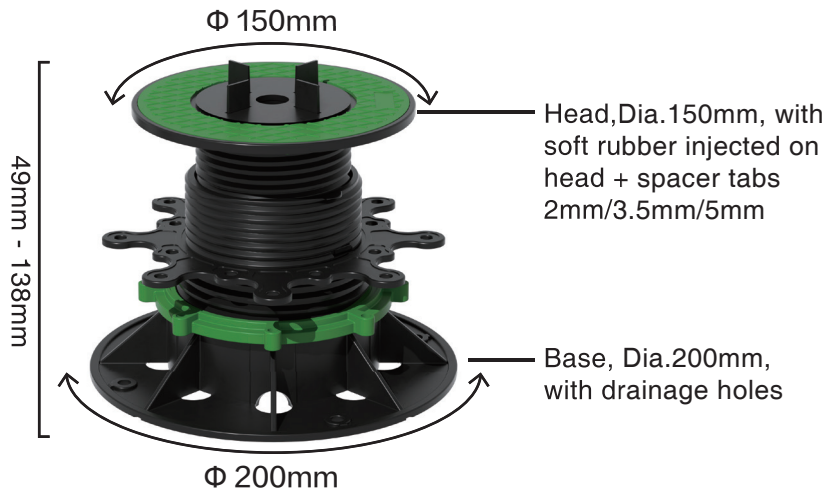

Adjustable Height

Adjustable height from 49mm to 138mm uninterrupted

Material

Polypropylene(PP), material thickness 4.5mm-6mm;
Composition 90% PP, 10% talc, UV and black masterbatch 100% recyclable

Dimensions

Head=diameter 150mm - surface area 176cm^2

Base=diameter 200mm- ground surface 314cm^2

Performance


Resisting UV rays, weather, sea salt and almost all chemicals
Temperature range: -40 degree celsius to +120 degree celsius

Application

Support for outdoor terraces with any kind of material: timber decking, stone, ceramic, composite material, metal, fiberglass grid... Can be placed on any stable substrate, also over insulation panels.

Slope corrector from 0-5%

Slope correctors could compensate ground fall 0-5%. making ideal levelling surface. It is assembled on the bottom of pedestals. Clients could choose to use it or not with different installing condition.

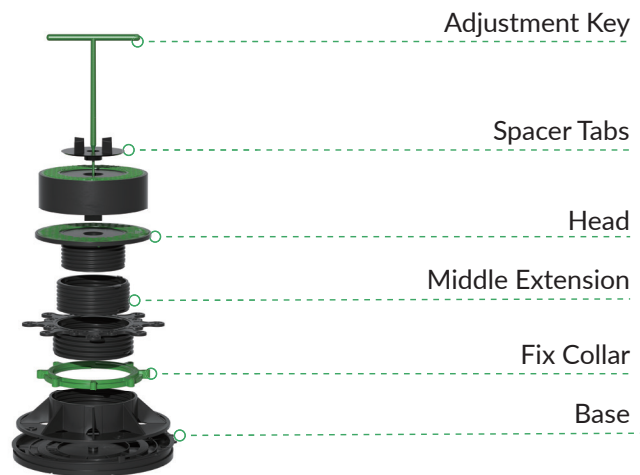

Compression Test

Performed on the full (1/1), half (1/2) or quarter (1/4) surface of the head

Position	Height(mm)	Yield(kgs)
1/1	92	980
1/2	92	880
1/4	92	750

Safety Value for maximum allowable load by compression for MB-X2

1. Safety for pedestrian terrace: divide the load indicated in the table by 2 with a safety factor of -15%.
2. Safety for technical floors: divide the load indicated in the table by 4 with a safety factor of -15%