

Hickory Rotisseries

Models: N/5.5 E



| | |
|--------------------|---------------------------|
| Machine Type | N / 5. 5 E |
| Total Power Rating | 6000 or 8400 Watts |
| Elements / Spits | 4 Elements with 5 Spits |
| Electrical Rating | 208/240 V or 380/410 V |
| Temperature Range | 200°F - 550°F |
| Timer | Manual or Fully Automatic |
| Delivery Date: | Final Inspection: |

Table of Contents

| | |
|---|----------|
| 1.0 Installation Instructions | 3 |
| 1.1 General Information | 4 |
| 1.2 Description of the Data Plate | 4 |
| 1.3 Machine Drawings and Dimensions | 6 |
| 1.4 Electrical Conversion and Adjustment Instructions | 7 |
| 1.5 Cooking Cycle | 7 |
| 1.6 Maintenance, Response to Technical Problems | 7 |
| 1.6.1 Reasons for Problems and Solutions | 8 |
| 1.7 Spit Drive Mechanism | 9 |
| 1.8 N/5.5E Parts List | 10 |
| 1.9 N/5.5E Exploded View | 12 |

1.0 Installation Instructions

- a. When installing these units, it is important to comply with the most recently established rules and regulations as deemed pertinent by the local and national electrical, ventilation, sanitation, and fire codes. These units are classified by Underwriters Laboratories, Inc. as Electrically Heated Food Service Equipment.
- b. Electric units must not be directly connected to a flue or exhaust vent. However, electric units may require operation in conjunction with a canopy type exhaust hood if deemed necessary by local authorities.
- c. The units must be installed in such a way that proper ventilation and heat exchange is assured. The room must be ventilated in accordance to the valid codes and regulations.
- d. The units are to be installed securely and horizontally. The units may be installed on combustible floors. The units must be installed with adjustable legs if placed on a combustible surface.
- e. The minimum clearance to the rear or side walls must be 13 inches. It is also important to insure that the bottom of the units is kept clear so that proper ventilation or air exchange can occur. Rear clearance can be reduced to 1" with the replacement of the rear glass with metal panels.
- f. Normally, the units will be sent to the operator already set up for the particular electrical service available at their location. However, unless otherwise specified, the electric units are set up for 208 V, 3 Phase, 60 Hz use. Before installing and using the units for the first time, it is important to make sure that the electrical power indicated on the data plate matches the type of electrical power available in the location. Should this not be the case, it is imperative to change or convert the units to the needed types.
- g. Electric units must be hard-wired or fitted with a power cord by a licensed electrician.

1.1 General Information



The Operating Instructions are to be given to the operator of the rotisserie. All unit operators are to be familiar with the functions of the rotisserie.



The Operating Instructions should be kept in a location close to the rotisserie. It should be easily recognizable and easily accessible.

Electric units can be ordered to meet most electrical specifications.

It is recommended that a repair and maintenance contract be signed with the manufacturer's agent, distributor, or service agency.

1.2 Description of the Data Plate

| | | |
|---|---|------------------------|
| HICKORY INDUSTRIES, INC. NORTH BERGEN, NJ 07047 | | |
| MODEL: <input type="text" value="N/5.5 E"/> M | SERIAL NO. <input type="text"/> | |
| MOTOR: 110 - 120 VOLTS 60 CYCLE AC | | |
| CURRENT | | |
| WATTS | SINGLE PHASE | 3 RPM |
| HEATING ELEMENTS LISTED | 208 VOLTS | AC 60 CYCLE |
| CURRENT | | |
|  | <input type="text" value="4"/> | 1400 WATTS PER ELEMENT |
|  | TOTAL WATTAGE <input type="text" value="6000"/> | |
| MFG. DATE <input type="text"/> | | |
| MINIMUM INSTALLATION CLEARANCES | | |
| SIDES: 13 INCHES | | |
| BACK: 13 INCHES | | |
| MAXIMUM WATTAGE PER LAMP 40 WATTS | | |

| | | |
|--|---|------------------------|
| HICKORY INDUSTRIES, INC. NORTH BERGEN, NJ 07047 | | |
| MODEL: <input type="text" value="N/5.5 E"/> M | SERIAL NO. <input type="text"/> | |
| MOTOR: 110 - 120 VOLTS 60 CYCLE AC | | |
| CURRENT | | |
| WATTS | SINGLE PHASE | 3 RPM |
| HEATING ELEMENTS LISTED | 208 VOLTS | AC 60 CYCLE |
| CURRENT | | |
|  | <input type="text" value="4"/> | 1400 WATTS PER ELEMENT |
|  | TOTAL WATTAGE <input type="text" value="6000"/> | |
| MFG. DATE <input type="text"/> | | |
| MINIMUM INSTALLATION CLEARANCES | | |
| SIDES: 13 INCHES | | |
| BACK: 13 INCHES | | |
| MAXIMUM WATTAGE PER LAMP 40 WATTS | | |

WARNING!

This unit must be installed and connected in accordance to the latest regulations and may require operation in conjunction with a forced ventilation or exhaust hood.

This unit has been designed for professional use only and may only be installed or repaired by licensed service agencies!



Before installing or using this equipment, read these instructions!

HICKORY INDUSTRIES, INC.
NORTH BERGEN, NJ 07047

MODEL: M SERIAL NO.

MOTOR: 208 - 220 VOLTS 60 CYCLE AC CURRENT
WATTS SINGLEPHASE 3 RPM
HEATING ELEMENTS 208 VOLTS 60 CYCLE

LISTED 3 PHASE AC
CURRENT

  1400 WATTS PER ELEMENT
TOTAL WATTAGE

MFG. DATE



MINIMUM INSTALLATION CLEARANCES
SIDES: 13 INCHES
BACK: 13 INCHES
MAXIMUM WATTAGE PER LAMP 40 WATTS

HICKORY INDUSTRIES, INC.
NORTH BERGEN, NJ 07047

MODEL: M SERIAL NO.

MOTOR: 110 - 120 VOLTS 60 CYCLE AC CURRENT
WATTS SINGLEPHASE 3 RPM
HEATING ELEMENTS 208 VOLTS 60 CYCLE

LISTED 3 PHASE AC
CURRENT

  2000 WATTS PER ELEMENT
TOTAL WATTAGE

MFG. DATE



MINIMUM INSTALLATION CLEARANCES
SIDES: 13 INCHES
BACK: 13 INCHES
MAXIMUM WATTAGE PER LAMP 40 WATTS

HICKORY INDUSTRIES, INC.
NORTH BERGEN, NJ 07047

MODEL: M SERIAL NO.

MOTOR: 208 - 240 VOLTS 50 CYCLE AC CURRENT
WATTS SINGLEPHASE 3 RPM
HEATING ELEMENTS 208 VOLTS 50 CYCLE

LISTED 1 PHASE AC
CURRENT

  1400 WATTS PER ELEMENT
TOTAL WATTAGE

MFG. DATE



MINIMUM INSTALLATION CLEARANCES
SIDES: 13 INCHES
BACK: 13 INCHES
MAXIMUM WATTAGE PER LAMP 40 WATTS

HICKORY INDUSTRIES, INC.
NORTH BERGEN, NJ 07047

MODEL: M SERIAL NO.

MOTOR: 208 - 240 VOLTS 50 CYCLE AC CURRENT
WATTS SINGLEPHASE 3 RPM
HEATING ELEMENTS 208 VOLTS 50 CYCLE

LISTED 3 PHASE AC
CURRENT

  1400 WATTS PER ELEMENT
TOTAL WATTAGE

MFG. DATE



MINIMUM INSTALLATION CLEARANCES
SIDES: 13 INCHES
BACK: 13 INCHES
MAXIMUM WATTAGE PER LAMP 40 WATTS

HICKORY INDUSTRIES, INC.
NORTH BERGEN, NJ 07047

MODEL: M SERIAL NO.

MOTOR: 208 - 240 VOLTS 50 CYCLE AC CURRENT
WATTS SINGLEPHASE 3 RPM
HEATING ELEMENTS 208 VOLTS 50 CYCLE

LISTED 3 PHASE AC
CURRENT

  2000 WATTS PER ELEMENT
TOTAL WATTAGE


MFG. DATE

MINIMUM INSTALLATION CLEARANCES
SIDES: 13 INCHES
BACK: 13 INCHES
MAXIMUM WATTAGE PER LAMP 40 WATTS


1.3 Machine Drawings and Dimensions

The following drawing of the Front View, Side View, and Top View indicate where the dimensions are taken and should be used to plan the installation of the units.


N/ 5.5 E

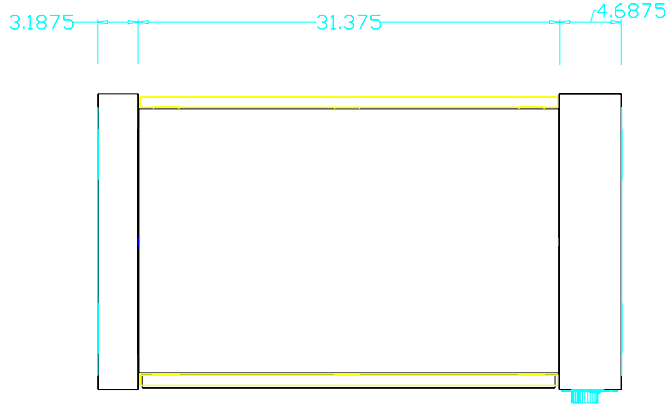

Top View

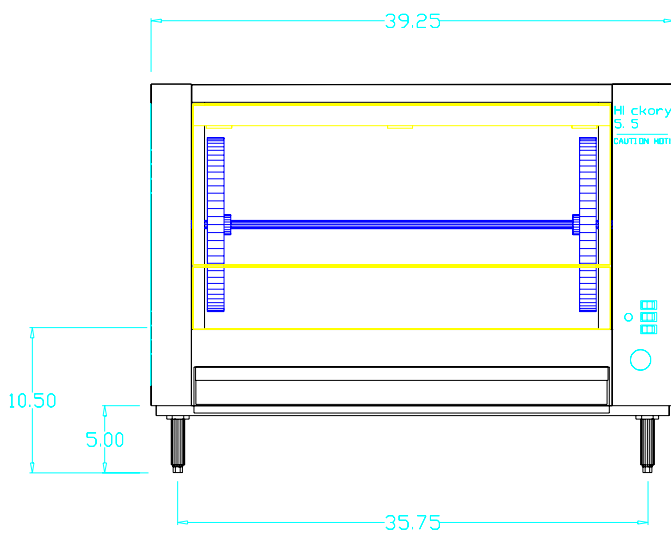

Front View

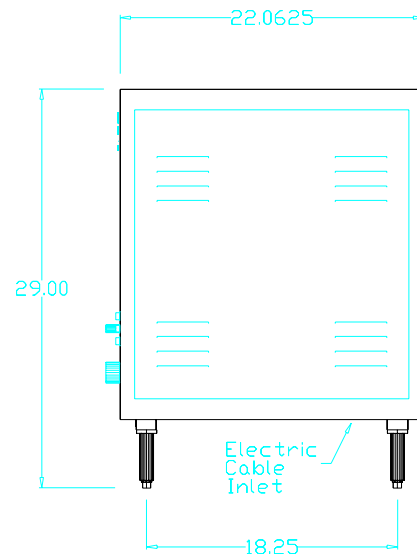

Right Side View

| N/ 5.5 E | inches | mm |
|----------|----------|-----|
| Height | 29" | 737 |
| Width | 39-1/4" | 997 |
| Depth | 22-1/16" | 560 |

1.4 Electrical Conversion and Adjustment Instructions

Before converting or adjusting the machine to another type of electricity, it is imperative that electrical power to the machines should also be turned off. When converting, make sure that the proper electrical diagram is followed and that the motor and timer match the connected single phase voltage!

1.5 Cooking Cycle

In order to start the cooking cycle, the elements must be powered. The heating cycle will start only when the following procedure is followed:

- a. The TEMPERATURE switch is turned to "on".
- b. A cooking temperature must be set on the thermostat (i.e. 450°F).
- c. The cooking timer must be activated (see Operating Instructions).

Once these steps are completed, the unit will call for heat and the cooking cycle will be activated. The main contactor, which powers the heating elements, will stay on until the set cooking temperature is reached, as sensed by the thermocouple attached to the thermostat. With the temperature reached, the electrical power to the elements will be cut off as the thermostat shuts off the power to the contactor. When the temperature drops below the set point, electrical power is again sent to the heating system, thus starting the heating process all over. The system will cycle on and off as needed to maintain the set cooking point.

1.6 Maintenance, response to technical problems.

Should a technical problem arise for any reason, shut off the machine and call for technical service.


A routine maintenance should be carried out at least once a year. Contact your local, certified service company for maintenance.

1.6.1 Reasons for Problems and Solutions

| Problem | Cause | Solution |
|------------------------------|---|---|
| Unit does not heat. | a. Rotisserie not "on". | <ol style="list-style-type: none"> 1. Make sure that the TEMPERATURE switch is on. 2. Thermostat must be set (i.e. 550°F). The cooking timer must be operational (cook cycle). 3. A red LED on the TEMPERATURE switch indicates that the contactor is supplying power to the heating elements. 4. Using the electrical diagram, make sure that the entire system is fully functional. |
| Unit takes too long to cook. | <p>a. Temperature set too low.</p> <p>b. Timer is not properly set.</p> <p>c. Chicken are too big.</p> <p>d. Not enough power is being supplied to the unit.</p> <p>e. The lower metal deflectors are on backwards.</p> | <p>a. To cook chickens, we suggest that the temperature be set to MAXIMUM. If the chickens are "burning", which is usually due to sugars in the marinade or rub, then the temperature must be reduced accordingly.</p> <p>b. When programming the timer, it will only heat up the rotisserie when a "cook pot" appears on the display. Before setting a cooking time, make sure that enough time is programmed!</p> <p>c. A load of 20 chickens, each about 3.25 lbs., will take about 1 hour and 30 minutes to cook in a 6400 Watt unit. The larger the chickens, the longer the cooking time.</p> <p>d. Make sure that the hot, neutral, and ground leads are properly matched up. Also make sure that all of the phases are live.</p> <p>e. The two lower heating elements have two concave deflectors which direct the heat towards the center of the chamber. A common error is to cover the elements, preventing the heat from reaching the center of the unit.</p> |

1.7 Spit Drive Mechanism

This unit is equipped with a planetary motion spit drive system. This means that each spit is turning upon its axis at the same time that they turn about the center shaft. When the motor switch is turned to on, the disks and the spits will begin to turn. Insure that the mechanism turns smoothly when testing the unit.

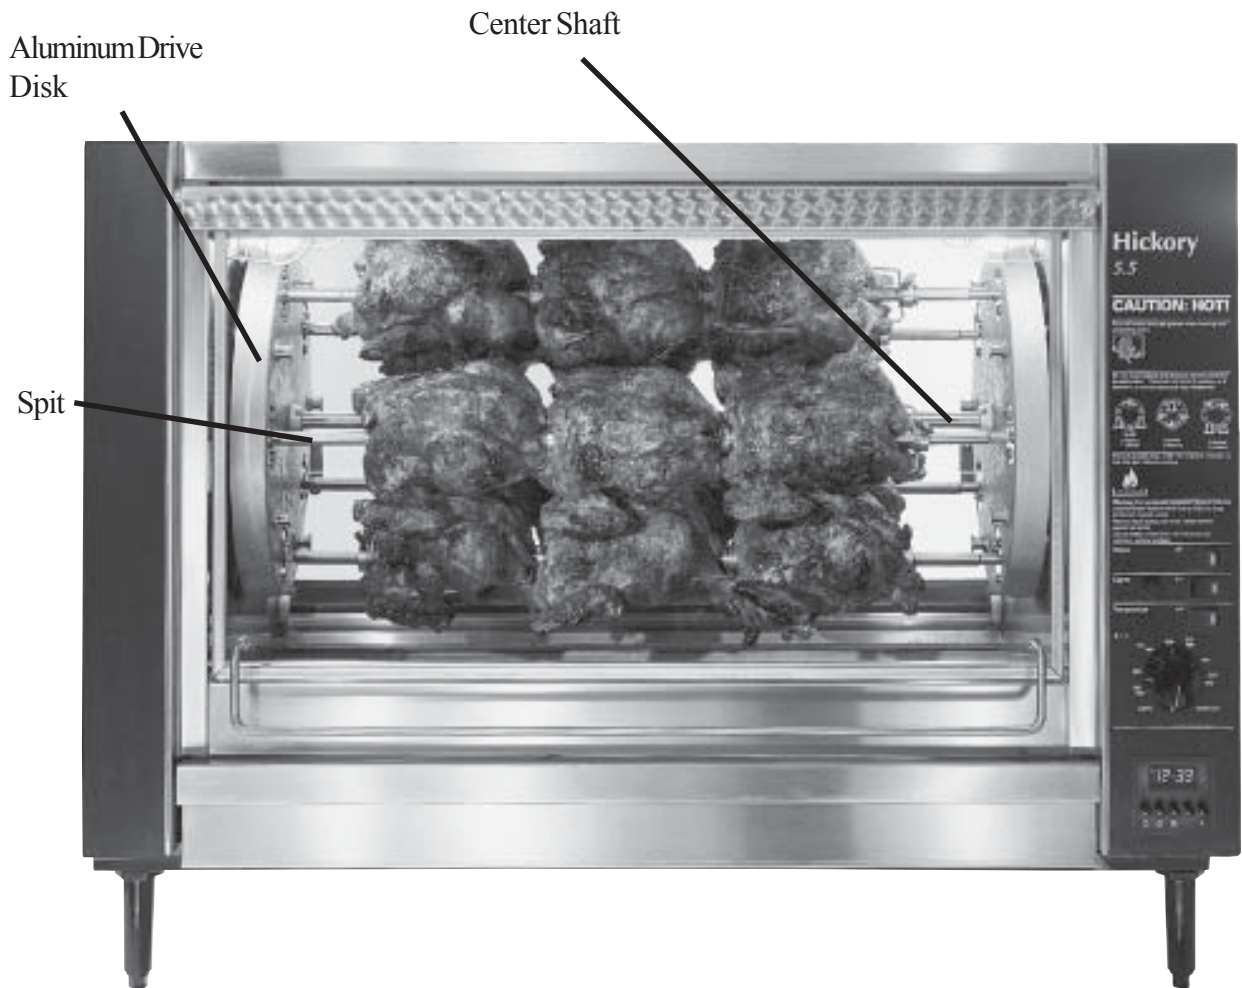

Before cooking, it is imperative that the center shaft be covered and protected with aluminum foil. This will prevent fats from carbonizing on the shaft, making the removal of the aluminum disks much easier in the future. If the shaft is not protected, it may eventually be impossible to remove the disks should there be a problem in the spit drive mechanism.

The driven and the stationary drive gears are located behind the aluminum drive disk. These can be viewed by taking out the removable aluminum disks. The driven gears and the stationary gear should be viewed once a week to check for fat or carbonization build-up. Any fat or dirt should be cleaned off since a build-up will eventually damage the drive system.


1.8 N/5.5E Parts List

| Item | Qty. | Description | Material | Length | Size | Manufacturer |
|------|------|--|-----------------|--------|-------|--------------|
| 553 | 1 | Shaft 5/8 (Removable Drums - Center) | SS | | 5/8" | Hickory |
| 554 | 1 | Shaft Locking Slide | SS | | | Hickory |
| 519 | 1 | Drive Bearing Holder (Left - with brass bearing) | Steel (Chromed) | | | Hickory |
| 520 | 1 | Drive Bearing Holder (Right - with teflon bearing) | Steel (Chromed) | | | Hickory |
| | 1 | Brass Shaft Bearing | Brass | | | Hickory |
| 566 | 1 | Teflon Shaft Bearing | Teflon | | | Hickory |
| 501 | 1 | Aluminum Disk Drive (Bare) | Cast Aluminum | | | Hickory |
| 502 | 1 | Aluminum Disk Slave (Bare) | Cast Aluminum | | | Hickory |
| 503 | 1 | Alum. Disk Drv. (Complete w/ Spit Driven Gears) | | | | Hickory |
| 504 | 1 | Alum. Disk Slave (Complete w/ Spit Supports) | | | | Hickory |
| 514 | 1 | Disk Retaining Pin | Steel | 1-1/2" | 5/32" | Hickory |
| 564 | 5 | Teflon Spacers - 1/4" round | | | | Hickory |
| 505 | | Aluminum Disk Teflon Coating | | | | Hickory |
| 561 | 5 | Spit Driven Gear Assembly | Steel (Chromed) | | | Hickory |
| 555 | 5 | Snap Ring (Gears) | Steel | | | Hickory |
| 559 | 5 | Spit Driven Gear Bearing Holder | Steel (Chromed) | | | Hickory |
| 560 | 5 | Spit Driven Gear | Steel (Chromed) | | | Hickory |
| 565 | 5 | Teflon Spit Driven Gear Bearing | | | 1/4" | Hickory |
| 563 | 1 | Stationary Gear | Steel | | | Hickory |
| 562 | 5 | Spit Support | Steel (Chromed) | | | Hickory |
| 510 | 1 | Chain (Roller - 5.5) | Steel | | | Hickory |
| 511 | 1 | Chain Link (Roller - 5.5) | Steel | | | Hickory |
| 521 | 1 | Drive Sprocket - Roller Chain | Steel | | | Hickory |
| 522 | 1 | Driven Sprocket - Roller Chain | Steel | | | Hickory |
| | 1 | Drive Shaft | | | | |
| 512 | 1 | Chain Tensioner | Steel | | | Hickory |
| 509 | 1 | Buss Fuse 0.5 Amp | | | | Buss |
| 527 | 1 | Fuse Holder 0.5 Amp | | | | |
| 538 | 4 | Lamp Cover | Steel (Chromed) | | | Hickory |
| 541 | 3 | Micro Switch & Toggle | | | | Marquardt |
| 567 | 1 | Thermostat 200-550 | | | | |
| 568 | 1 | Thermostat Knob | | | | |
| 569 | 1 | Timer (without Adapter) | | | | Eaton |
| 569a | 1 | Adapter (for Timer) | | | | Eaton |
| 542 | 1 | Motor Gear - 120V | | | | Bodine |
| 539 | 1 | Lamp, 120 V | | | | Hickory |
| 540 | 4 | Lamp Socket | Ceramic | | | Leviton |
| 120 | 1 | Drip Pan (5.5) | SS | | | Hickory |
| 121 | 1 | Drip Pan Plug | Brass | | | Hickory |
| 122 | 1 | Drip Pan Receptacle | Brass | | | Hickory |

1.8 N/5.5E Parts List (Contd.)

| Item | Qty. | Description | Material | Length | Size | Manufacturer |
|------|------|--|-----------------|--------|----------------|--------------|
| 123 | 1 | Electrical Grounding Cap | | | | Hickory |
| | | Electrical Wire | | | | Janor Wire |
| 106 | 1 | Buchanan Contact Section 824 | | | | Buchanan |
| 107 | 1 | Buchanan Contact Section 830 | | | | Buchanan |
| 550 | 1 | Relay (Contactor) 3 Pole 220V | | | | GE |
| | 1 | Capacitor | | | | GE |
| 525 | 8 | Element Holder | | | | Hickory |
| 129 | 4 | Element Porcelain Insulator | | | | Hickory |
| 523 | 4 | Element, Straight 220 V - 1400 Watt | | | | Glenn |
| 524 | 4 | Element, Straight 240 V - 1400 Watt | | | | Glenn |
| 549 | 2 | Reflector | SS | | | Hickory |
| 513 | 2 | Glass Hinge | SS | | | Hickory |
| 515 | 2 | Door Bearing Brass | Brass | | | Hickory |
| 516 | 1 | Door Handle (Metal) | Steel | | | Hickory |
| 518 | 1 | Door Spring (Mechanical) | Steel | | | Hickory |
| 545 | 1 | Pneumatic Spring | | | | |
| 532 | 1 | Glass Tempered Large (Door) | Glass | | 28.94" x 16.5" | Hickory |
| 533 | 1 | Glass Tempered (Rear) | Glass | | 28.94" x 12" | Hickory |
| 534 | 1 | Glass Tempered (Rear - Small) | Glass | | 28.94" x 4.5" | Hickory |
| 526 | 4 | Feet Adjustable Plastic | Plastic | | | Hickory |
| 556 | 5 | Spit Complete (incl. all skewers & screws) | SS | | | Hickory |
| 185 | | 5/Spit Skewer Double | SS | | | Hickory |
| 186 | | 5/Spit Skewer Single | SS | | | Hickory |
| 219 | | 1/Skw.Thumb Screw | Steel | | | Hickory |
| 557 | 1 | Spit Turkey Center only | SS | | | Hickory |
| 225 | 2 | Turkey Skewers Single | SS | | | Hickory |
| 506 | 5 | Basket Hanging | Steel (Chromed) | | | Hickory |
| 507 | 5 | Basket Bearing Brass | Brass | | | Hickory |
| 439a | | Angle (V) Spits (Option!) | SS | | | Hickory |
| 508 | | Basket Spits (| Steel (Chromed) | | | Hickory |

1.8 N/5.5E Exploded View

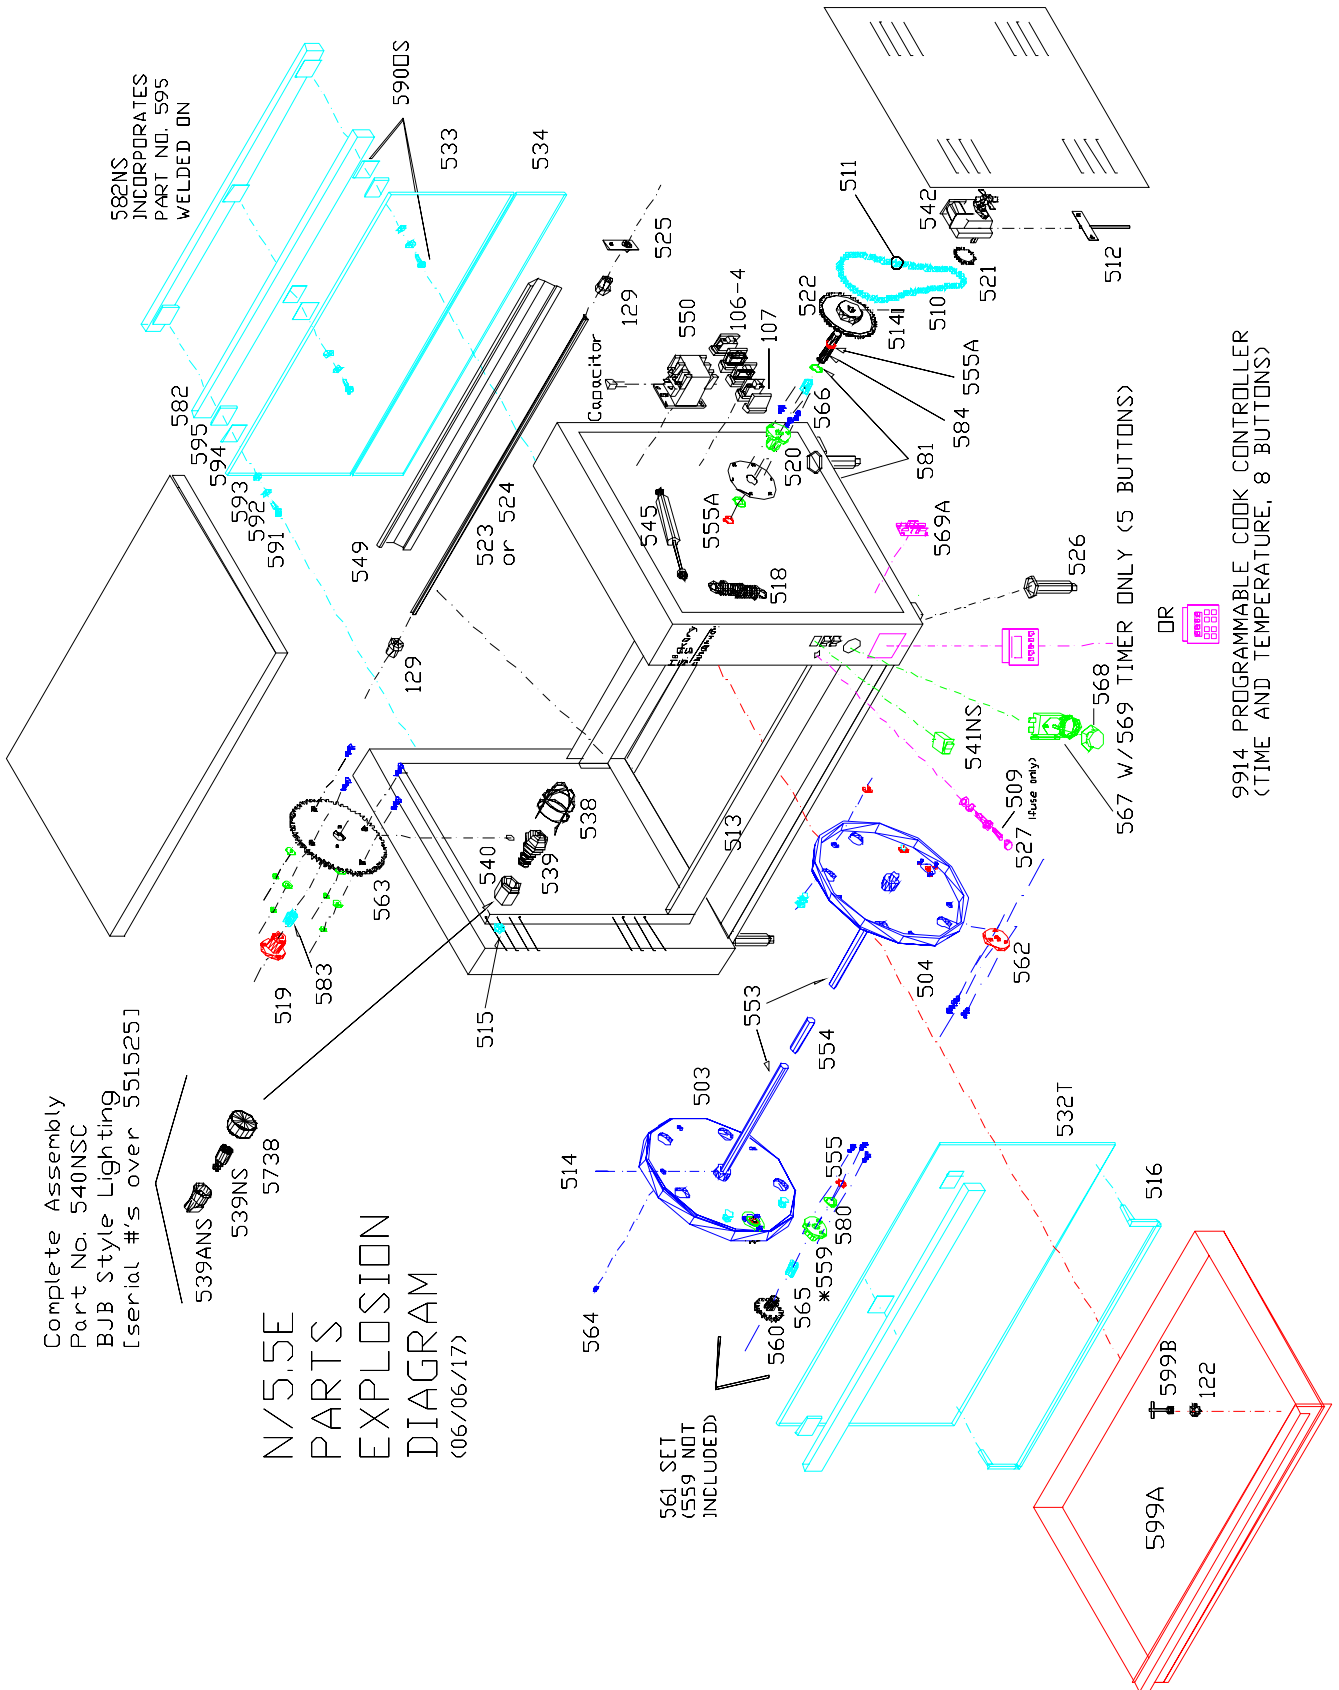


Glass Replacement on the 5.5E & 10.10E Machines

Make sure that the handle and all associated hardware is available at the site or order the mounting kit from Hickory.

Make sure that the glass bar is in the open position.




Closed Position

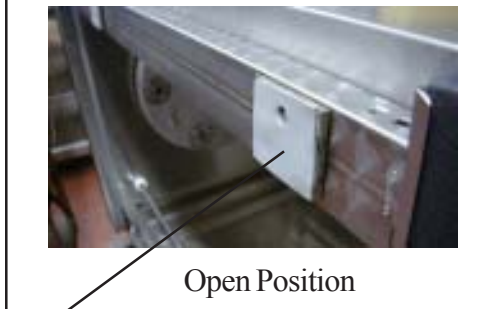

Open Position


Newer style units incorporate the spacer welded on the glass bar..

Upper mounting hardware

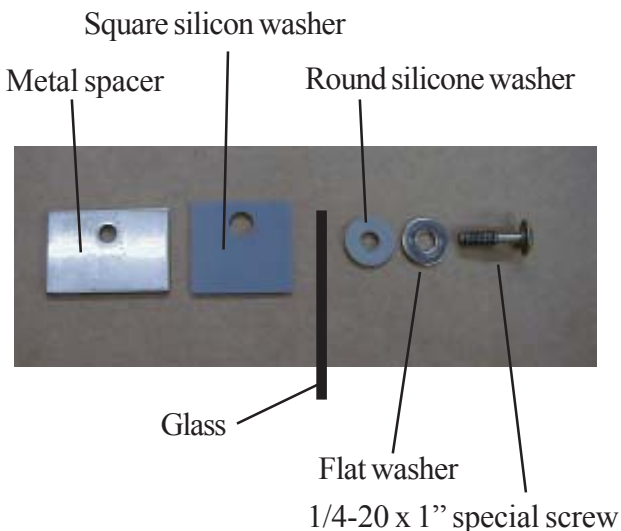

Make sure that the handle and all associated hardware is available at the site or order the mounting hardware from Hickory.

Glass handle, flat washer, lock washer, 10/32 screw

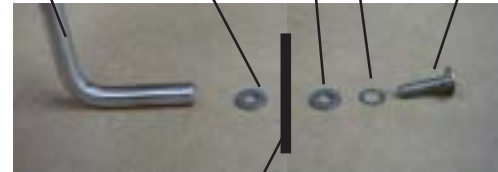

Glass

The glass mounts between the glass handle and the flat washer.

Install the glass handle. Be sure to use Loc-Tite.

Glass Frame

Glass Handle



NOTE: THE 90 BEND ON THE GLASS HANDLE IS LOWER THAN THE GLASS. DO NOT MOUNT THE HANDLE WITH THE 90 DEGREE BEND UP.

USE HIGH TEMPERATURE LOC-TITE on all screws for both the glass handle and the upper mounting screws.

Otherwise the handle will come loose and chip the glass or fall slightly and chip around the mounting screw holes. This will lead to breakage!

Replacing the front glass

Insert the screw on to the glass (use hi heat Loc-tite). As a hint, start with the middle screw it will give you some leverage with the glass.



Slowly turn the screw onto the glass bar - **DO NOT TIGHTEN**. Make sure that you do not see any threads or that the glass rests on the threads.

Make sure that when resting the glass on the screws, it only rests on the un-threaded portion of the screw (closest to the head of the screw).

Before moving glass make sure threads are inserted onto metal spacer



Threads Exposed

DO NOT TIGHTEN. This will ensure that you have enough play to move the glass around without bumping the glass.

Proceed with the remaining screws (use hi heat Loc-tite). Make sure that the glass is sandwiched between silicone washer and the silicone spacer.

Silicone Washer


Silicone Spacer



Slightly turn each screw until snug. It should be snug but loose enough to move. Adjust the glass so that the spacing is even around the sides and bottom of the machine. You can now verify the glass spacing with the side and the bottom of the machine.


Improperly Spaced

**Note:
Uneven
Spacing**



Properly Spaced

**Note:
Even
Spacing**



If the glass is not evenly spaced, adjust the glass until its evenly spaced.

CAUTION: If the screws are not snug enough, when lowering the glass door, the glass may hit the screws and chip the glass.

CAUTION: When tightening the screws, if the glass shifts down, the glass door will be too close to the roof of the machine when the glass door is shut.

Open door and tighten upper mounting screws.

Close the door and verify that the side and bottom spacing is even all around.

Make sure all screws are tight and have been replaced using hi **heat Loc-Tite**.

Return equipment back to operating condition.

Caution

Operators should not use a razor blade or knife to clean the glass.

Glass should not be cleaned with abrasives, soft scrub or any pad, i.e. Brillo, Scotch Brite, scouring pad etc. This will scratch the glass and render the glass faulty.

Tempered glass will break if scratched, shipped or mishandled in any way. It can break in a day or a year. BUT IT WILL BREAK.